

Customer :

Project Name :

Project No. :

Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

www.hd-hyundaelectric.com

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HES1-18-143/5JP	Item No.		Rev. No.	[]
Project Name		Project No.		Quantity	sets

GENERAL SPECIFICATION			PERFORMANCE DATA		
Frame Size	145JP		Rated Output	0.75 kW	1 HP
Type	PJP		Number of Poles	4	
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage	
Method of Cooling	IC411(FC)		Starting Method*	D.O.L	
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V 230 V
Number of Phases	3		Current	Full Load	1.26 A 1.57 A 3.15 A
Insulation Class	F			Locked-rotor**	930 % 930 % 930 %
Temp. Rise at full load (by resistance method)			Efficiency		
	at 1.0 S.F	80 deg. C		50% Load	82.5 %
Motor Location	☐ Indoor ☐ Outdoor			75% Load	84.5 %
Altitude	Less than 1,000 meter			100% Load	85.5 %
Relative Humidity	Less than 80 %		Power Factor(p.u)		
Ambient Temp.	40 deg. C (Max.)			50% Load	0.550
Duty Type	Continuous (S1)			75% Load	0.650
Service Factor	1.15			100% Load	0.700
Mounting	B35		Speed at Full Load	1755 r.p.m	
Bearing	Type	Anti-Friction	Torque		
	DE/N-DE	6206ZZC3 / 6204ZZC3		Full Load	3.01 lb.ft
	Lubricant	Grease(Polyrex-EM)		Locked-rotor**	280 %
External Thrust	Not applicable			Breakdown**	310 %
Coupling Method	☒ Direct ☐ V-belt		Moment of Inertia (J)		
Shaft Extension	Single			Load(Max.)	7.910 lb.ft2
Terminal	Main	Cast Iron		Motor	0.059 lb.ft2
Box	Aux.	No	Sound Pressure Level (No-load & mean value at 1m from motor)		
	Location	Refer to Outline Drawing		56 dB(A)	
Application			Vibration	3.8 mm/s (peak)	
Area classification	Hazardous		Permissible number of consecutive starts	Cold 3 times	
Type of Ex-Protection	Class I&II, Division 2			Hot 2 times	
Applicable Standard	NEMA MG1, CSA C390		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)

ACCESSORIES	SUBMITTAL DRAWING
	Outline Dimension Drawing \ Motor Weight(Approx.)
	B35 LM-T2145C4JLV25 65 lb.

REMARK
1. Premium efficiency according to NEMA MG1 2. Inverter Duty @ 1.0 Service Factor & F Temperature rise -. 10:1 VT (20:1 VT at 50% load) -. 10:1 CT -. CHP up to 1.5 times base speed, NEMA MG1 Part31 3. CSA Certification -. Class I, Division 2, Group A, B, C & D -. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.) 4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power. 5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous. 6. Temp. code : T3C(160°C) at sine wave
Date DSND CHKD CHKD APPD
2025-09-19 S.H. LEE I.K. KIM R.G. KIM S.W. KIM

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

MAIN NAMEPLATE

3.94

1HP		4P		230/460V		Amps 3.15/1.57A		Type HLS		Amb. 40°C	
Frame 145JP		Duty CONT		Encl. TEFC		Model HLS145PR235V		NEMA Nom. Eff. 85.5%			
RPM 1755		Hertz 60Hz		S.F. 1.15		INS. Class F		HD-F1		3/4 Eff. 84.5%	
Bearing		Drive 6206ZZC3		S.F.1.25 (When 100HP or less, Temp Rise F & Non-Hazardous)				NEMA Design B			
Usable at		Opp. 6204ZZC3		S.F.1.00 (10:1 C.T., 20:1 V.T., NEMA-MG1 Part31)				Code L			
50Hz 1HP 380V 1.97A 1440rpm S.F.: 1.15 Eff.: 82.5% Code: J											
50Hz 1HP 400/415V 1.96/1.97A 1450/1450rpm S.F.: 1.15 Eff.: 82.5/82.5% Code: K/L											
CSA Certified for		Model -		Type PJP		Temp. Code		Frame 140-320FR			
CLASS I, Div. 2, Gr. A, B, C & D		CLASS II, Div. 2, Gr. E, F & G				(Sine Wave)		Amb.40°C T3C (160°C)			
CLASS I, Zone 2, Gr. IIA, IIB & IIC		(Gr. E : up to 320FR)						Amb.55°C T3A (180°C)			
No. -		Date -		Weight 65 lb							
4M-137664		MARINE DUTY IEEE45		Made in Vietnam H4		Designed By HYUNDAI, Korea		HD HYUNDAI ELECTRIC			
CC038A											

WIRING DIAGRAM

D.O.L (INVERTER & SOFT STARTER)  WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. LOW VOLTAGE T4 T5 T6 T7 T8 T9 T1 T2 T3 L1 L2 L3 INTERNAL CONNECTIONS T1 T4 T5 T2 T7 T8 T9 T6 T3 HIGH VOLTAGE T4 T5 T6 T7 T8 T9 T1 T2 T3 L1 L2 L3 KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128845	WYE-DELTA (Y-D) N/A
--	---

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HES, JM/JP, 143-215)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	NONE	TITLE		A4 (1:1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	NAMEPLATE DRAWING		
DSND BY	S.H.LEE	DATE	2024.06.07	REF. NO	4M-137664 / 4M-128845	Sheet No. of
HD HYUNDAI ELECTRIC				DWG NO	NP-HES1-18-143/5JP	Revision No. 0

Type : PJP

0.75kW 1HP 4 P 60 Hz

Full Load Torque : 3.01 lb.ft

Speed at Full Load : 1755 RPM


Load moment of Inertia (J) : 7.910 lb.ft²

Rated Voltage	575V	460V	230V
---------------	------	------	------


Motor moment of Inertia (J) : 0.059 lb.ft²

Full Load Current	1.26A	1.57A	3.15A
-------------------	-------	-------	-------




SPEED VS TORQUE & CURRENT CURVE

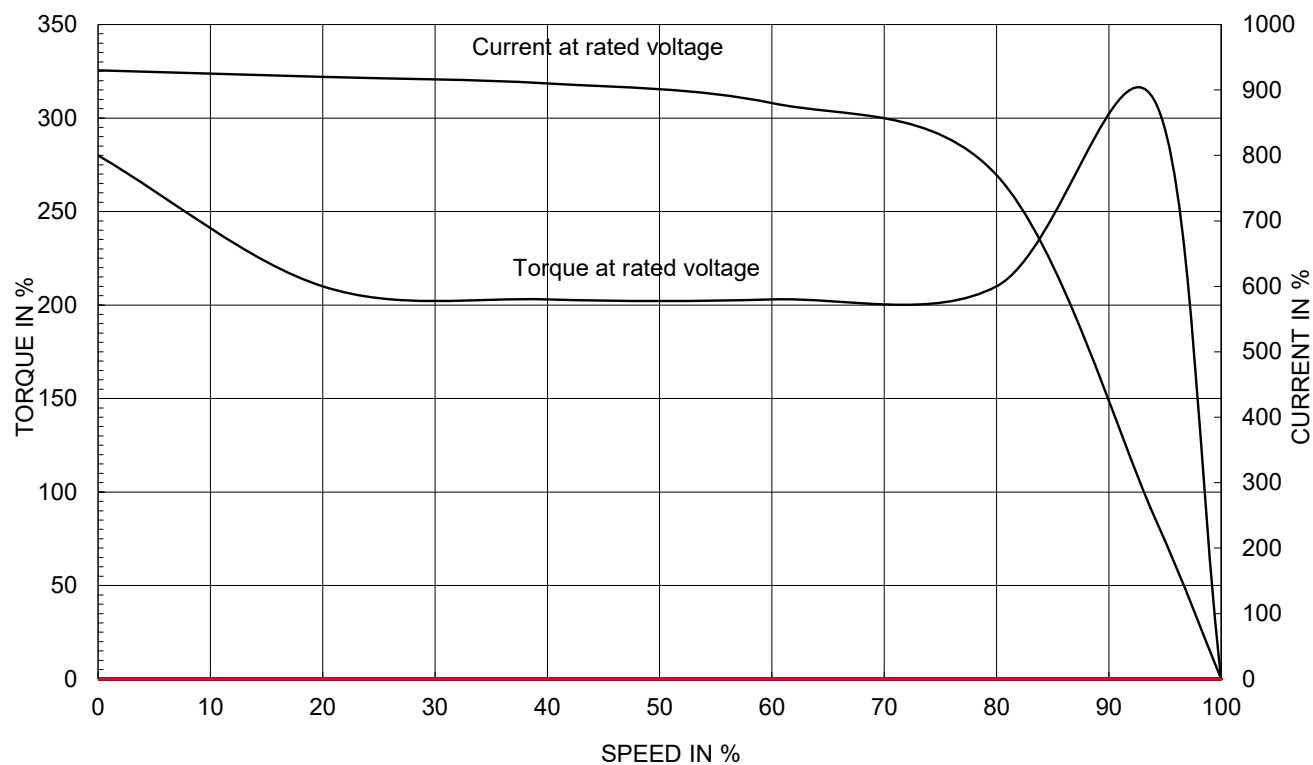

OUTPUT VS EFF., P.F & CURRENT CURVE

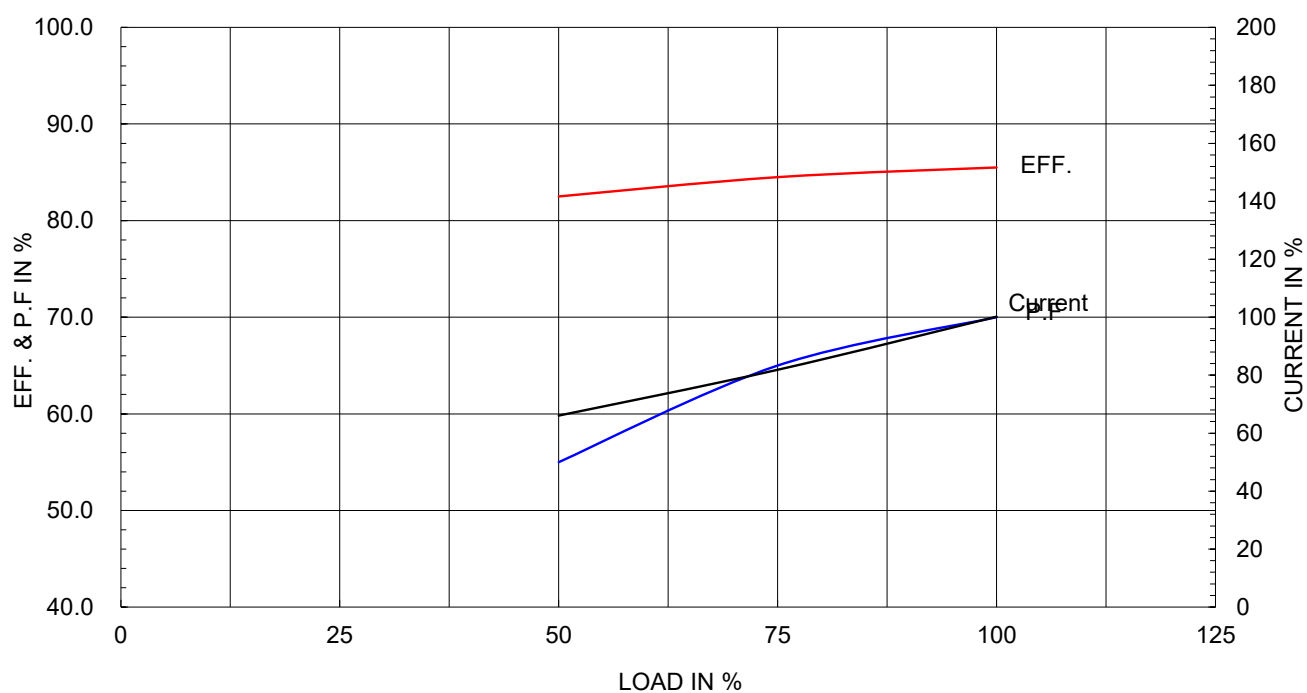

1	2	3	4	
REV	DATE	CONTENTS	REVD BY	CHKD BY

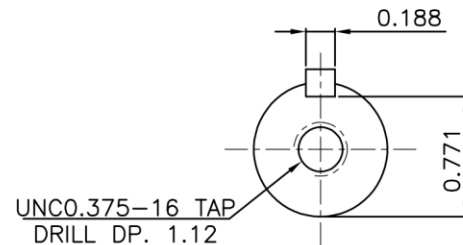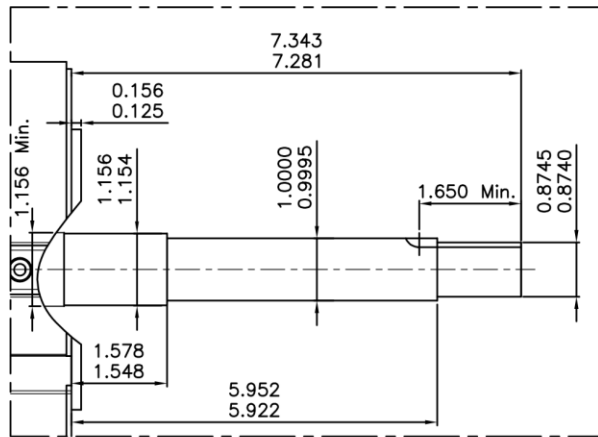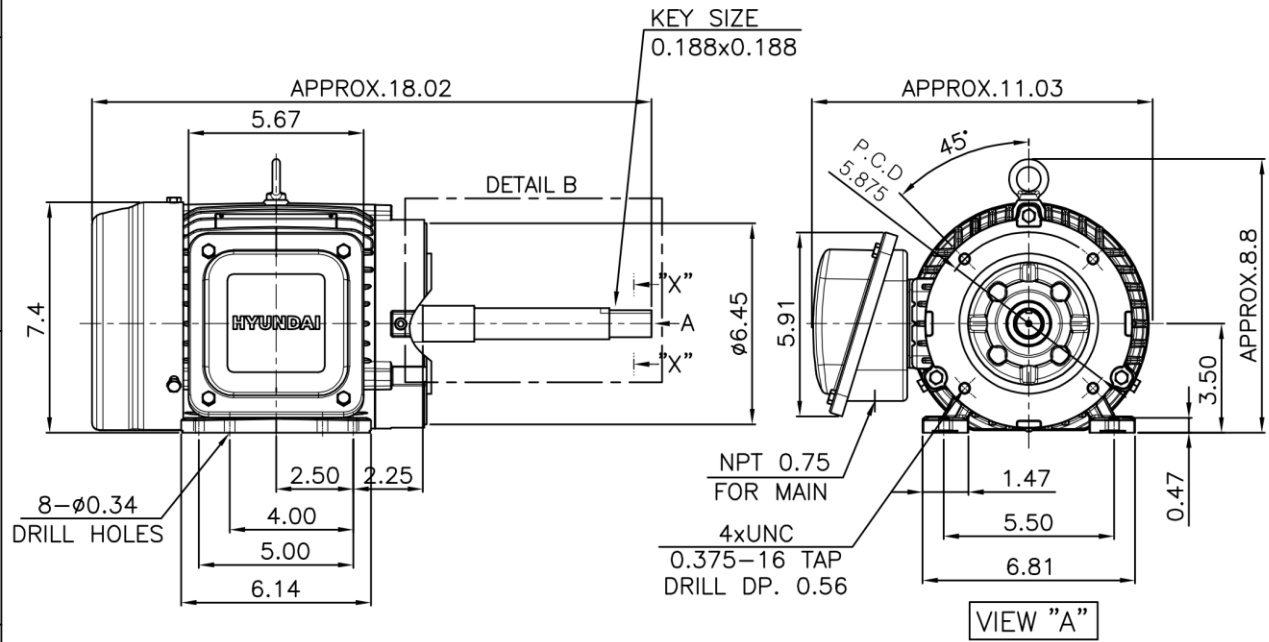

SECTION "X-X"
SCALE 5/6


NOTE

[TOLERANCE]

- CENTER HEIGHT : +0.00inch - 0.03inch
- SHAFT DIAMETER : +0.000inch - 0.0005inch
- KEYWAY DEPTH : +0.000inch - 0.015inch

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	NEMA 143/5TC (JP) (Dual hole)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	1/6	TITLE	OUTLINE	A4 (1/6)
CHKD BY		PROJEC'N	3rd Angle			
DSND BY	S.H.LEE	DATE	2025-01-17	REF. NO		Sheet No. of
				DWG NO	LM-T2145C4 JLV25	Revision No. 1

Cls. I&II, Div. 2 IEEE 841

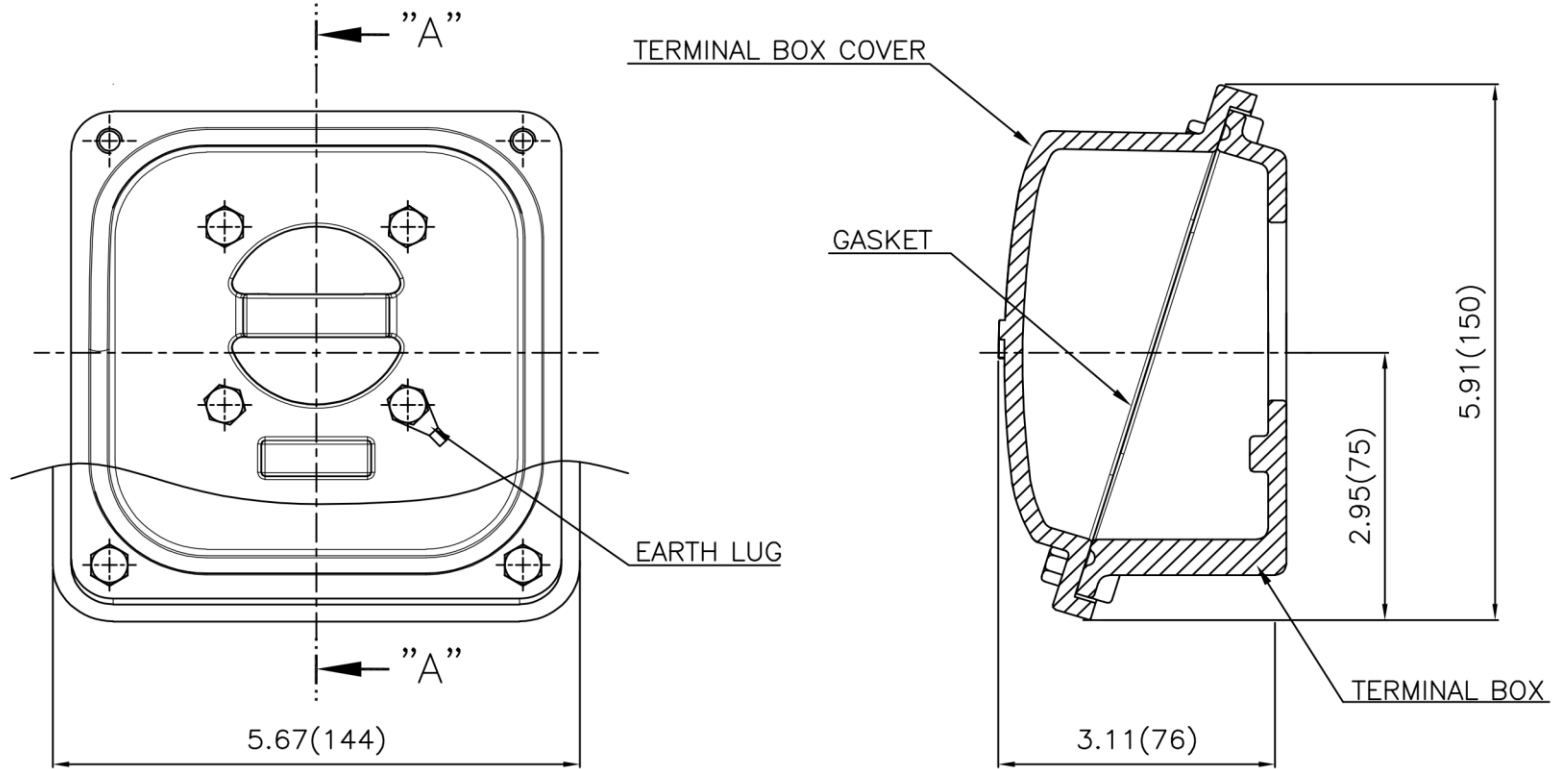

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						

일반가공공차		일반재공공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 140-180 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/1.5	TITLE	TERMINAL BOX ASS'Y	A3 (1:1.5)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬피	DATE	2023-10-19	DWG NO	3M-248456	Revision No.	0

