

Customer :

Project Name :

Project No. :

Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

www.hd-hyundaielectric.com

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HES10-12-254/6JP	Item No.		Rev. No.	[]
Project Name		Project No.		Quantity	sets

GENERAL SPECIFICATION			PERFORMANCE DATA					
Frame Size		256JP		Rated Output		7.5 kW 10 HP		
Type		PJP		Number of Poles		6		
Enclosure(Protection)		Totally Enclosed / IP55		Rotor Type		Squirrel Cage		
Method of Cooling		IC411(FC)		Starting Method*		D.O.L		
Rated Frequency		60 Hz		Rated Voltage		575 V	460 V	230 V
Number of Phases		3		Current	Full Load	11.0 A	13.8 A	27.6 A
Insulation Class		F			Locked-rotor**	680 %	680 %	680 %
Temp. Rise at full load (by resistance method)			Efficiency					
	at 1.0 S.F	80 deg. C			50% Load	88.0 %		
Motor Location		☐ Indoor ☐ Outdoor			75% Load	90.0 %		
Altitude		Less than 1,000 meter			100% Load	91.0 %		
Relative Humidity		Less than 80 %		Power Factor(p.u)				
Ambient Temp.		40 deg. C (Max.)			50% Load	0.600		
Duty Type		Continuous (S1)			75% Load	0.700		
Service Factor		1.15			100% Load	0.750		
Mounting		B35		Speed at Full Load		1175 r.p.m		
Bearing	Type	Anti-Friction		Torque				
	DE/N-DE	6310ZC3 / 6309ZC3			Full Load	44.97 lb.ft		
	Lubricant	Grease(Polyrex-EM)			Locked-rotor**	170 %		
External Thrust		Not applicable			Breakdown**	250 %		
Coupling Method		☒ Direct ☐ V-belt		Moment of Inertia (J)				
Shaft Extension		Single			Load(Max.)	173.035 lb.ft2		
Terminal Box	Main	Cast Iron			Motor	3.086 lb.ft2		
	Aux.	No		Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing				64 dB(A)		
Application				Vibration		3.8 mm/s (peak)		
Area classification		Hazardous		Permissible number of consecutive starts		Cold	3 times	
Type of Ex-Protection		Class I&II, Division 2				Hot	2 times	
Applicable Standard		NEMA MG1, CSA C390		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		

ACCESSORIES	SUBMITTAL DRAWING
	Outline Dimension Drawing \ Motor Weight(Approx.)
	B35 LM-T2256C4JLV25 310 lb.


REMARK
1. Premium efficiency according to NEMA MG1 2. Inverter Duty @ 1.0 Service Factor & F Temperature rise -. 10:1 VT (20:1 VT at 50% load) -. 10:1 CT (1 hour duty, 4:1 continuous) -. CHP up to 1.5 times base speed, NEMA MG1 Part31 3. CSA Certification -. Class I, Division 2, Group A, B, C & D -. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.) 4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power. 5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous. 6. Temp. code : T3C(160°C) at sine wave
Date DSND CHKD CHKD APPD
2025-09-19 S.H. LEE I.K. KIM R.G. KIM S.W. KIM

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be done according to maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.
 ** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.


		2	3	4		
REV	DATE	CONTENTS		REVD BY	CHKD BY	CHKD BY

MAIN NAMEPLATE

4.72

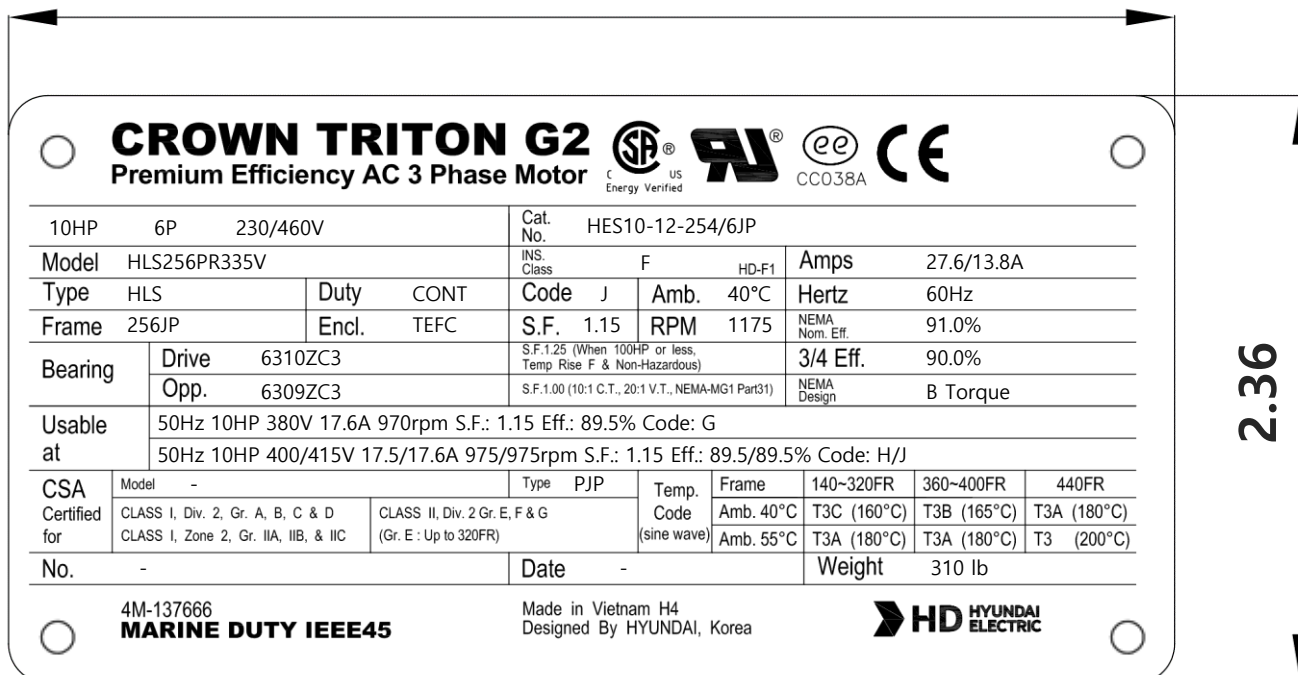

WIRING DIAGRAM

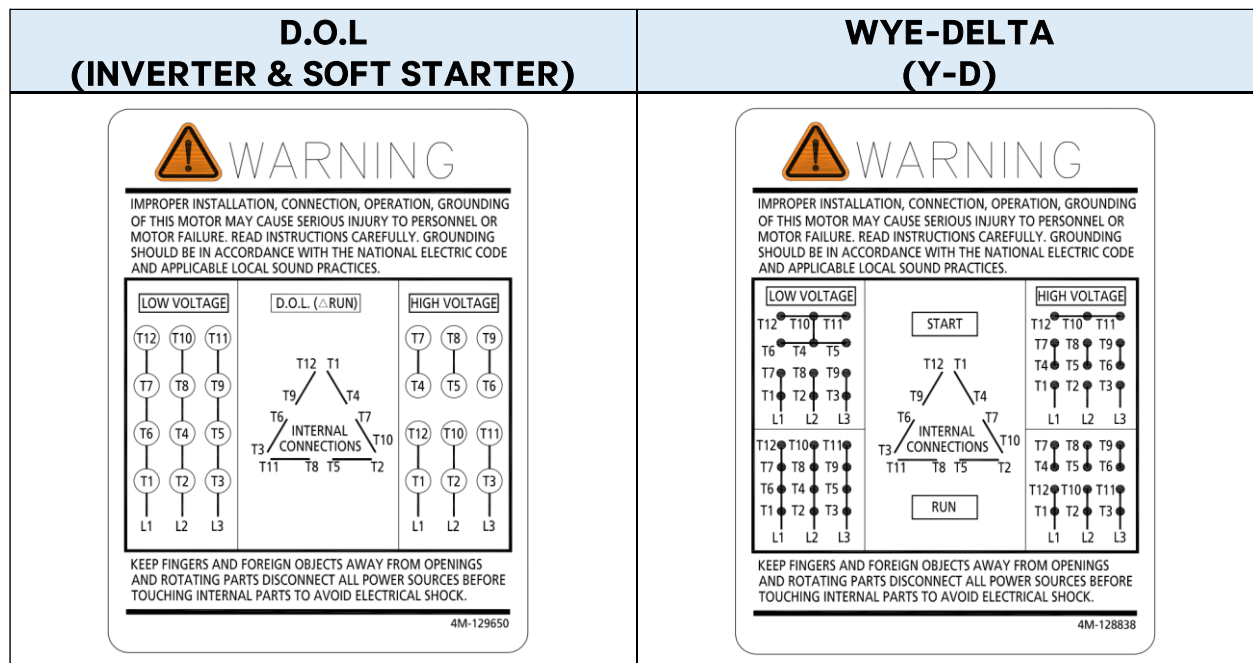


APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HES, JM/JP, 254-326)	DWG SIZE	
CHKD BY	I.K.KIM	SCALE	NONE			A4 (1:1)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle			TITLE NAMEPLATE DRAWING	
DSND BY	S.H.LEE	DATE	2024.06.07				
				REF. NO	4M-137666 / 4M-129650	Sheet No.	of
				DWG NO	NP-HES10-12-254/6JP	Revision No.	0


Type :	PJP	
Full Load Torque :	44.97	lb.ft
Load moment of Inertia (J) :	173.035	lb.ft2
Motor moment of Inertia (J) :	3.086	lb.ft2

7.5kW	10HP	6 P	60 Hz
Speed at Full Load :			1175 RPM
Rated Voltage	575V	460V	230V
Full Load Current	11.0A	13.8A	27.6A

SPEED VS TORQUE & CURRENT CURVE



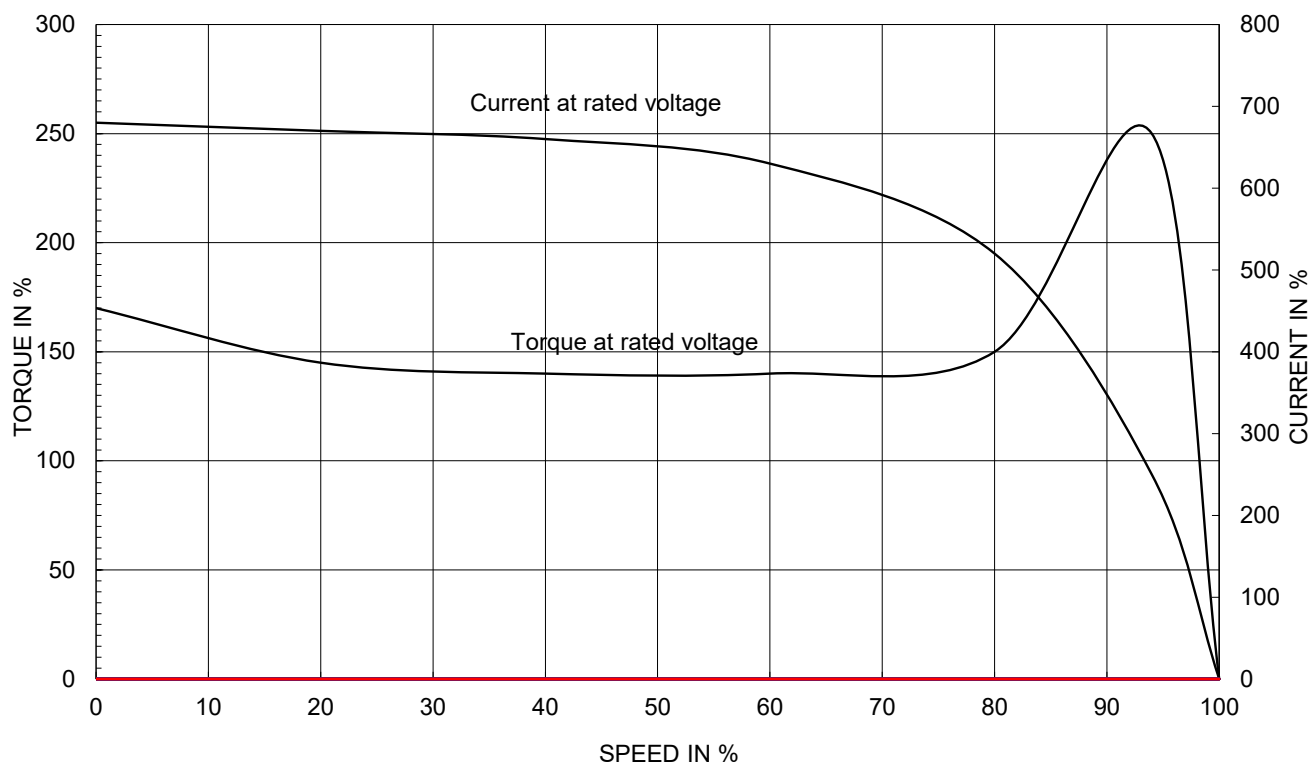


OUTPUT VS EFF., P.F & CURRENT CURVE

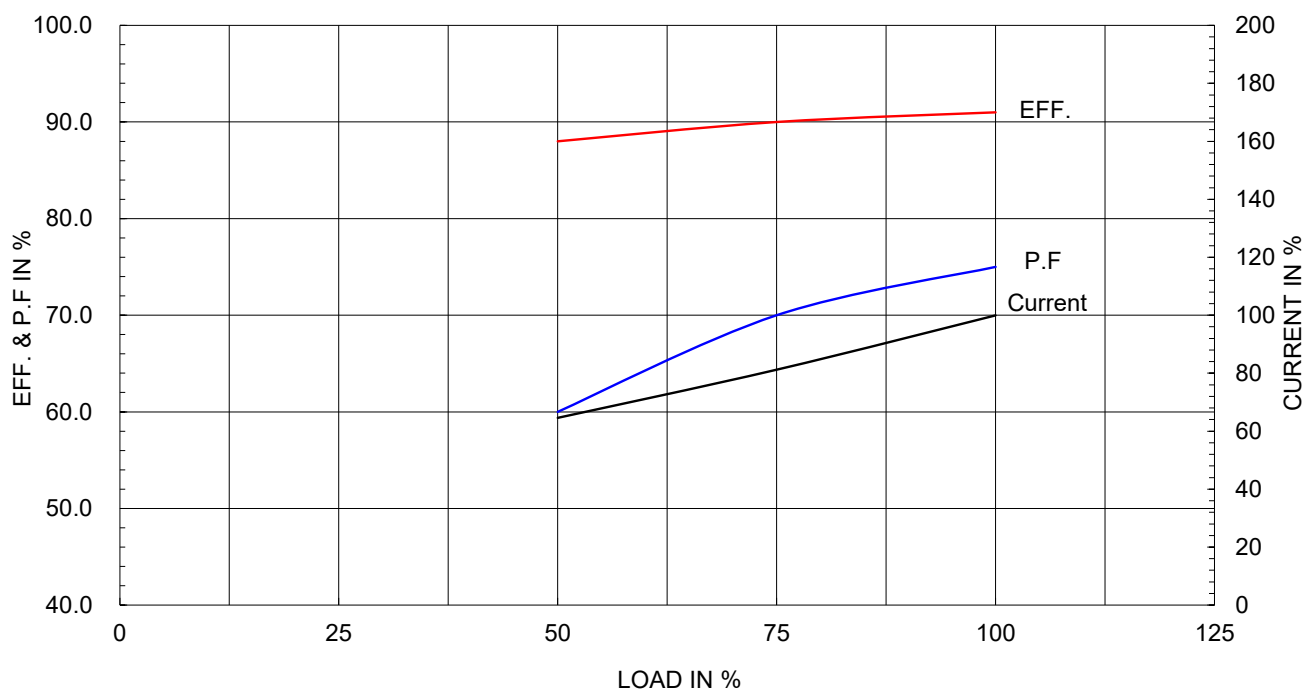

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

		2	3	4		
REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

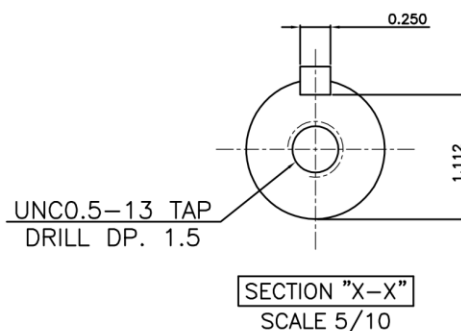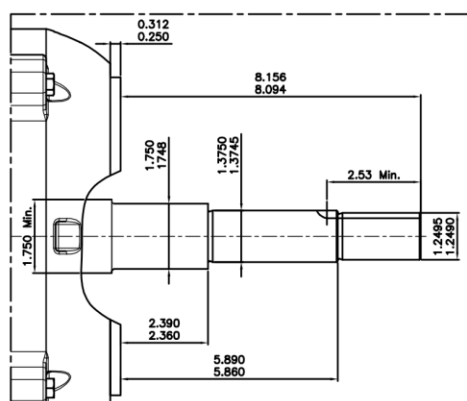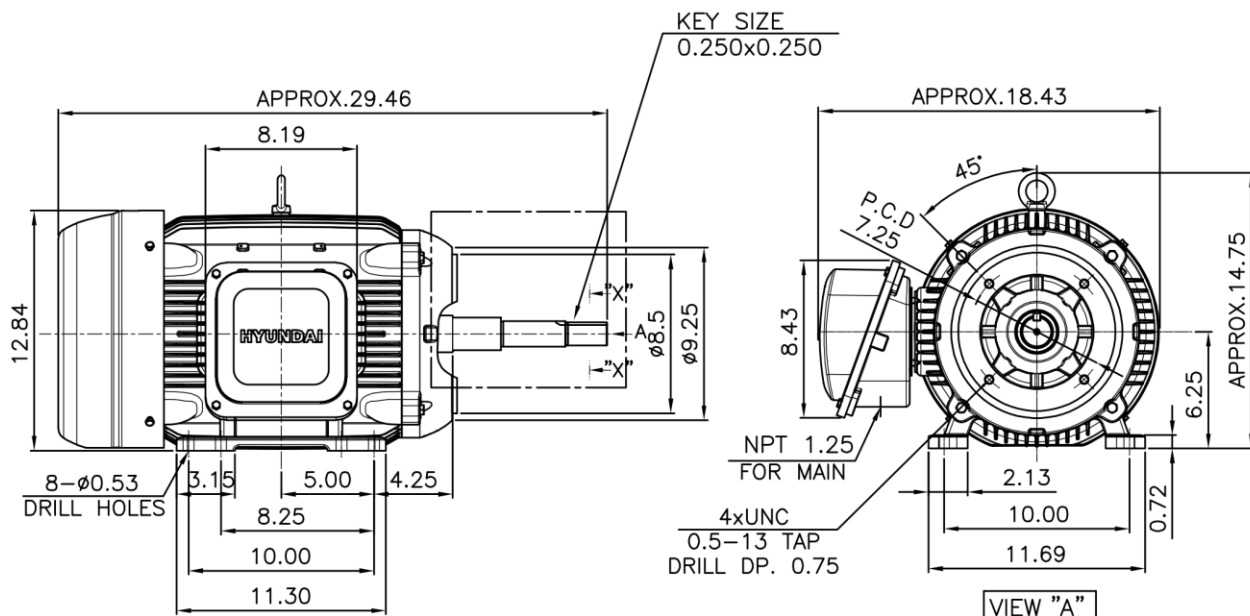


[TOLERANCE]

1. CENTER HEIGHT : +0.00inch - 0.03inch
-
2. SHAFT DIAMETER : +0.000inch - 0.001inch
-
3. KEYWAY DEPTH : +0.000inch - 0.015inch

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	NEMA 254/6TC (JP) (Dual hole)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	1/10			A4 (1:10)
CHKD BY		PROJEC'N	3rd Angle	TITLE OUTLINE		
DSND BY	S.H.LEE	DATE	2025.01.17			
				REF. NO		Sheet No. of
				DWG NO	LM-T2256C4JLV25	Revision No. 1

Cls. I&II, Div. 2

IEEE 841

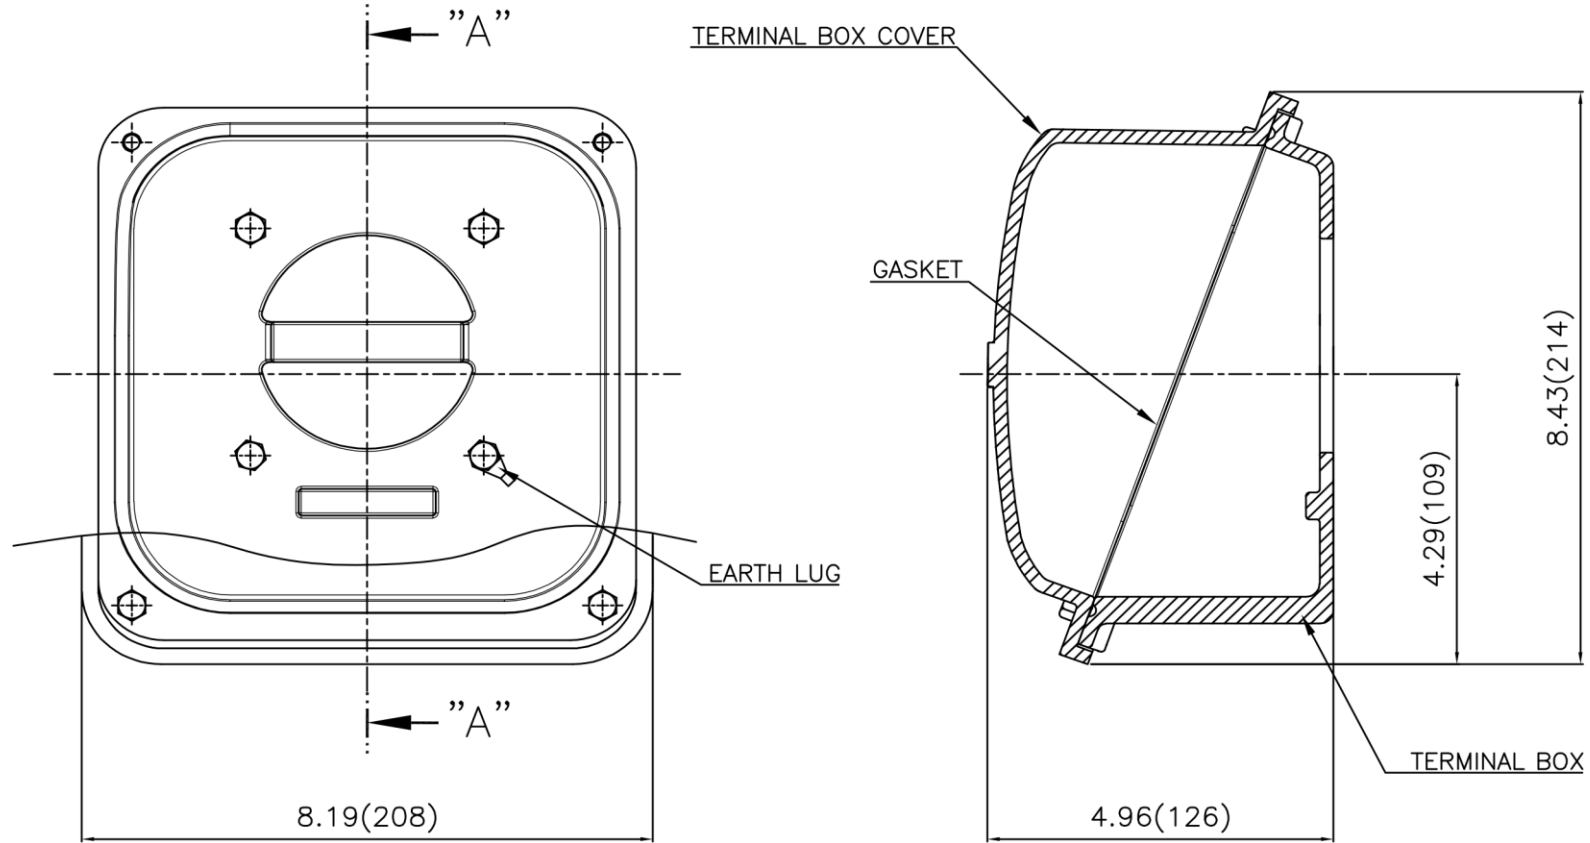

SEC. "A"-"A"

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						

일반가공공차		일반계관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 250-280 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/2	TITLE	TERMINAL BOX ASS'Y	A3 (1:2)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬의	DATE	2023-10-19	DWG NO	3M-248458	Revision No.	0

