

Customer :

Project Name :

Project No. :

Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

www.hd-hyundaielectric.com

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HES10-36-213/5JM		Item No.			Rev. No.	[]	
Project Name			Project No.			Quantity	sets	
GENERAL SPECIFICATION				PERFORMANCE DATA				
Frame Size	215JM		Rated Output	7.5 kW		10 HP		
Type	PJP		Number of Poles	2				
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage				
Method of Cooling	IC411(FC)		Starting Method*	D.O.L				
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V		
Number of Phases	3		Current	Full Load	9.71 A	12.1 A	24.3 A	
Insulation Class	F			Locked-rotor**	680 %	680 %	680 %	
Temp. Rise at full load (by resistance method)			Efficiency					
at 1.0 S.F			80 deg. C					
Motor Location	☐ Indoor ☐ Outdoor		50% Load		87.2 %			
Altitude	Less than 1,000 meter		75% Load		89.2 %			
Relative Humidity	Less than 80 %		100% Load		90.2 %			
Ambient Temp.	40 deg. C (Max.)		Power Factor(p.u)					
Duty Type	Continuous (S1)		50% Load		0.710			
Service Factor	1.15		75% Load		0.810			
Mounting	B35		100% Load		0.860			
Bearing	Type	Anti-Friction	Speed at Full Load		3525 r.p.m			
	DE/N-DE	6309ZZC3 / 6208ZZC3	Torque					
	Lubricant	Grease(Polyrex-EM)	Full Load		14.99 lb.ft			
External Thrust	Not applicable		Locked-rotor**		160 %			
Coupling Method	☒ Direct ☐ V-belt		Breakdown**		260 %			
Shaft Extension	Single		Moment of Inertia (J)					
Terminal	Main	Cast Iron	Load(Max.)		11.159 lb.ft2			
Box	Aux.	No	Motor		0.451 lb.ft2			
	Location	Refer to Outline Drawing	Sound Pressure Level (No-load & mean value at 1m from motor)					
Application			73 dB(A)					
Area classification	Hazardous		Vibration		3.8 mm/s (peak)			
Type of Ex-Protection	Class I&II, Division 2		Permissible number of consecutive starts		Cold	3 times		
Applicable Standard	NEMA MG1, CSA C390		Hot		2 times			
			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)			
ACCESSORIES			SUBMITTAL DRAWING					
			Outline Dimension Drawing \ Motor Weight(Approx.)					
			B35		LM-T2215C4MLV25		190 lb.	
SPARE PARTS			REMARK					
			1. Premium efficiency according to NEMA MG1					
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise					
			-. 10:1 VT (20:1 VT at 50% load)					
			-. 10:1 CT					
			-. CHP up to 1.5 times base speed, NEMA MG1 Part31					
			3. CSA Certification					
			-. Class I, Division 2, Group A, B, C & D					
			-. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)					
			4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.					
			5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.					
			6. Temp. code : T3C(160°C) at sine wave					
			Date	DSND	CHKD	CHKD	APPD	
			2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM	

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.




1		2	3	4			5
REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY	

MAIN NAMEPLATE

3.94

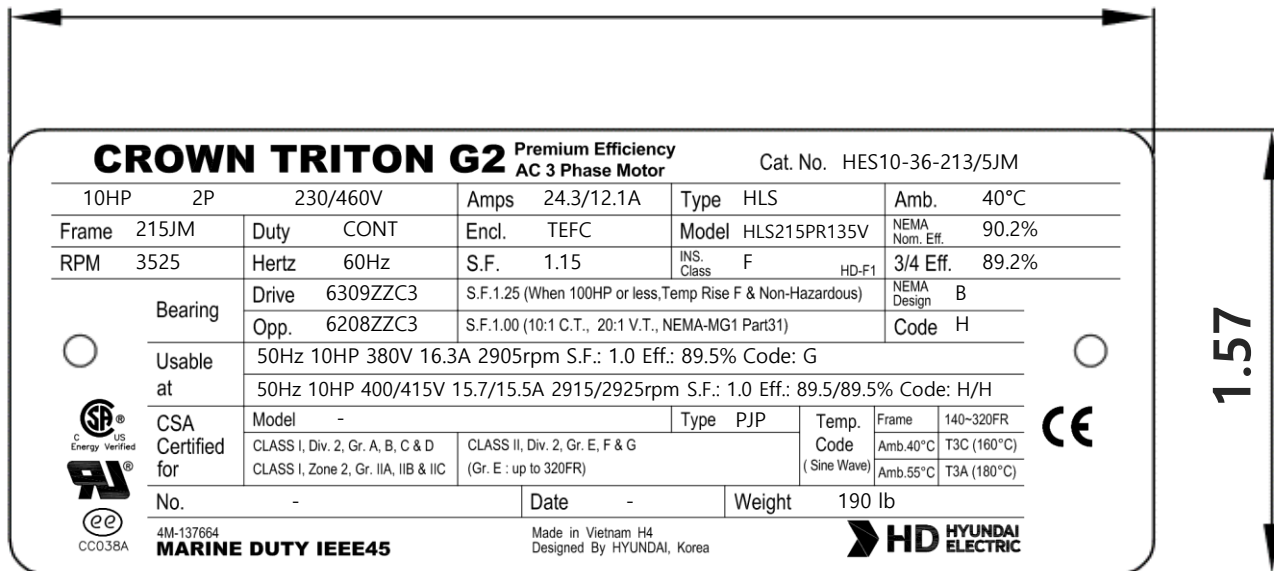

■ WIRING DIAGRAM

D.O.L (INVERTER & SOFT STARTER)	WYE-DELTA (Y-D)
 WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. LOW VOLTAGE  INTERNAL CONNECTIONS  HIGH VOLTAGE  KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128845	N/A

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HES, JM/JP, 143-215)	DWG SIZE	
CHKD BY	I.K.KIM	SCALE	NONE			A4 (1:1)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle				
DSND BY	S.H.LEE	DATE	2024.06.07				
 HD HYUNDAI ELECTRIC				TITLE			
				NAMEPLATE DRAWING			
				REF. NO	4M-137664 / 4M-128845	Sheet No.	of
				DWG NO	NP-HES10-36-213/5JM	Revision No.	0

Type : PJP

7.5kW 10HP 2 P 60 Hz

Full Load Torque : 14.99 lb.ft

Speed at Full Load : 3525 RPM


Load moment of Inertia (J) : 11.159 lb.ft²

Rated Voltage	575V	460V	230V
---------------	------	------	------


Motor moment of Inertia (J) : 0.451 lb.ft²


Full Load Current	9.71A	12.1A	24.3A
-------------------	-------	-------	-------

SPEED VS TORQUE & CURRENT CURVE


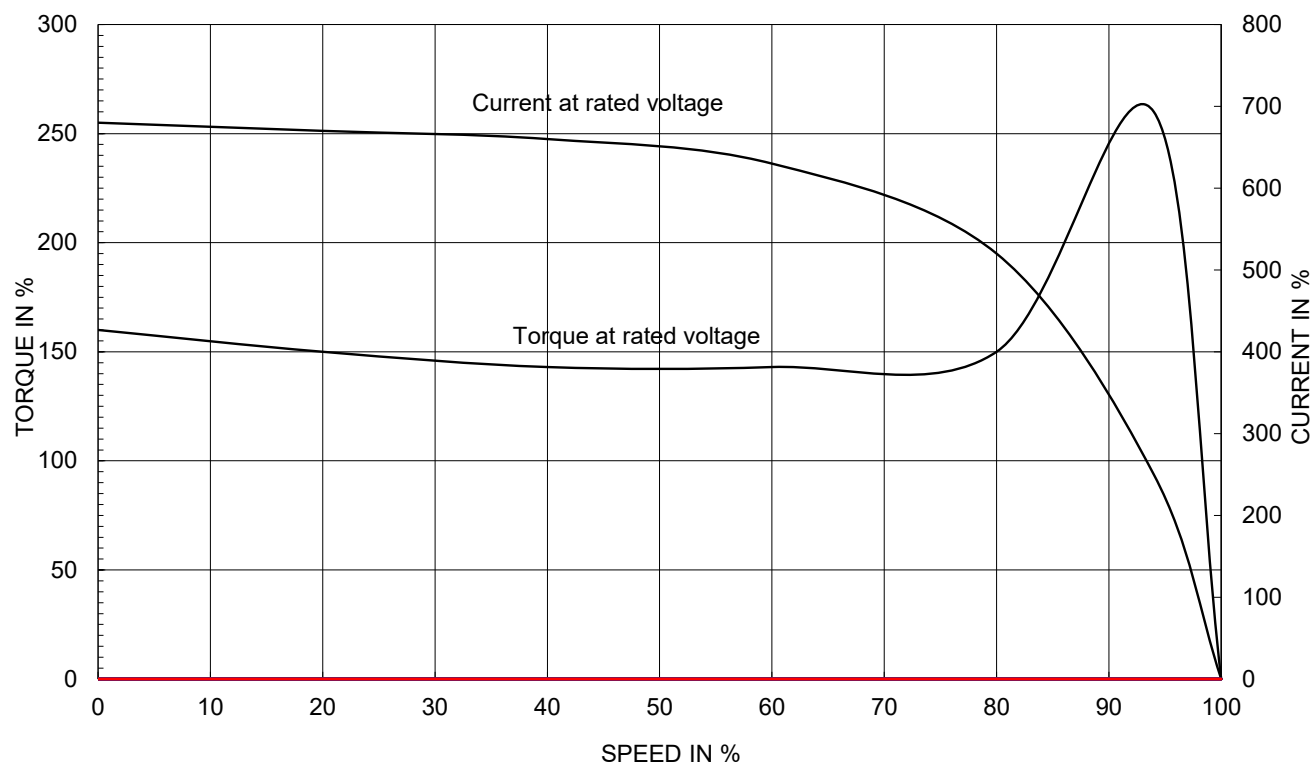


OUTPUT VS EFF., P.F & CURRENT CURVE

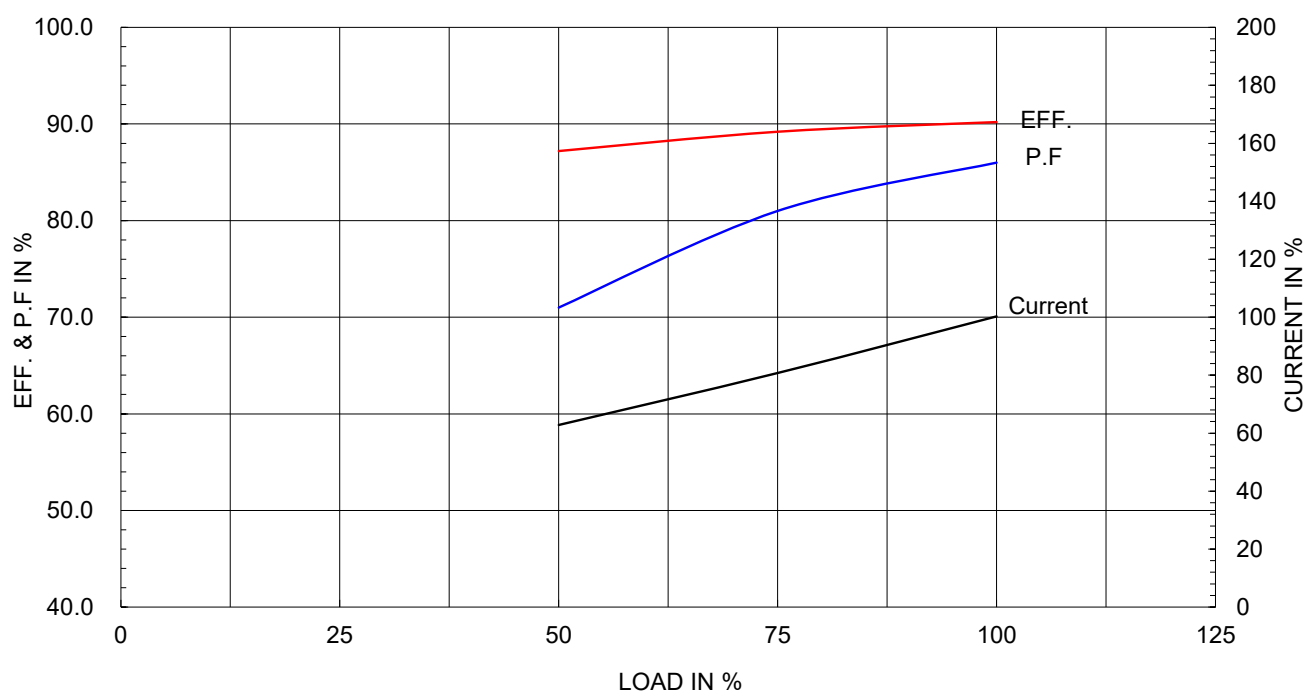

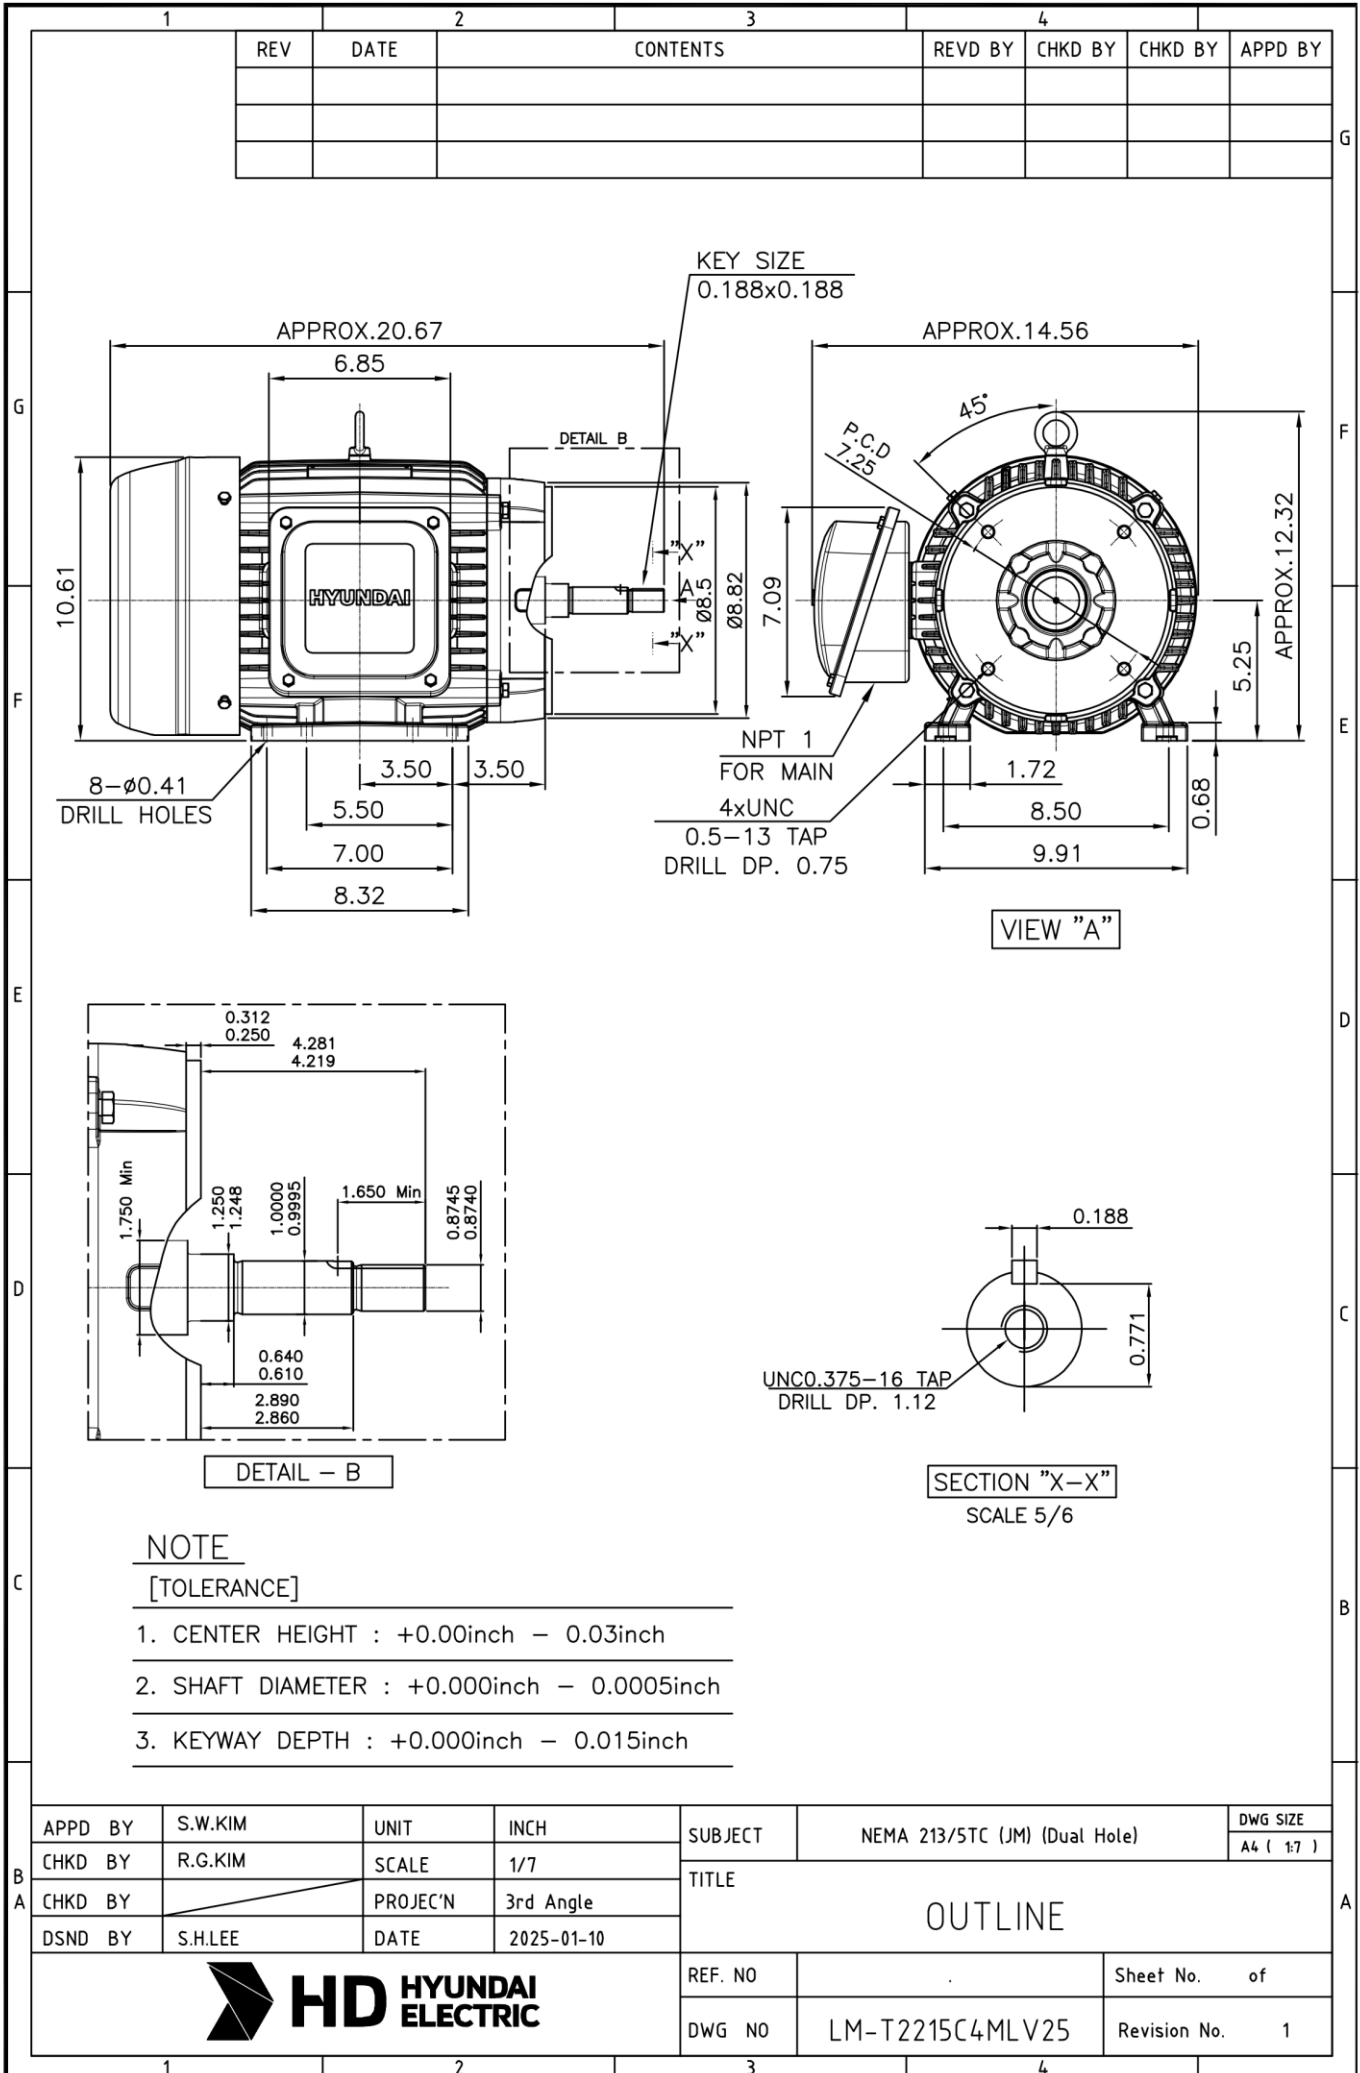

Cls. I&II, Div. 2
IEEE 841

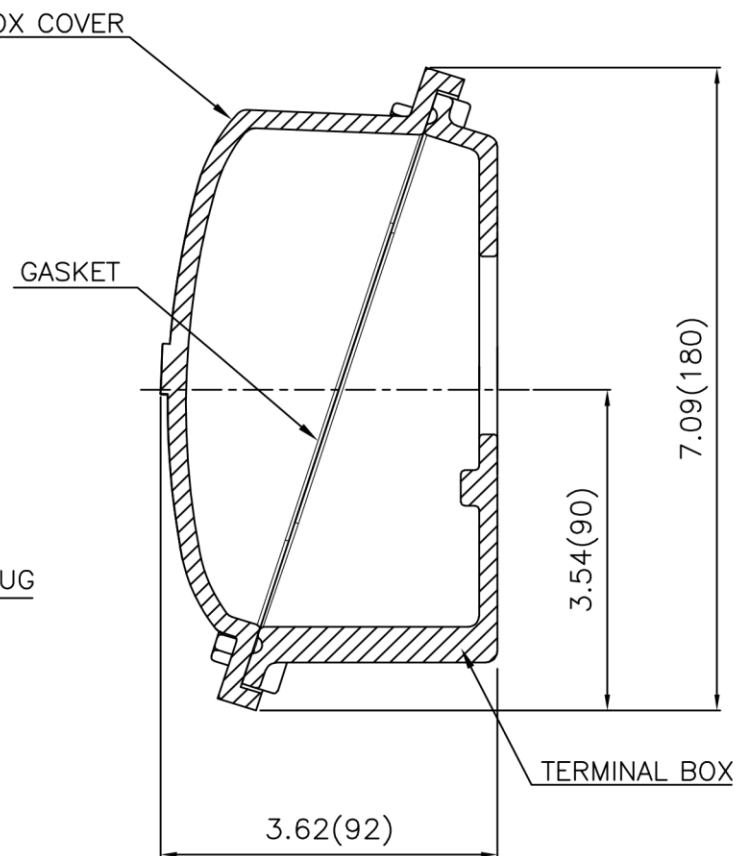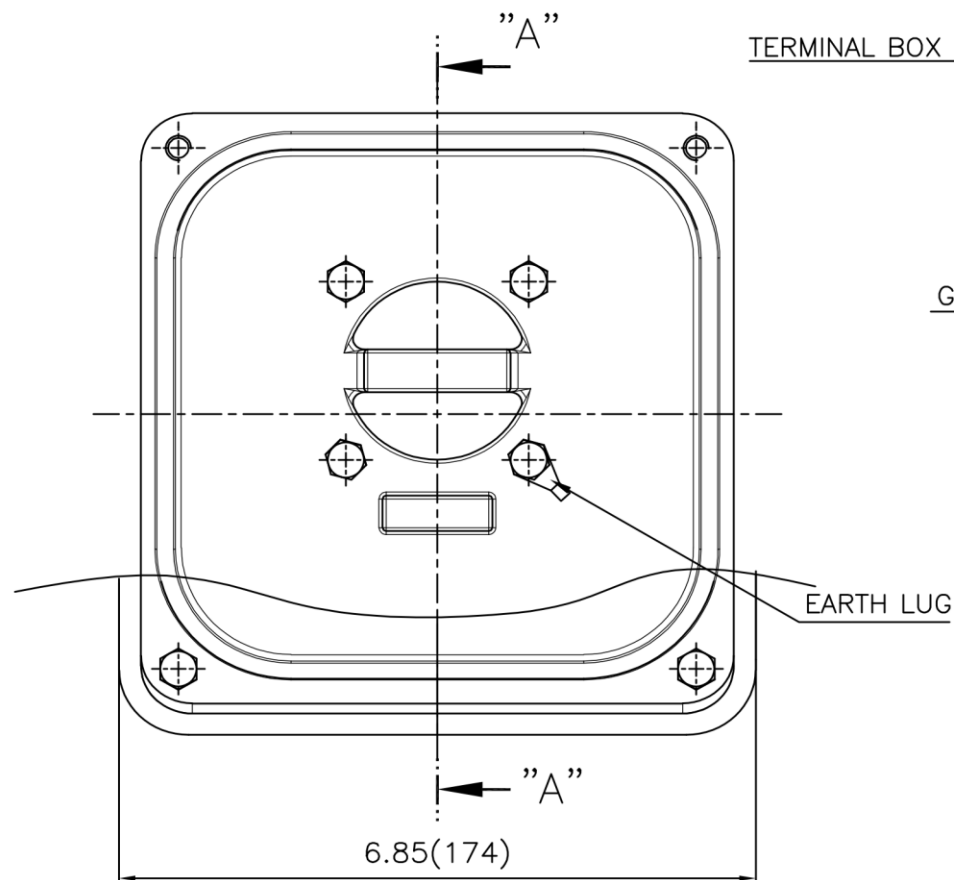

SEC. "A"—"A"

A		50S
		12.5S
		3.2S
		0.4S

[illegible]

Q'TY		DESCRIPTION		MATERIAL	DIMENSION		WEIGHT	PART NO.	REMARK	NO.
APPD	BY	S.Y.KIM		UNIT	inch(mm)		SUBJECT	FR. 210 (CAST IRON)		DWG SIZE
CHKD	BY			SCALE	1/1.5		TITLE			A3 (1:1.5)
CHKD	BY	R.G.KIM		PROJEC'N	3rd Angle			TERMINAL BOX ASS'Y		
DSND	BY	네솔의		DATE	2023-10-19					
 HD HYUNDAI ELECTRIC							REF. NO			Sheet No. of
							DWG NO	3M-248457		Revision No. 0
6		7		8		9				