


Customer :

Project Name :

Project No. :

Revision No. :

SPECIFICATION for INDUCTION MOTOR

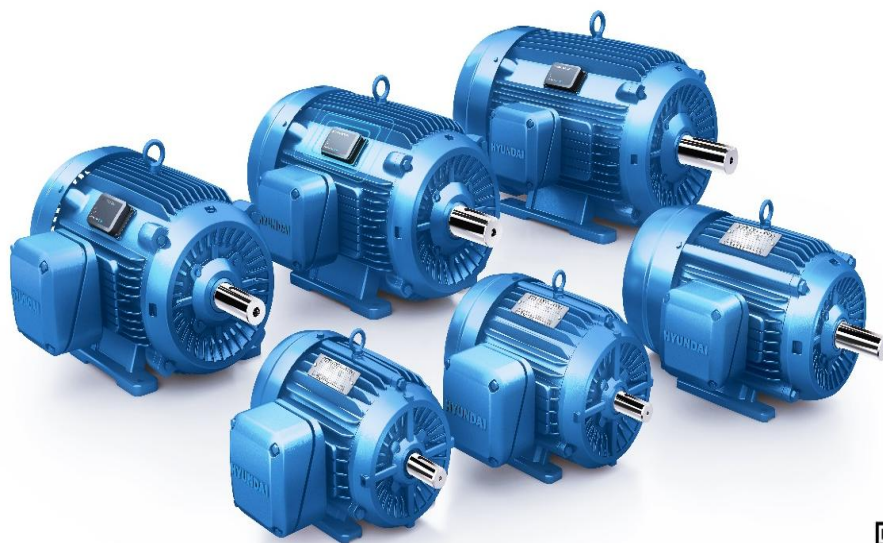

0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

www.hd-hyundaielectric.com

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HES5-12-213/5JM		Item No.			Rev. No.	[]	
Project Name			Project No.			Quantity	sets	
GENERAL SPECIFICATION				PERFORMANCE DATA				
Frame Size	215JM		Rated Output	3.7 kW		5 HP		
Type	PJP		Number of Poles	6				
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage				
Method of Cooling	IC411(FC)		Starting Method*	D.O.L				
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V		
Number of Phases	3		Current	Full Load	6.10 A	7.63 A	15.3 A	
Insulation Class	F			Locked-rotor**	680 %	680 %	680 %	
Temp. Rise at full load (by resistance method)			Efficiency					
	at 1.0 S.F	80 deg. C	50% Load 86.5 %					
Motor Location	☐ Indoor ☐ Outdoor		75% Load 88.5 %					
Altitude	Less than 1,000 meter		100% Load 89.5 %					
Relative Humidity	Less than 80 %		Power Factor(p.u)					
Ambient Temp.	40 deg. C (Max.)		50% Load 0.530					
Duty Type	Continuous (S1)		75% Load 0.630					
Service Factor	1.15		100% Load 0.680					
Mounting	B35		Speed at Full Load		1180 r.p.m			
Bearing	Type	Anti-Friction	Torque					
	DE/N-DE	6309ZZC3 / 6208ZZC3	Full Load 22.09 lb.ft					
	Lubricant	Grease(Polyrex-EM)	Locked-rotor** 170 %					
External Thrust	Not applicable		Breakdown** 220 %					
Coupling Method	☒ Direct ☐ V-belt		Moment of Inertia (J)					
Shaft Extension	Single		Load(Max.) 96.700 lb.ft2					
Terminal Box	Main	Cast Iron	Motor 1.234 lb.ft2					
	Aux.	No	Sound Pressure Level (No-load & mean value at 1m from motor)					
	Location	Refer to Outline Drawing	57 dB(A)					
Application			Vibration 3.8 mm/s (peak)					
Area classification	Hazardous		Permissible number of Cold 3 times					
Type of Ex-Protection	Class I&II, Division 2		consecutive starts Hot 2 times					
Applicable Standard	NEMA MG1, CSA C390		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)			
ACCESSORIES			SUBMITTAL DRAWING					
			Outline Dimension Drawing \ Motor Weight(Approx.)					
			B35		LM-T2215C4MLV25		190 lb.	
SPARE PARTS			REMARK					
			1. Premium efficiency according to NEMA MG1					
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise					
			-. 10:1 VT (20:1 VT at 50% load)					
			-. 10:1 CT					
			-. CHP up to 1.5 times base speed, NEMA MG1 Part31					
			3. CSA Certification					
			-. Class I, Division 2, Group A, B, C & D					
			-. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)					
			4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.					
			5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.					
			6. Temp. code : T3C(160°C) at sine wave					
			Date	DSND	CHKD	CHKD	APPD	
			2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM	

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.




2		3		4		5
REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

MAIN NAMEPLATE

3.94

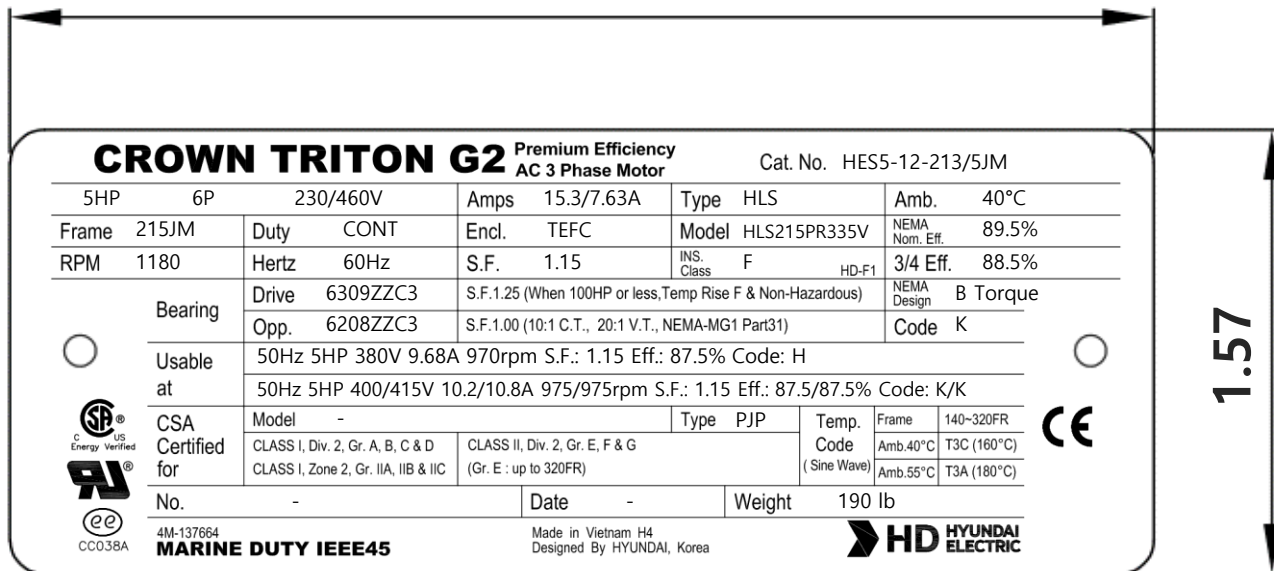

■ WIRING DIAGRAM

D.O.L (INVERTER & SOFT STARTER)	WYE-DELTA (Y-D)
 WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. LOW VOLTAGE  INTERNAL CONNECTIONS  HIGH VOLTAGE  KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128845	N/A

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HES, JM/JP, 143-215)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	NONE			A4 (1:1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	TITLE	NAMEPLATE DRAWING	
DSND BY	S.H.LEE	DATE	2024.06.07			
				REF. NO	4M-137664 / 4M-128845	Sheet No. of
				DWG NO	NP-HES5-12-213/5JM	Revision No. 0

Type : PJP

3.7kW 5HP 6 P 60 Hz

Full Load Torque : 22.09 lb.ft

Speed at Full Load : 1180 RPM


Load moment of Inertia (J) : 96.700 lb.ft²

Rated Voltage	575V	460V	230V
---------------	------	------	------


Motor moment of Inertia (J) : 1.234 lb.ft²


Full Load Current	6.10A	7.63A	15.3A
-------------------	-------	-------	-------

SPEED VS TORQUE & CURRENT CURVE

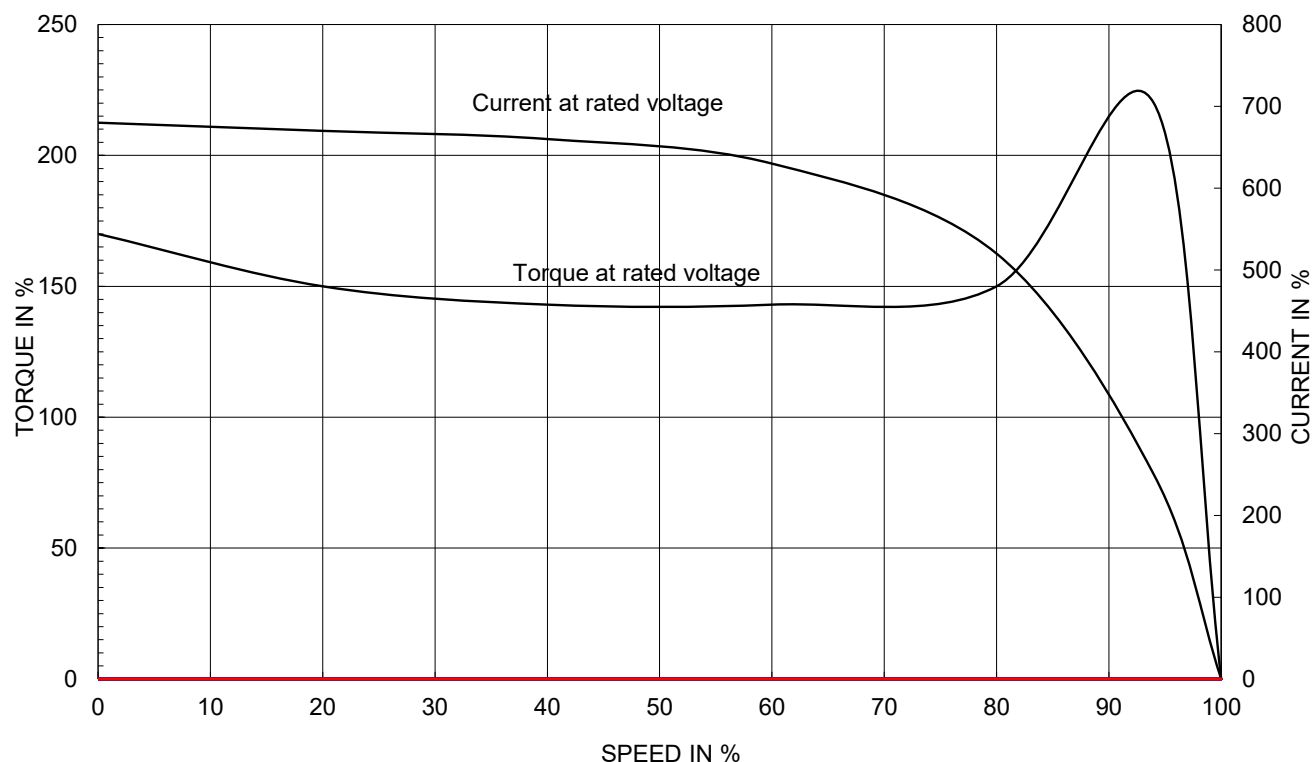


OUTPUT VS EFF., P.F & CURRENT CURVE

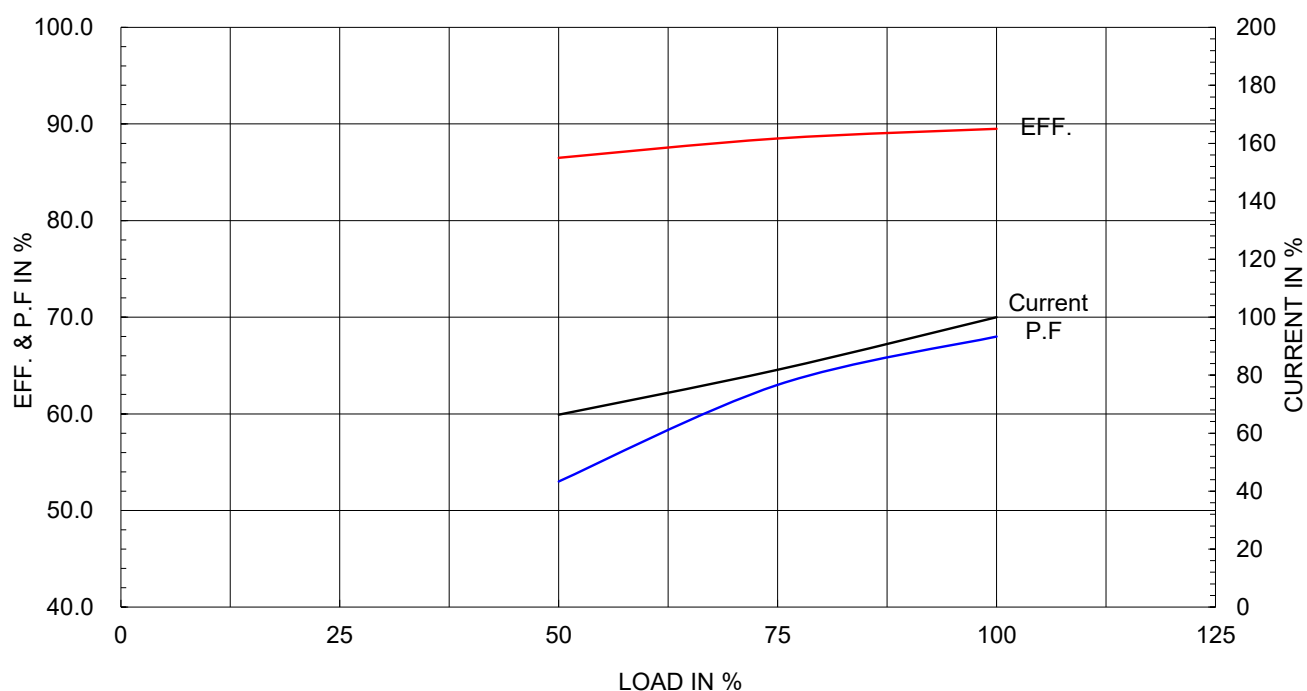

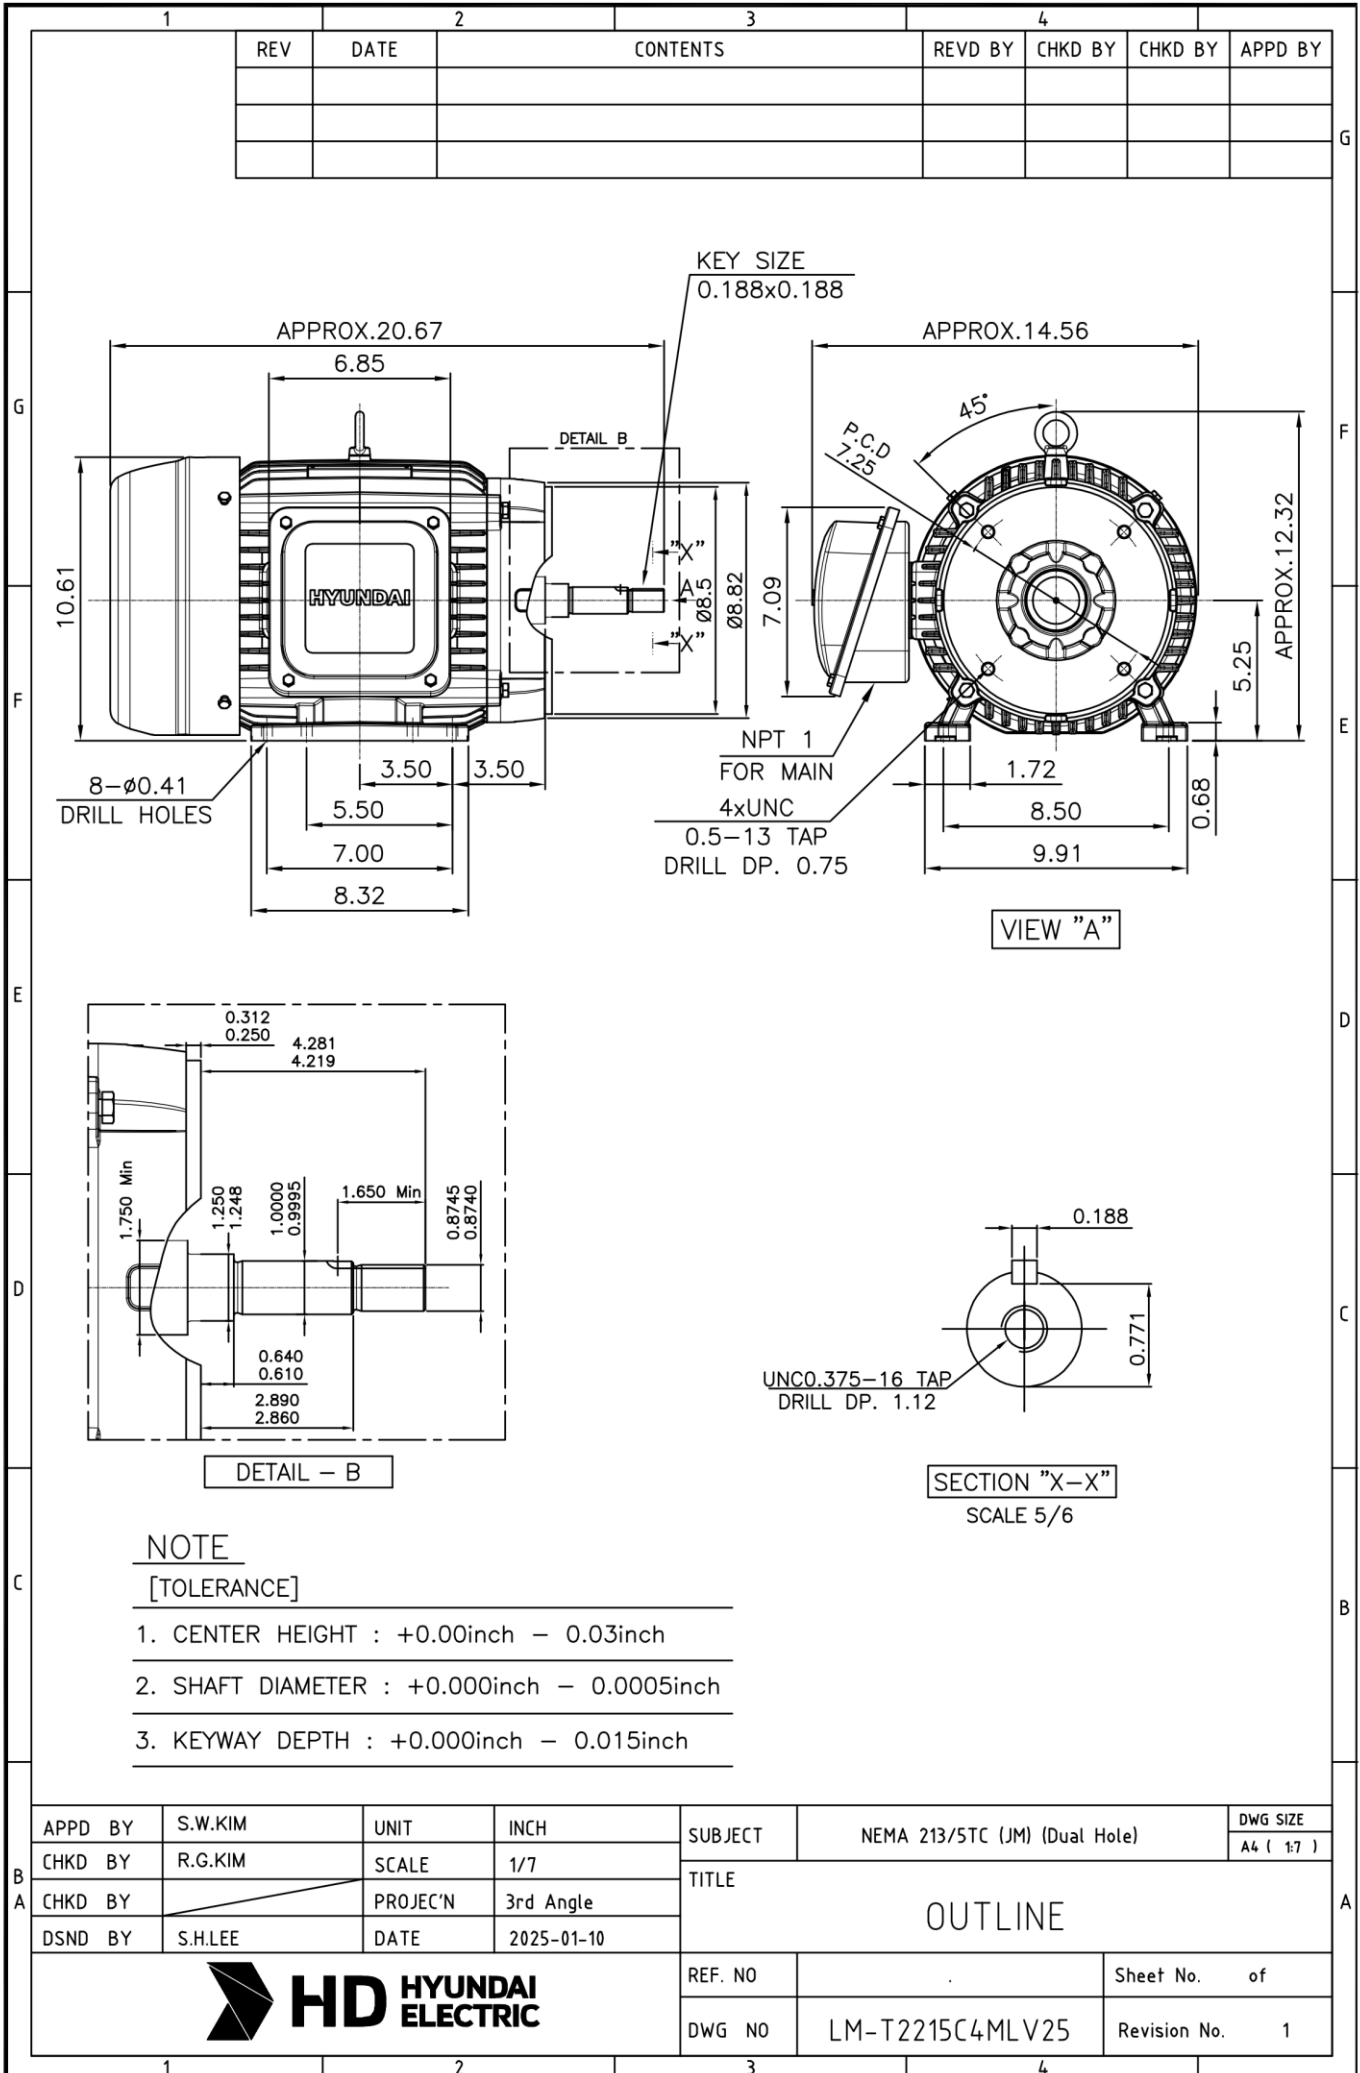

Cls. I&II, Div. 2

IEEE 841

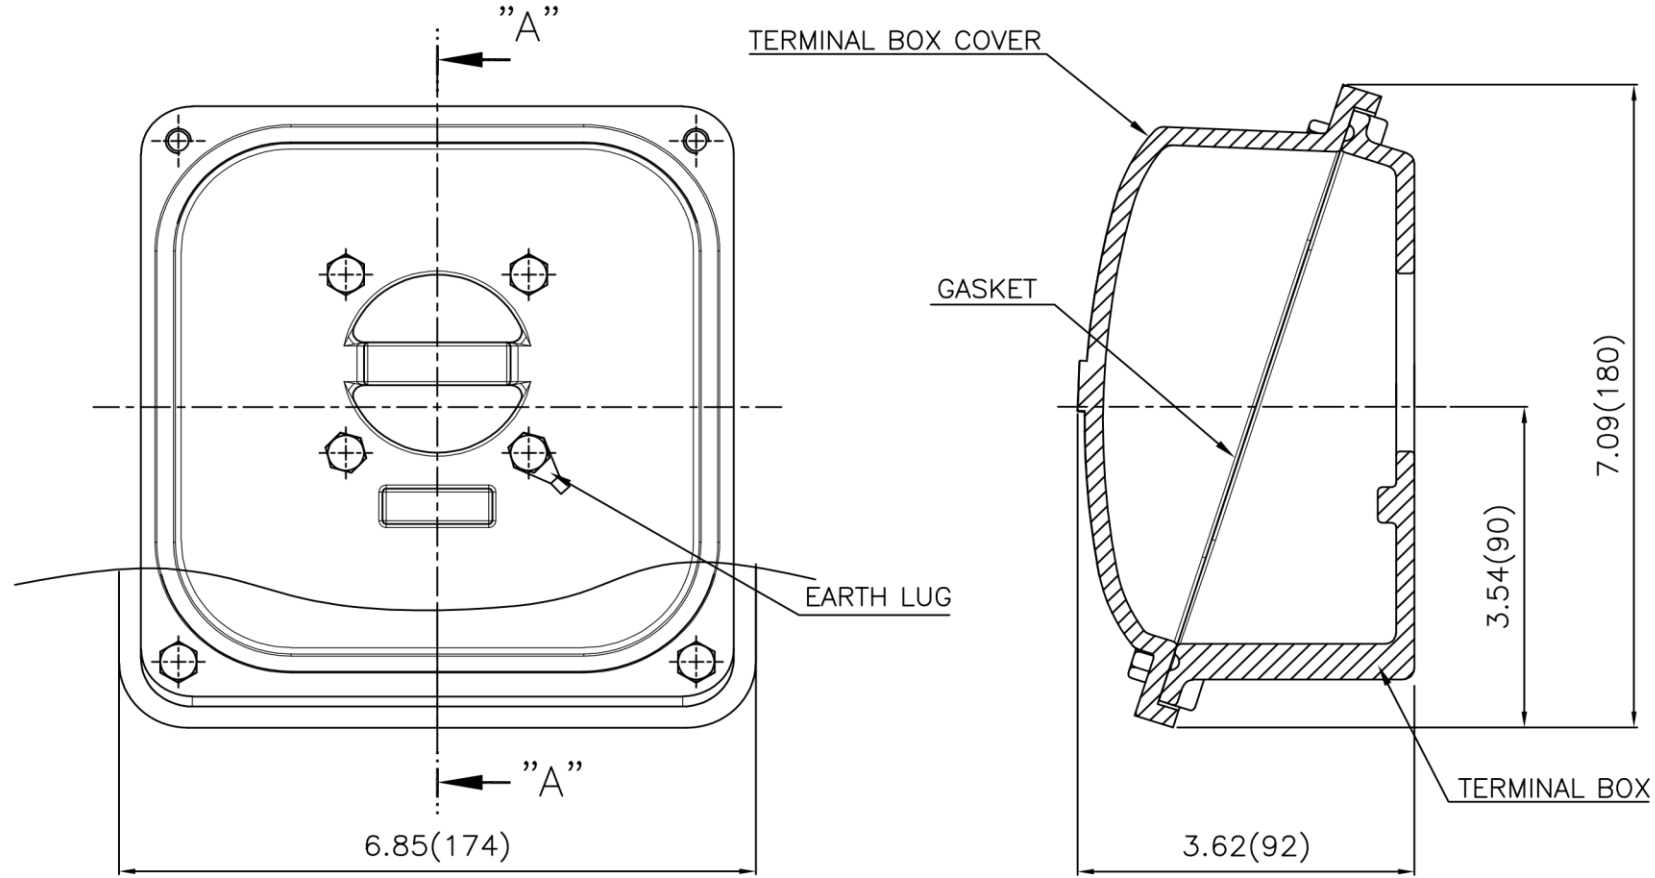

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY

일반가공공차		일반계관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 210 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/1.5	TITLE	TERMINAL BOX ASS'Y	A3 (1:1.5)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬의	DATE	2023-10-19	DWG NO	3M-248457	Revision No.	0

