

Customer :

Project Name :

Project No. :

Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

www.hd-hyundaielectric.com



AC INDUCTION MOTOR DATA SHEET

Catalog No.	HES5-18-182/4JP	Item No.		Rev. No.	[]
Project Name		Project No.		Quantity	sets
GENERAL SPECIFICATION			PERFORMANCE DATA		
Frame Size	184JP	Rated Output	3.7 kW	5 HP	
Type	PJP	Number of Poles	4		
Enclosure(Protection)	Totally Enclosed / IP55	Rotor Type	Squirrel Cage		
Method of Cooling	IC411(FC)	Starting Method*	D.O.L		
Rated Frequency	60 Hz	Rated Voltage	575 V	460 V	230 V
Number of Phases	3	Current	Full Load	5.19 A	6.49 A
Insulation Class	F		Locked-rotor**	840 %	840 %
Temp. Rise at full load (by resistance method)		Efficiency			
at 1.0 S.F	80 deg. C	50% Load			
Motor Location	☐ Indoor ☐ Outdoor	75% Load			
Altitude	Less than 1,000 meter	100% Load			
Relative Humidity	Less than 80 %	Power Factor(p.u)			
Ambient Temp.	40 deg. C (Max.)	50% Load			
Duty Type	Continuous (S1)	75% Load			
Service Factor	1.15	100% Load			
Mounting	B35	Speed at Full Load			
Bearing	Type	Anti-Friction	Torque		
	DE/N-DE	6207ZZC3 / 6206ZZC3	Full Load		
	Lubricant	Grease(Polyrex-EM)	Locked-rotor**		
External Thrust	Not applicable	Breakdown**			
Coupling Method	☒ Direct ☐ V-belt	Moment of Inertia (J)			
Shaft Extension	Single	Load(Max.)			
Terminal	Main	Motor			
Box	Aux.	Sound Pressure Level (No-load & mean value at 1m from motor)			
	Location	60 dB(A)			
Application		Vibration			
Area classification	Hazardous	3.8 mm/s (peak)			
Type of Ex-Protection	Class I&II, Division 2	Permissible number of			
Applicable Standard	NEMA MG1, CSA C390	consecutive starts			
		Cold 3 times			
		Hot 2 times			
		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)	
ACCESSORIES		SUBMITTAL DRAWING			
		Outline Dimension Drawing \ Motor Weight(Approx.)			
		B35	LM-T2184C4JLV25	125 lb.	
		REMARK			
		1. Premium efficiency according to NEMA MG1			
		2. Inverter Duty @ 1.0 Service Factor & F Temperature rise			
		-. 10:1 VT (20:1 VT at 50% load)			
		-. 10:1 CT			
		-. CHP up to 1.5 times base speed, NEMA MG1 Part31			
		3. CSA Certification			
		-. Class I, Division 2, Group A, B, C & D			
		-. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)			
		4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.			
		5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.			
		6. Temp. code : T3C(160°C) at sine wave			
		Date	DSND	CHKD	CHKD
		2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM
					APPD
					S.W. KIM

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.




		2	3	4			
REV	DATE	CONTENTS		REVD BY	CHKD BY	CHKD BY	APPD BY

■ MAIN NAMEPLATE

3.94

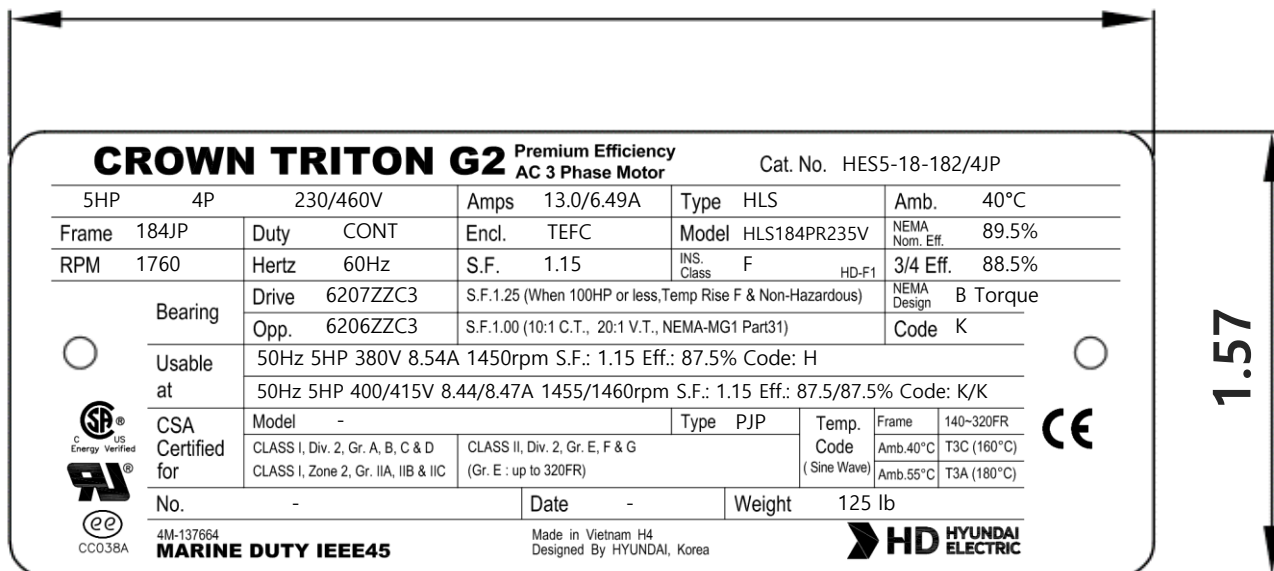

■ WIRING DIAGRAM

D.O.L (INVERTER & SOFT STARTER)	WYE-DELTA (Y-D)
 WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. LOW VOLTAGE  INTERNAL CONNECTIONS  HIGH VOLTAGE  KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128845	N/A

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HES, JM/JP, 143-215)	DWG SIZE	
CHKD BY	I.K.KIM	SCALE	NONE			A4 (1:1)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle			TITLE NAMEPLATE DRAWING	
DSND BY	S.H.LEE	DATE	2024.06.07				
				REF. NO	4M-137664 / 4M-128845	Sheet No.	of
				DWG NO	NP-HES5-18-182/4JP	Revision No.	0

Type : PJP

3.7kW 5HP 4 P 60 Hz

Full Load Torque : 14.81 lb.ft

Speed at Full Load : 1760 RPM


Load moment of Inertia (J) : 35.061 lb.ft2

Rated Voltage	575V	460V	230V
---------------	------	------	------


Motor moment of Inertia (J) : 0.309 lb.ft2




Full Load Current	5.19A	6.49A	13.0A
-------------------	-------	-------	-------

SPEED VS TORQUE & CURRENT CURVE

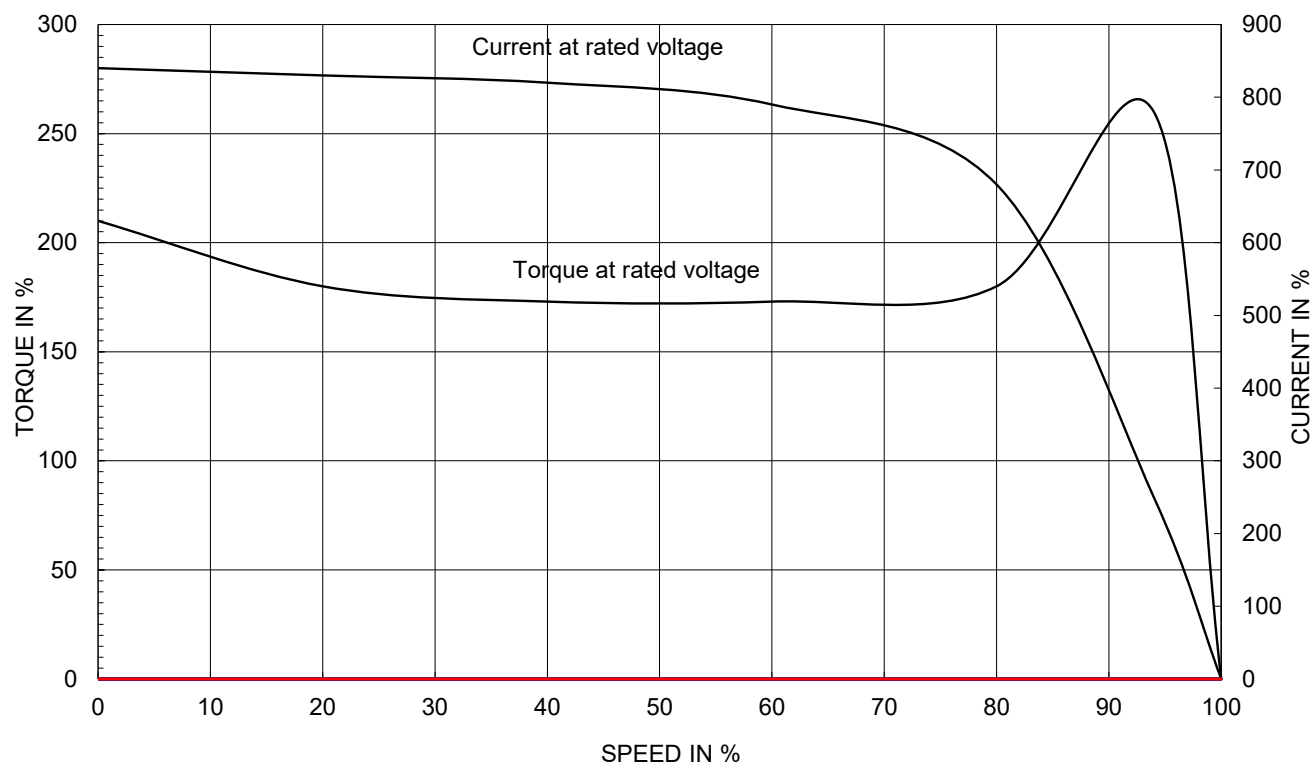

OUTPUT VS EFF., P.F & CURRENT CURVE

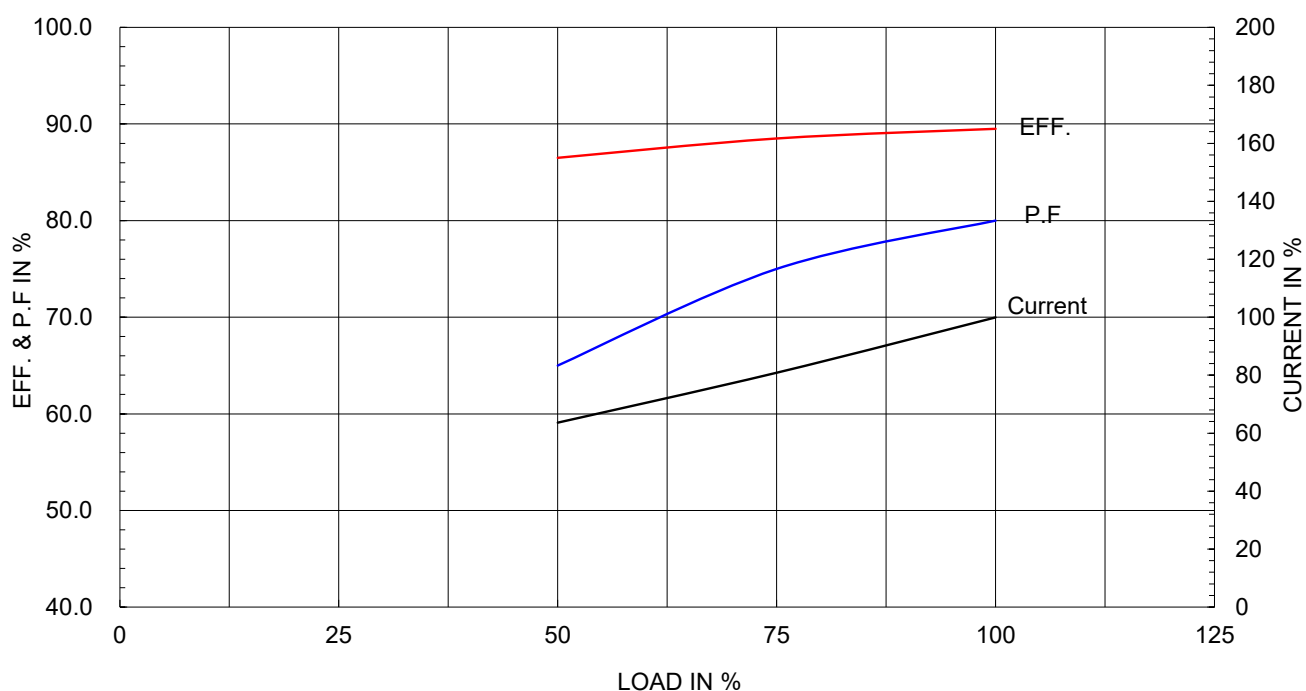

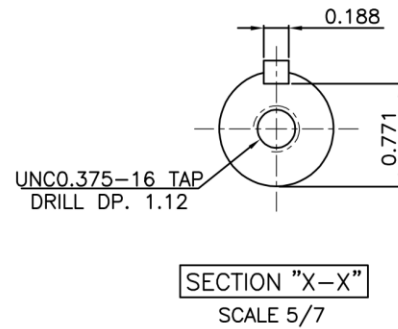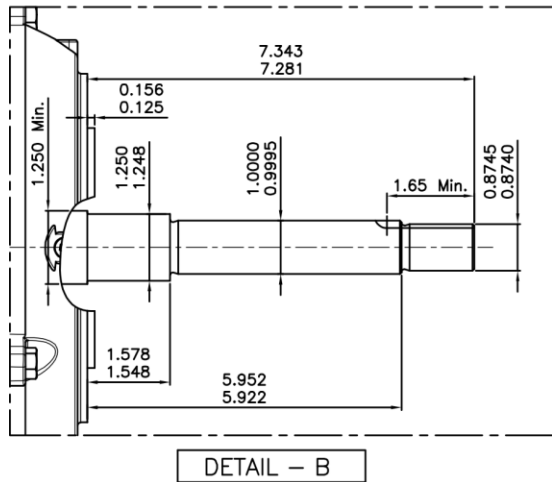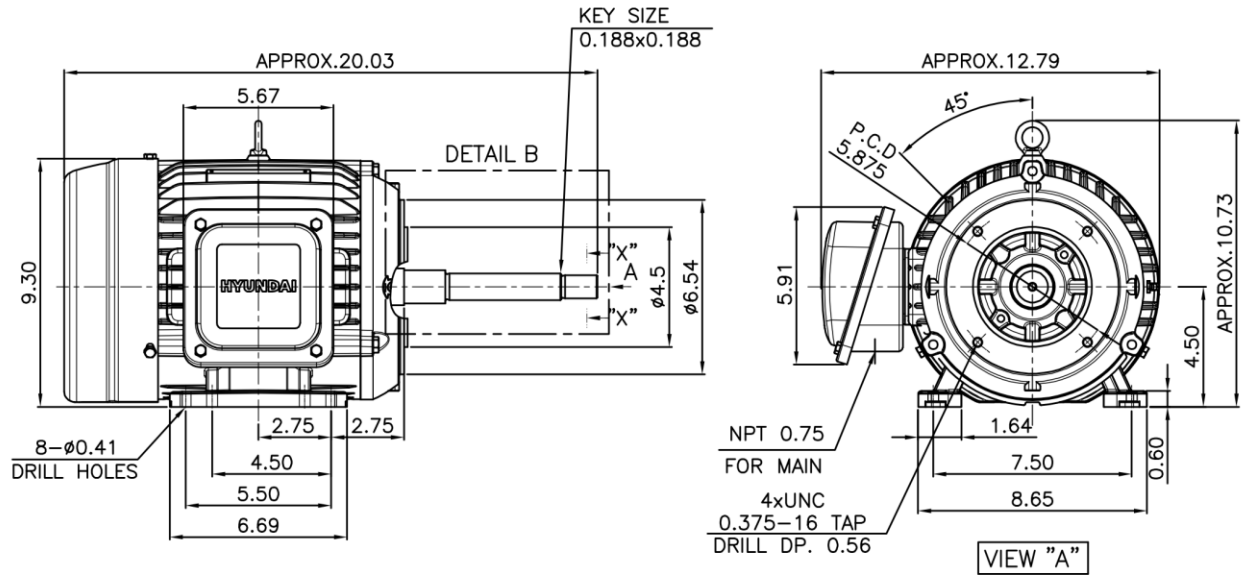


NOTE

[TOLERANCE]

1. CENTER HEIGHT : +0.00inch - 0.03inch
2. SHAFT DIAMETER : +0.000inch - 0.0005inch
3. KEYWAY DEPTH : +0.000inch - 0.015inch

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	NEMA 182/4TC (JP) (Dual hole)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	1/7	TITLE	OUTLINE	A4 (1:7)
CHKD BY		PROJEC'N	3rd Angle			
DSND BY	S.H.LEE	DATE	2025-01-17	REF. NO		Sheet No. of
				DWG NO	LM-T2184C4JLV25	Revision No. 1

Cls. I&II, Div. 2 IEEE 841

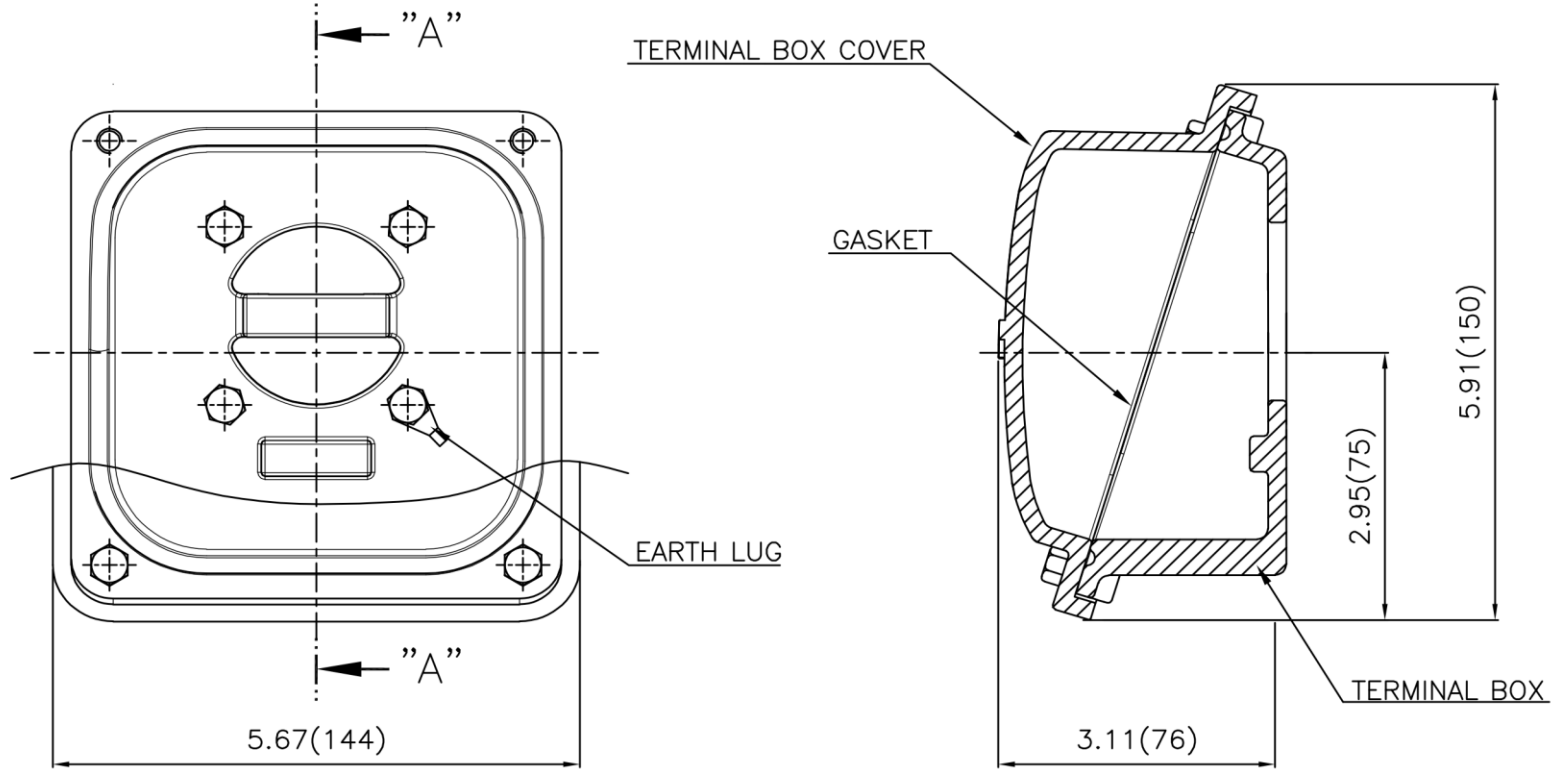

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						

일반가공공차		일반재공공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 140-180 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/1.5	TITLE	TERMINAL BOX ASS'Y	A3 (1:1.5)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬피	DATE	2023-10-19	DWG NO	3M-248456	Revision No.	0

