


Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR

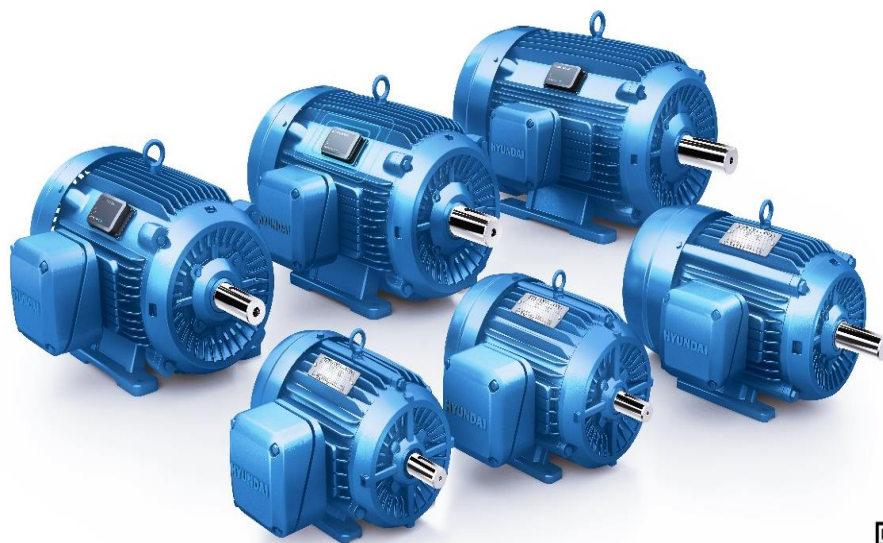

0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HHI125-36-444TS	Item No.			Rev. No.	[]	
Project Name		Project No.			Quantity	sets	
GENERAL SPECIFICATION				PERFORMANCE DATA			
Frame Size	444TS		Rated Output	93 kW		125 HP	
Type	PJP		Number of Poles	2			
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	D.O.L			
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V	
Number of Phases	3		Current	Full Load	109.2 A	136.5 A	273.0 A
Insulation Class	F			Locked-rotor**	700 %	700 %	700 %
Temp. Rise at full load (by resistance method)			Efficiency				
	at 1.0 S.F	80 deg. C					
Motor Location	☐ Indoor ☐ Outdoor		50% Load 92.0 %				
Altitude	Less than 1,000 meter		75% Load 94.0 %				
Relative Humidity	Less than 80 %		100% Load 95.0 %				
Ambient Temp.	40 deg. C (Max.)		Power Factor(p.u)				
Duty Type	Continuous (S1)		50% Load 0.750				
Service Factor	1.15		75% Load 0.850				
Mounting	B3		100% Load 0.900				
Bearing	Type	Anti-Friction	Speed at Full Load 3570 r.p.m				
	DE/N-DE	6314C3 / 6314C3	Torque				
	Lubricant	Grease(Polyrex-EM)	Full Load 183.52 lb.ft				
External Thrust	Not applicable		Locked-rotor** 120 %				
Coupling Method	☒ Direct ☐ V-belt		Breakdown** 220 %				
Shaft Extension	Single		Moment of Inertia (J)				
Terminal	Main	Cast Iron	Load(Max.) 238.491 lb.ft2				
Box	Aux.	No	Motor 27.420 lb.ft2				
	Location	Refer to Outline Drawing	Sound Pressure Level (No-load & mean value at 1m from motor)				
Application			92 dB(A)				
Area classification	Hazardous		Vibration 3.8 mm/sec (peak)				
Type of Ex-Protection	Class I&II, Division 2		Permissible number of Cold 3 times				
Applicable Standard	NEMA MG1, CSA C390		consecutive starts Hot 2 times				
			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3	LM-T1444B3CL001	1610 lb.		
			REMARK				
			1. Premium efficiency according to NEMA MG1				
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise				
			-. 10:1 VT (20:1 VT at 50% load)				
			-. 10:1 CT (1 hour duty, 4:1 continuous)				
			-. CHP up to 1.5 times base speed, NEMA MG1 Part31				
			3. CSA Certification				
			-. Class I, Division 2, Group A, B, C & D				
			-. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)				
			4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.				
			5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.				
			6. Temp. code : T3A(180°C) at sine wave				
			Date	DSND	CHKD	CHKD	APPD
			2025-07-22	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.


** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

MAIN NAMEPLATE

4.72

125HP		2P	230/460V		Cat. No.	HHI125-36-444TS					
Model	HLS444SR02U3				INS. Class	F	HD-F1	Amps	273.0/136.5A		
Type	HLS	Duty	CONT		Code	G	Amb.	40°C	Hertz	60Hz	
Frame	444TS	Encl.	TEFC		S.F.	1.15	RPM	3570	NEMA Nom. Eff.	95.0%	
Bearing	Drive	6314C3				S.F.1.00 (10:1 C.T., 20:1 V.T., NEMA-MG1 Part31)				3/4 Eff.	94.0%
	Opp.	6314C3								NEMA Design	B
Usable at	50Hz 125HP 380V 165.4A 2962rpm S.F.: 1.0 Eff.: 94.8% Code: E										
	50Hz 125HP 400/415V 157.5/152.5A 2966/2969rpm S.F.: 1.0 Eff.: 94.9/95.0% Code: F/G										
CSA Certified for	Model	LATER	Type	PJP	Temp. Code	Frame	140~320FR	360~400FR	440FR		
	CLASS I, Div. 2, Gr. A, B, C & D	CLASS II, Div. 2 Gr. E, F & G (Gr. E: Up to 320FR)			Amb. 40°C	T3C (160°C)	T3B (165°C)	T3A (180°C)			
	CLASS I, Zone 2, Gr. IIA, IIB, & IIC				Amb. 55°C	T3A (180°C)	T3A (180°C)	T3 (200°C)			
No.	-				Date	-				Weight	1610 lb
4M-135702					Made in Korea H1					HD HYUNDAI ELECTRIC	
MARINE DUTY IEEE45											

WIRING DIAGRAM

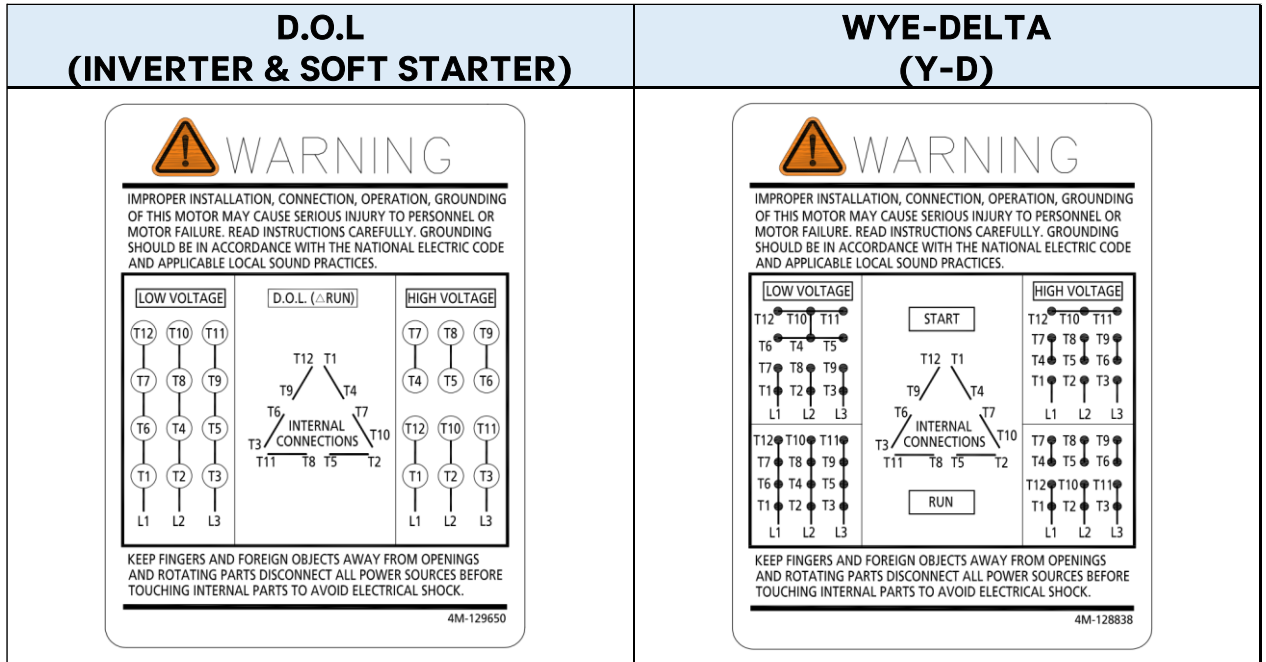


APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HHI, 364-449)		DWG SIZE
CHKD BY	I.K.KIM	SCALE	NONE	TITLE NAMEPLATE DRAWING			A4 (1:1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle				
DSND BY	S.H.LEE	DATE	2024.06.07				
HD HYUNDAI ELECTRIC				REF. NO	4M-135702 / 4M-129650	Sheet No.	of
				DWG NO	NP-HHI125-36-444TS	Revision No.	0


Type :	PJP	
Full Load Torque :	183.52	lb.ft
Load moment of Inertia (J) :	238.491	lb.ft2
Motor moment of Inertia (J) :	27.420	lb.ft2

93kW	125HP	2 P	60 Hz
Speed at Full Load :		3570 RPM	
Rated Voltage	575V	460V	230V
Full Load Current	109.2A	136.5A	273.0A


SPEED VS TORQUE & CURRENT CURVE

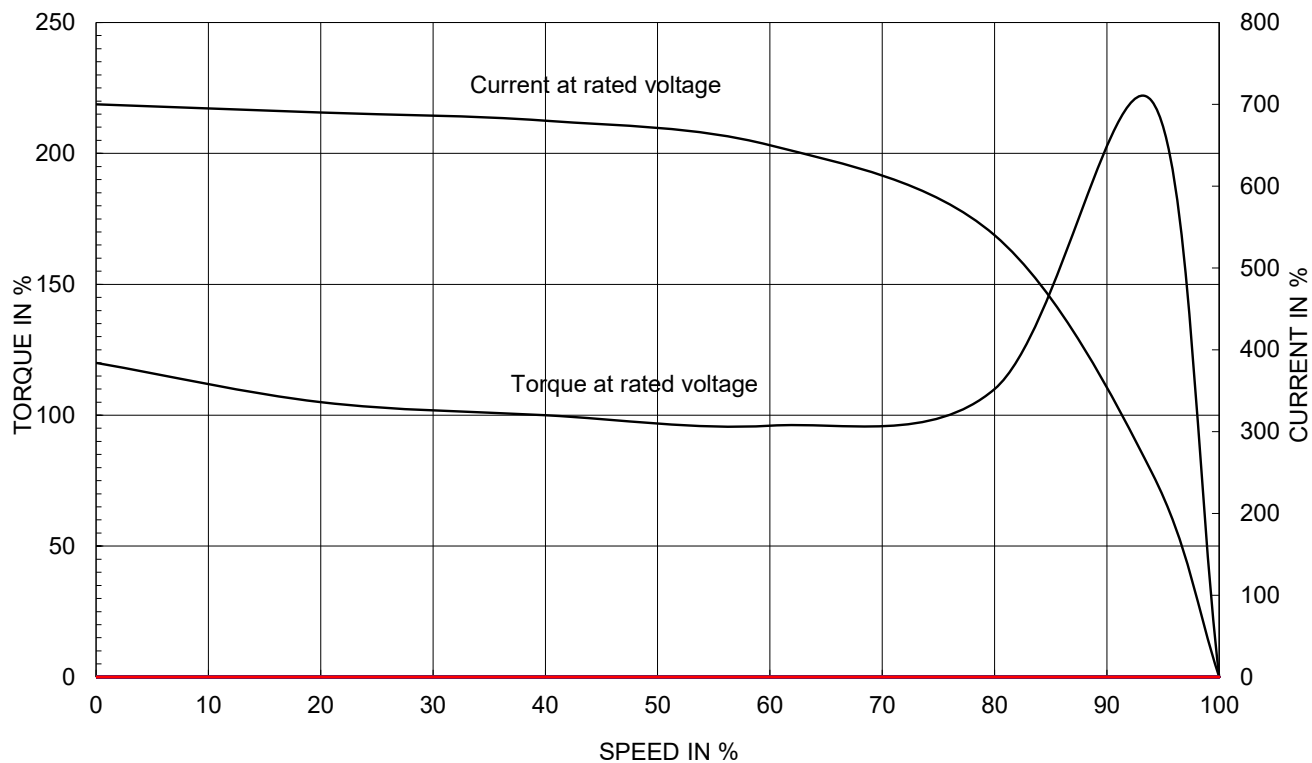

OUTPUT VS EFF., P.F & CURRENT CURVE

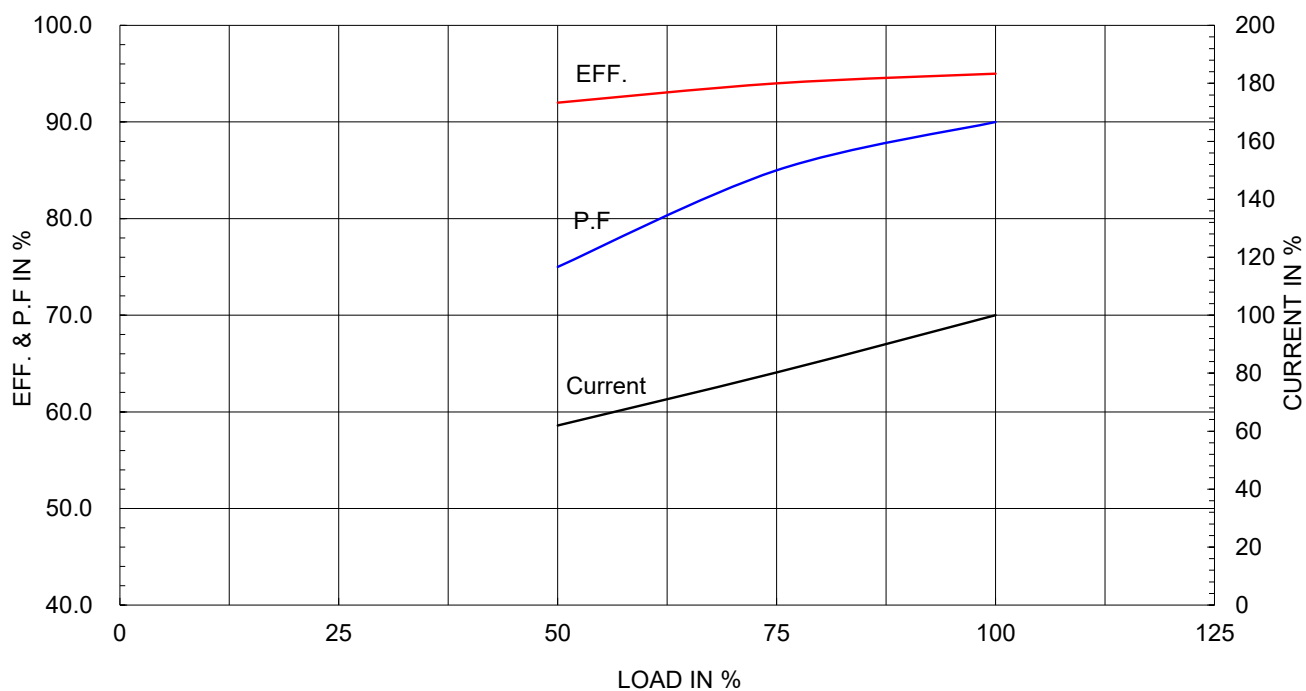

1			2			3			4		
▽	50S	REV	DATE	CONTENTS			REVD BY	CHKD BY	CHKD BY	APPD BY	
▽▽	12.5S										
▽▽▽	3.2S										
▽▽▽▽	0.4S										

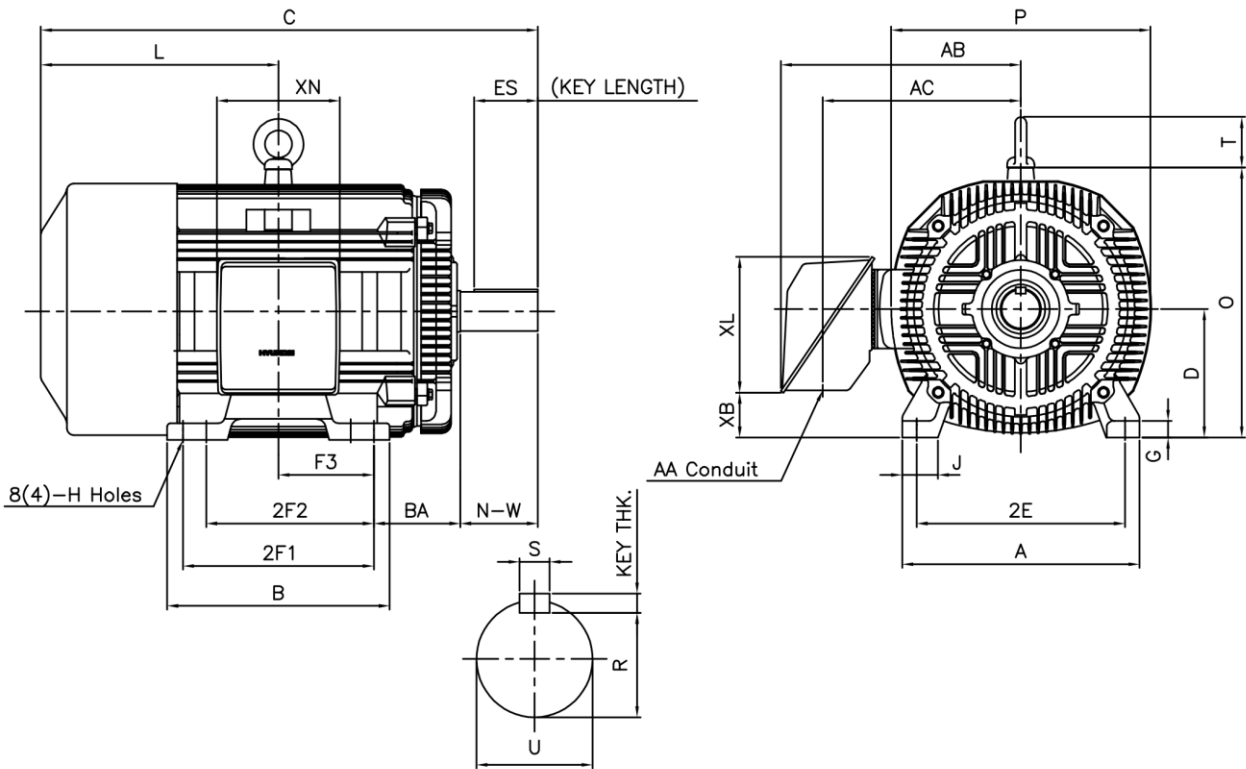

DIMENSIONS

unit : inch

M O U N T I N G									C O N D U I T B O X						APPROX. WGT.(LB)
A	B	2E	2F1	2F2	F3	G	J	H	AA	AB	AC	XB	XL	XN	
20.51	19.21	18.00	(16.50)	14.50	8.248	1.42	3.07	0.81	3.00	21.26	18.03	3.83	11.65	10.63	1610

O V E R A L L									S H A F T			KEY	B E A R I N G	
BA	C	D	L	O	P	T	U	N-W	KEYWAY			THK.	DRIVE END	OPP. DRIVE END
									R	ES	S			
7.50	41.46	11.00	20.96	23.19	22.40	4.33	2.375	4.75	2.021	3.03	0.625	0.625	6314C3	6314C3



NOTE

1. Dimension "D" tolerance : +0.00inch - 0.03inch (143T-365T) ; +0.000inch - 0.06inch (404T-449T)
2. Dimension "U" tolerance : +0.000inch - 0.005inch (143T-215T), +0.000inch - 0.001inch (254T-449T)
3. Dimension "R" tolerance : +0.000inch - 0.015inch

APPD BY	S.K.HAN	UNIT	INCH	SUBJECT	444TS	DWG SIZE	A4 (1:1)
Q.P CHK	I.K.KIM	SCALE	NONE	TITLE OUTLINE			
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle				
DSND BY	B.Y.KIM	DATE	2019.06.05				
				REF. NO	350A1117BA	Sheet No.	of
				DWG NO	LM-T1444B3CL001	Revision No.	0

Cls. I&II, Div. 2

IEEE 841

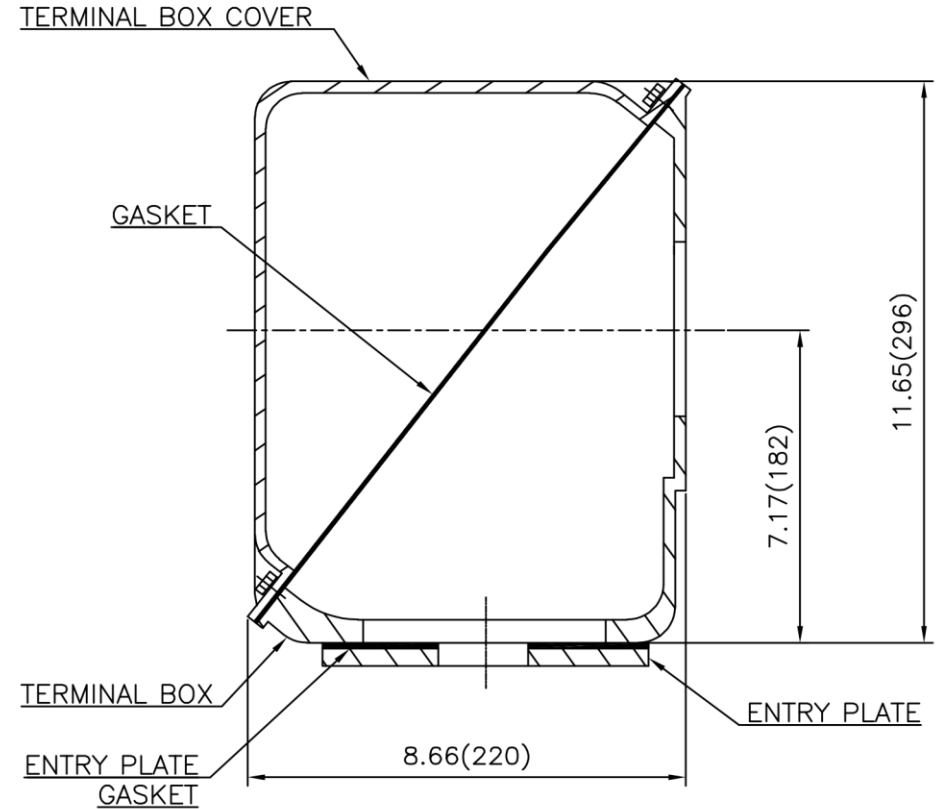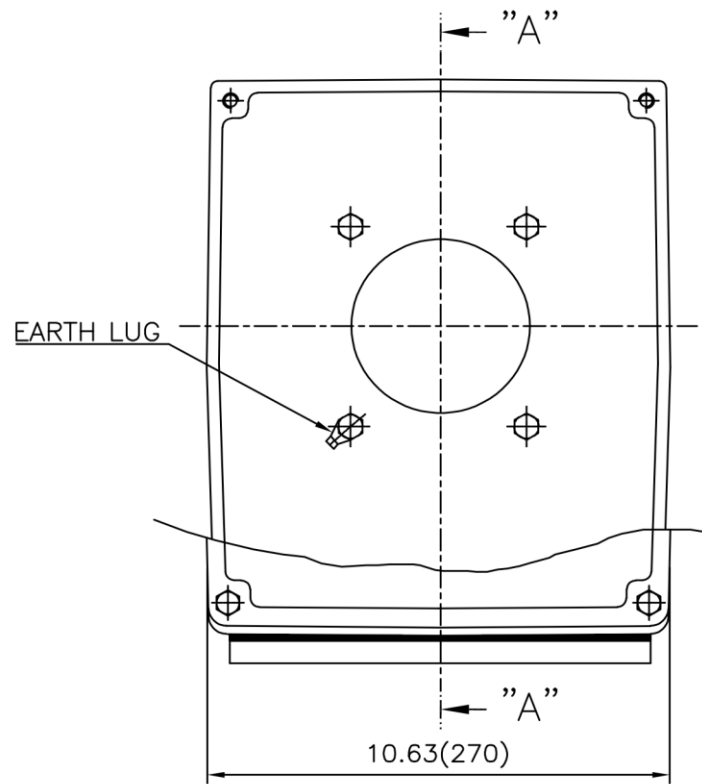

SEC. "A" - "A"

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						
2						
3						
4						

일반가공공차		일반계관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 400-440 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/1.2	TITLE	MAIN TERMINAL BOX ASS'Y		
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬피	DATE	2023-10-19	DWG NO	3M-248451	Revision No.	0

