

Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

AC INDUCTION MOTOR DATA SHEET

Catalog No.	HSDE500-12-5011-IBBRSRSH	Item No.			Rev. No.	[]	
Project Name		Project No.			Quantity	sets	
GENERAL SPECIFICATION				PERFORMANCE DATA			
Frame Size	5011		Rated Output	375 kW		500 HP	
Type	PJP		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	D.O.L			
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V	
Number of Phases	3		Current	Full Load	467.9 A	584.9 A	1169.8 A
Insulation Class	F			Locked-rotor**	675 %	675 %	675 %
Temp. Rise at full load (by resistance method)			Efficiency				
	at 1.0 S.F	80 deg. C	50% Load 92.8 %				
Motor Location	☐ Indoor ☐ Outdoor		75% Load 94.8 %				
Altitude	Less than 1,000 meter		100% Load 95.8 %				
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load 0.690				
Duty Type	Continuous (S1)		75% Load 0.790				
Service Factor	1.15		100% Load 0.840				
Mounting	B3		Speed at Full Load	1185 r.p.m			
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	NU324 / 6320C3-INS.	Full Load 2229.42 lb.ft				
	Lubricant	Grease(Polyrex-EM)	Locked-rotor** 135 %				
External Thrust	Not applicable		Breakdown** 220 %				
Coupling Method	☐ Direct ☐ V-belt		Moment of Inertia (J)				
Shaft Extension	Single		Load(Max.) 4,666.000 lb.ft2				
Terminal	Main	Cast Iron	Motor 272.448 lb.ft2				
Box	Aux.	Yes	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	84 dB(A)				
Application			Vibration 3.8 mm/s (peak)				
Area classification	Hazardous		Permissible number of Cold 2 times				
Type of Ex-Protection	Class I&II, Division 2		consecutive starts Hot 1 time				
Applicable Standard	NEMA MG1, CSA C390		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
ACCESSORIES			SUBMITTAL DRAWING				
*. B.T.D.(Pt 100 Ω at 0°C,Single) : 2EA/Motor			Outline Dimension Drawing \ Motor Weight(Approx.)				
*. W.T.D.(Pt 100 Ω at 0°C) : 2EA/Ph.			B3 LM-T0511B3P7001 4850 lb.				
*. Space Heater : 1EA/Motor							
			REMARK				
			1. Premium efficiency according to NEMA MG1				
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise				
			-. 10:1 VT (20:1 VT at 50% load)				
			-. 10:1 CT (1 hour duty, 4:1 continuous)				
			-. CHp up to 1.5 times base speed, NEMA MG1 Part31				
			3. NDE side : Insulated bearing				
			4. CSA Certification				
			-. Class I, Division 2, Group A, B, C & D				
			-. Class II, Division 2 Group F & G				
			5. Shaft material : AISI4140				
			6. Temp. code : T3(200°C) at sine wave				
			Date	DSND	CHKD	CHKD	APPD
			2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

MAIN NAMEPLATE

4.72

500HP		6P	460V	Cat. No.	HSDE500-12-5011-IBBRSRSH				
Model	-			INS. Class	F		Amps	584.9A	
Type	PJP	Duty	CONT	Code	G	Amb.	40°C	Hertz	60Hz
Frame	5011	Encl.	TEFC	S.F.	1.15	RPM	1185	NEMA Nom. Eff.	95.8%
Bearing	Drive	NU324		S.F.1.00 (10:1 C.T., 20:1 V.T., NEMA-MG1 Part31)				3/4 Eff.	94.8%
	Opp.	6320C3-INS.						NEMA Design	B Torque
Usable at	50Hz 420HP 380V 594.7A 985rpm S.F.: 1.0 Eff.: 95.8% Code: G								
	50Hz 420HP 400/415V 515.9/571.7A 986/987rpm S.F.: 1.0 Eff.: 95.8/95.8% Code: G/J								
CSA Certified for	CLASS I, Div. 2, Gr. A, B, C & D		CLASS II, Div. 2, Gr. F & G		Temp. Code		Frame	L440FR - 500FR	
	CLASS I, Zone 2, Gr. IIA, IIB, & IIC				(sine wave)		Amb. 40°C	T3 (200°C)	
							Amb. 55°C	T3 (200°C)	
No.	-			Date	-			Weight	4850 lb
4M-137952				Made in Korea H1				HD HYUNDAI ELECTRIC	
MARINE DUTY IEEE45									

2.36

WIRING DIAGRAM

D.O.L (INVERTER & SOFT STARTER)	WYE-DELTA (Y-D)
WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-129326	WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128852

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 Severe Duty (HSDE, L449-500)		DWG SIZE	
CHKD BY	I.K.KIM	SCALE	NONE	NAMEPLATE DRAWING				A4 (1:1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle					
DSND BY	S.H.LEE	DATE	2024.06.07					
HD HYUNDAI ELECTRIC				REF. NO	4M-137952 / 4M-129326	Sheet No.	of	
				DWG NO	NP-HSDE500-12-5011-IBBRSRSH	Revision No.	0	

Type : PJP

375kW 500HP

6 P

60 Hz

Full Load Torque : 2229.42 lb.ft

Speed at Full Load : 1185 RPM


Load moment of Inertia (J) : 4666.000 lb.ft2

Rated Voltage	575V	460V	230V
---------------	------	------	------


Motor moment of Inertia (J) : 272.448 lb.ft2

Full Load Current	467.9A	584.9A	1169.8A
-------------------	--------	--------	---------



SPEED VS TORQUE & CURRENT CURVE

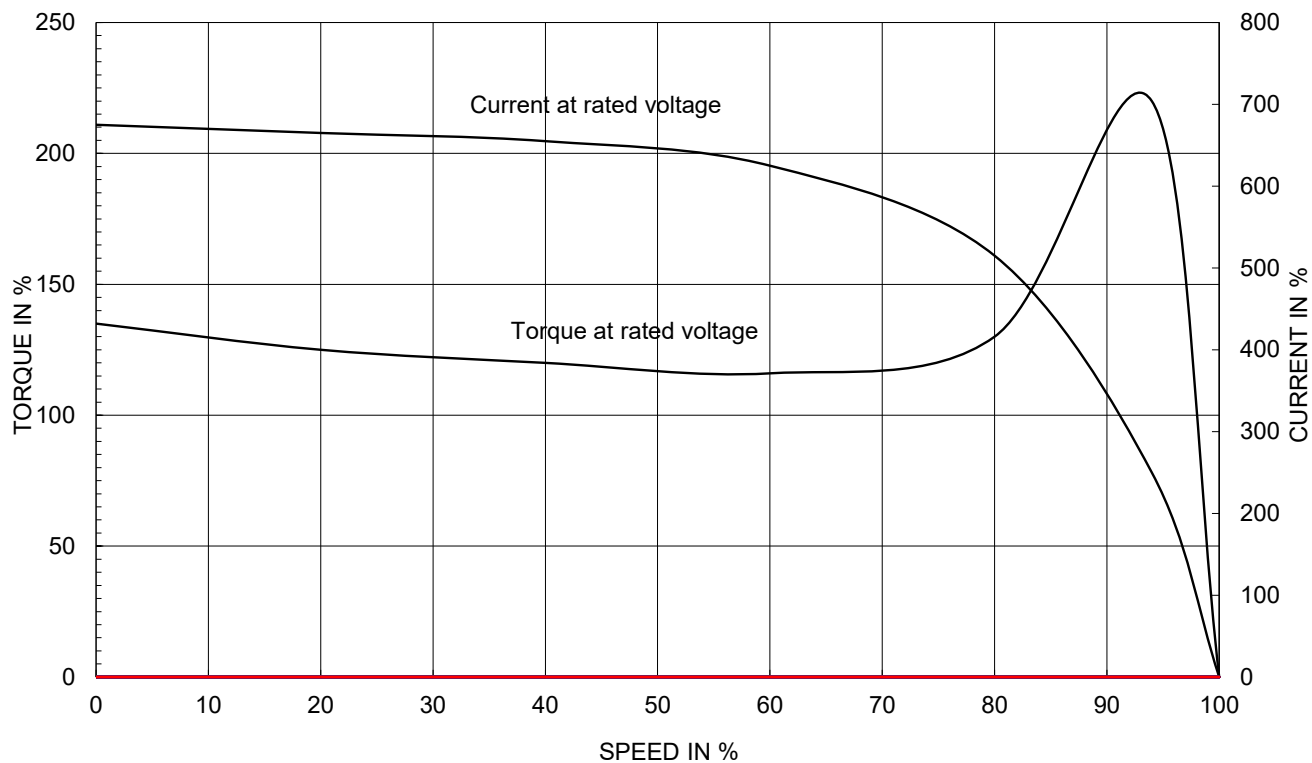

OUTPUT VS EFF., P.F & CURRENT CURVE

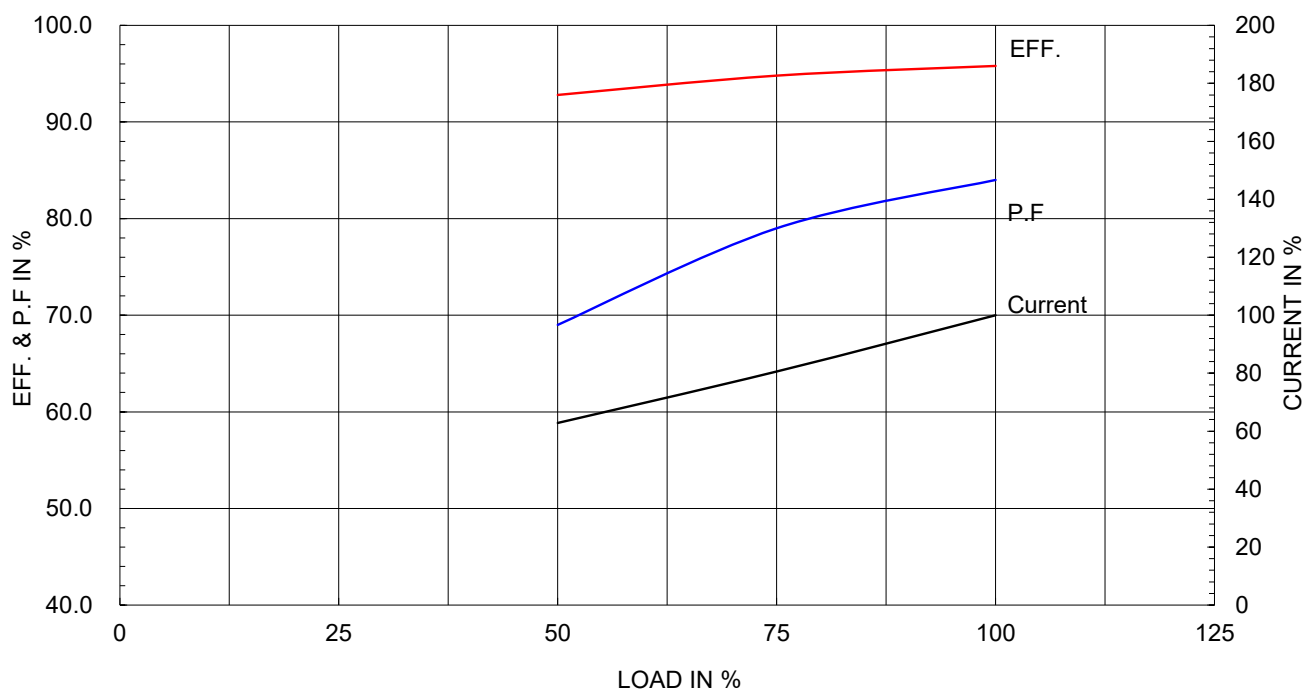


1			2		3		4		
▽	50S	REV	DATE	CONTENTS		REVD BY	CHKD BY	CHKD BY	APPD BY
▽▽	12.5S								
▽▽▽	3.2S								
▽▽▽▽	0.4S								

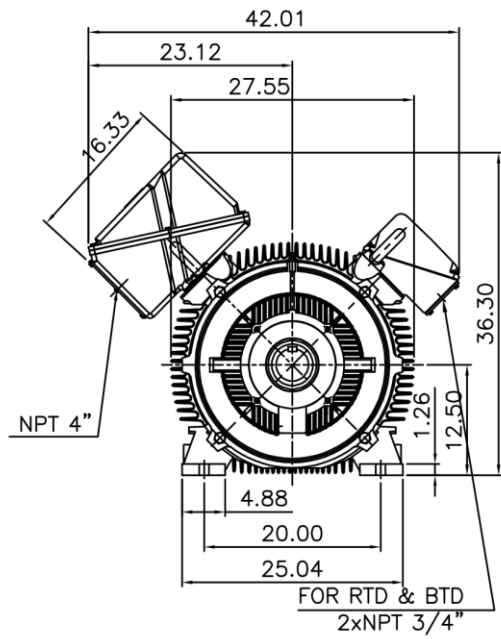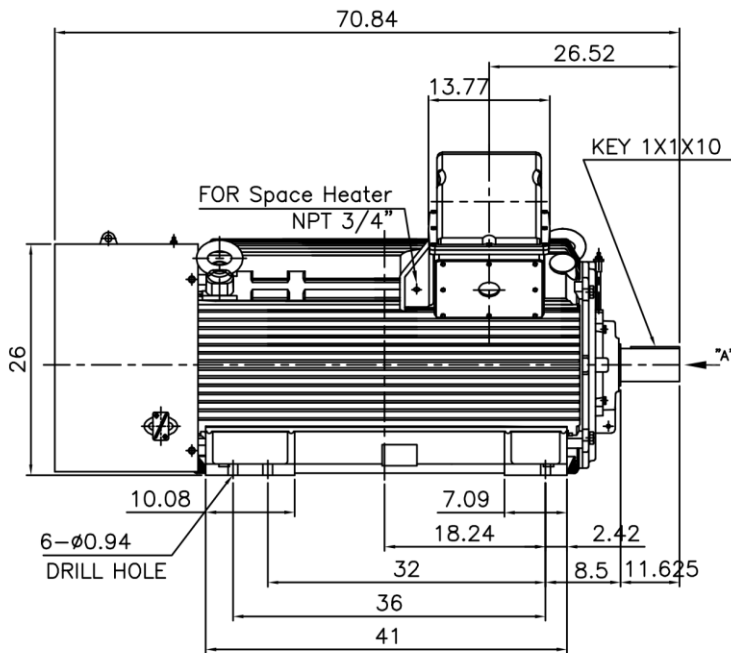

NOTE

1.TOLERANCE :



CENTER HEIGHT	12.5	+0.000 -0.060
SHAFT DIAMETER	ø3.875	+0.000 -0.001
KEYWAY WIDTH	1	+0.003 -0.000

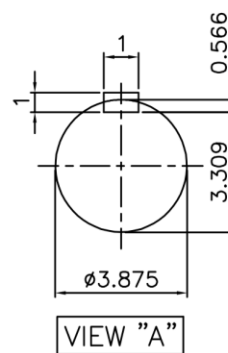

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	Fr.5010/5011	DWG SIZE
CHKD BY	O.J.KIM	SCALE	1/20			A4 (1:20)
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)	TITLE	OUTLINE	
DSND BY	H.K.LEE	DATE	2021-04-27			
				REF. NO		Sheet No. of
				DWG NO	LM-T0511B3P7001	Revision No. 0

Cls. I&II, Div. 2

IEEE 841

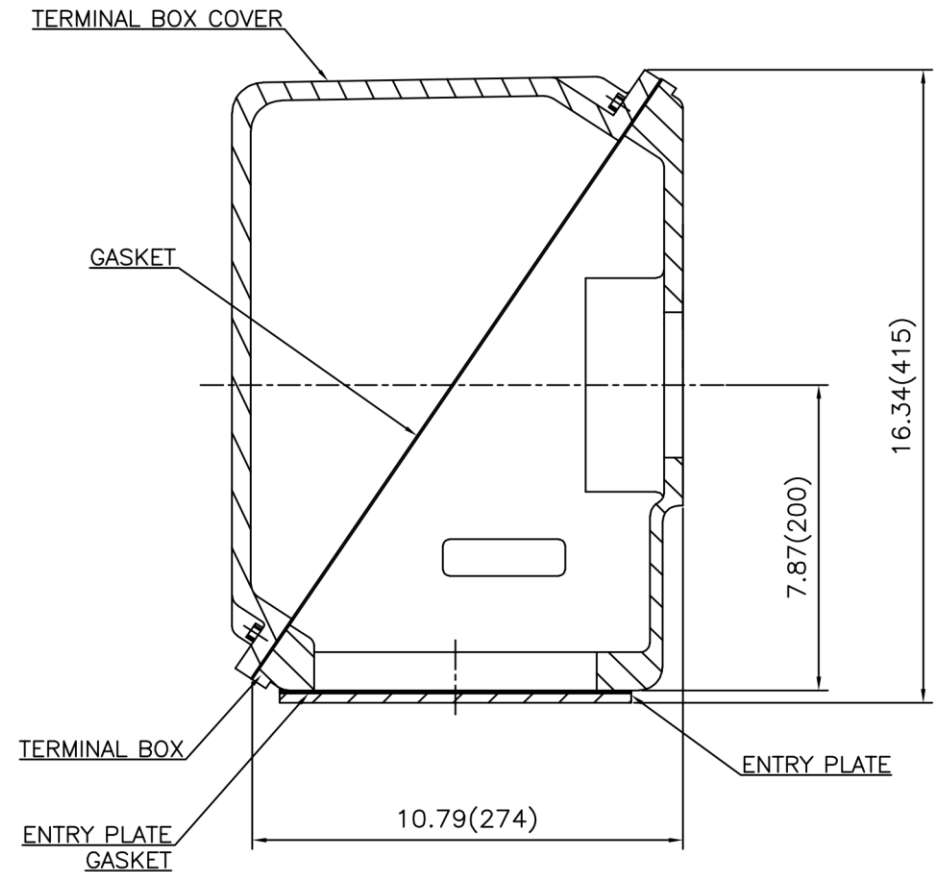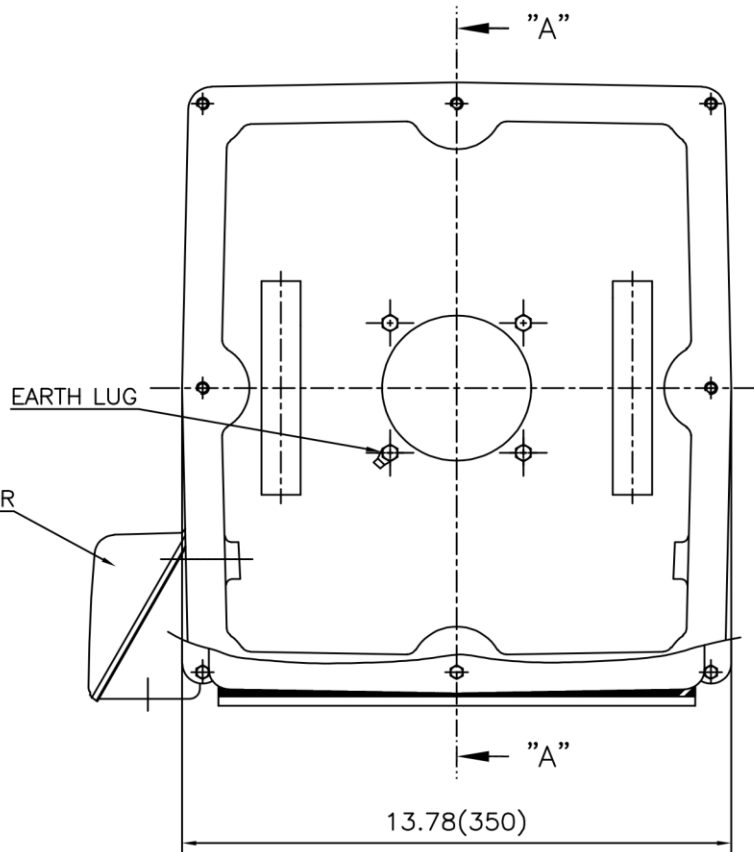



SEC. "A" - "A"

APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. L440 (CAST IRON)	DWG SIZE	A3 (1:3.5)
CHKD BY		SCALE	1/3.5	TITLE	MAIN TERMINAL BOX ASS'Y		
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle				
DSND BY	내수위	DATE	2023-10-19	REF. NO		Sheet No.	of
				DWG NO	3M-248452	Revision No.	0

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

Cls. I&II, Div. 2

IEEE 841


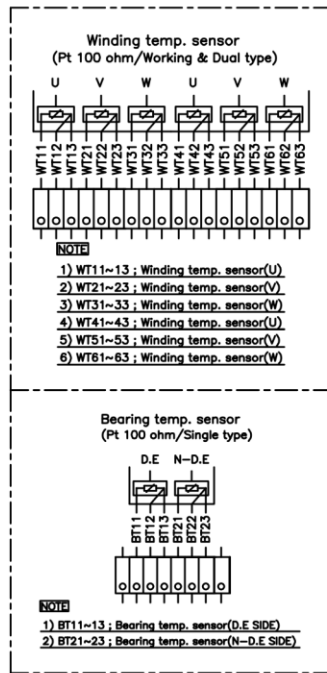
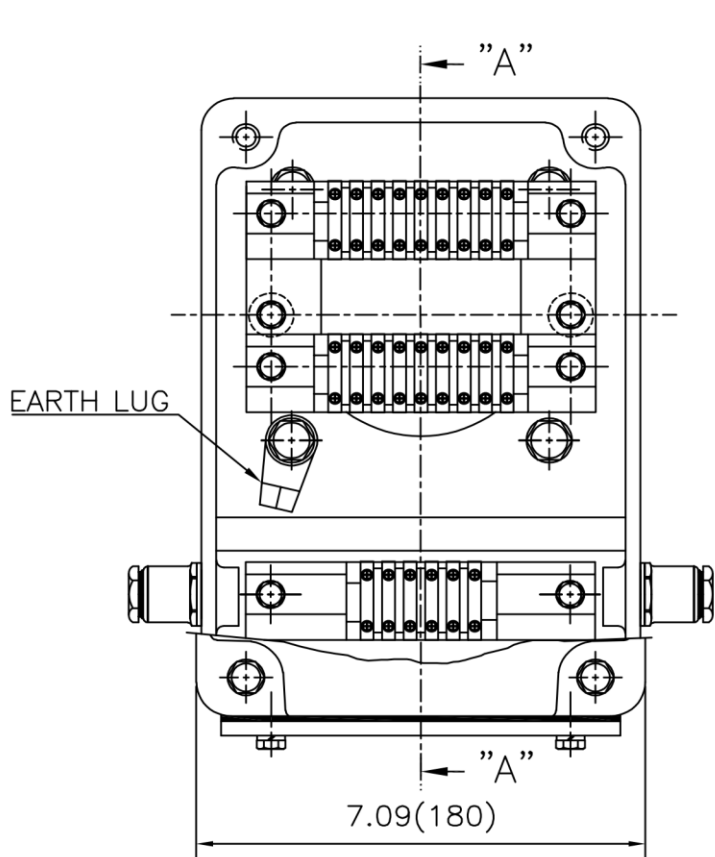


APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR.360 (CAST IRON)	DWG SIZE	A3 (1:2.2)
CHKD BY	R.G.KIM	SCALE	1/1	TITLE AUX. TERMINAL BOX ASS'Y			
DSND BY	배승희	PROJEC'N	3rd Angle				
		DATE	2024-01-18	REF. NO		Sheet No.	of
				DWG NO	3M-165277	Revision No.	0



REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

Cls. I&II, Div. 2
IEEE 841

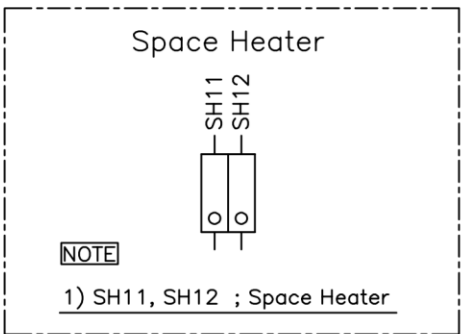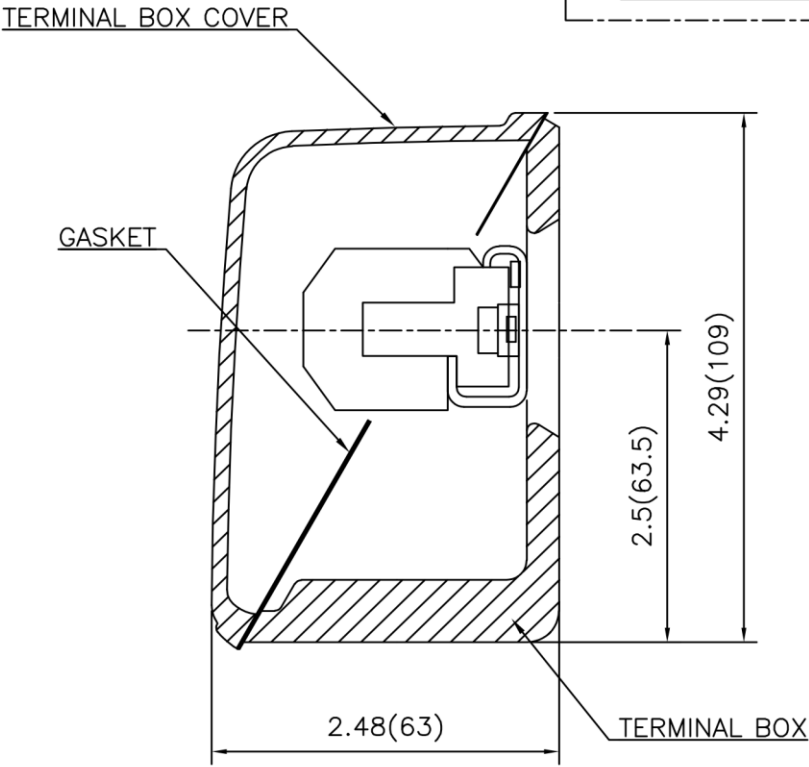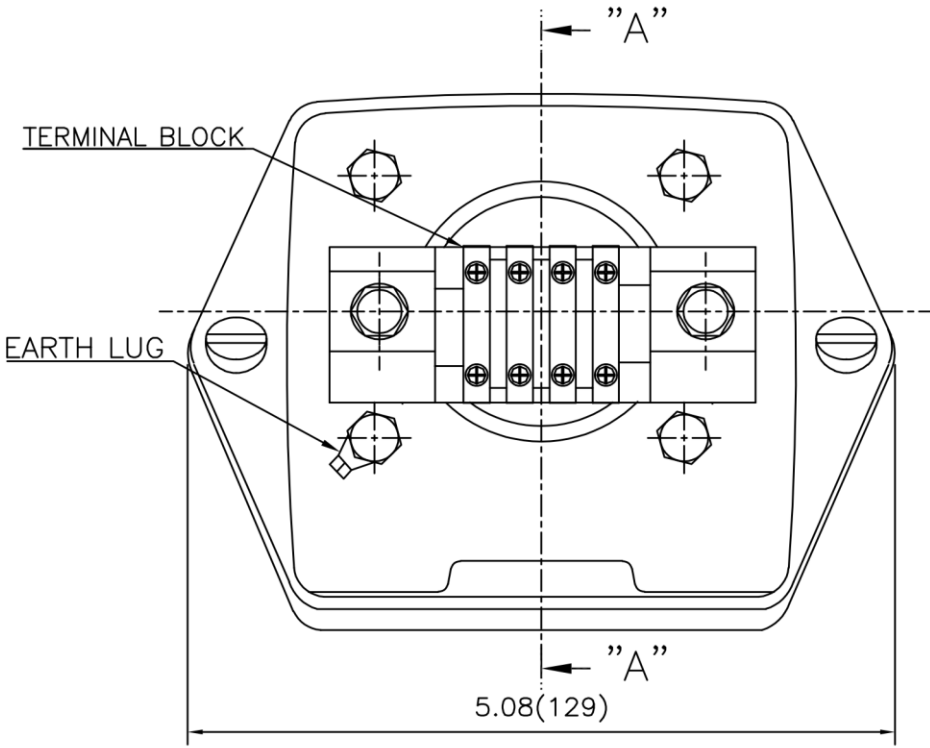

APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR.180 (CAST IRON)	DWG SIZE
CHKD BY		SCALE	1/1	TITLE		A3 (1:1.1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle			
DSND BY	배승희	DATE	2024-01-18	SUB. TERMINAL BOX ASS'Y		
				REF. NO		Sheet No. of
				DWG NO	3M-165278	Revision No. 0

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY