

Customer :  
Project Name :  
Project No. :  
Revision No. :

# SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY



# AC INDUCTION MOTOR DATA SHEET

## IEEE841 TYPE

Catalog No.	IEEE15-12-284TC	Item No.	Rev. No.	[      ]
Project Name		Project No.	Quantity	sets

GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	284TC		Rated Output	11 kW		15 HP	
Type	PJP		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	D.O.L			
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V	
Number of Phases	3		Current	Full Load	15.6 A	19.6 A	
Insulation Class	F			Locked-rotor**	600 %	600 %	600 %
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F			80 deg. C				
Motor Location	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor		50% Load		88.7 %		
Altitude	Less than 1,000 meter		75% Load		90.7 %		
Relative Humidity	Less than 80 %		100% Load		91.7 %		
Ambient Temp.	40 deg. C (Max.)		Power Factor(p.u)				
Duty Type	Continuous ( S1 )		50% Load		0.620		
Service Factor	1.15		75% Load		0.720		
Mounting	B35		100% Load		0.770		
Bearing	Type	Anti-Friction	Speed at Full Load				
	DE/N-DE	6310ZC3 / 6310ZC3	1175 r.p.m				
	Lubricant	Grease(Polyrex-EM)	Torque				
External Thrust	Not applicable		Full Load		66.0 lb.ft		
Coupling Method	<input checked="" type="checkbox"/> Direct <input type="checkbox"/> V-belt		Locked-rotor**		155 %		
Shaft Extension	Single		Breakdown**		240 %		
Terminal	Main	Cast Iron	Moment of Inertia (J)				
Box	Aux.	No	Load(Max.)		242.105 lb.ft2		
	Location	Refer to Outline Drawing	Motor		4.984 lb.ft2		
Application			Sound Pressure Level (No-load & mean value at 1m from motor)				
Area classification	Hazardous		66 dB(A)				
Type of Ex-Protection	Class I&II, Division 2		Vibration				
Applicable Standard	IEEE841, NEMA MG1, CSA C390		3.8 mm/sec (peak)				
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing		Motor Weight(Approx.)		
			B35	LM-I1284C4PL001	380 lb.		
SPARE PARTS			REMARK				
			1. Premium efficiency according to NEMA MG1				
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise				
			- 10:1 VT (20:1 VT at 50% load)				
			- 10:1 CT				
- CHP up to 1.5 times base speed, NEMA MG1 Part31							
3. CSA Certification							
- Class I, Division 2, Group A, B, C & D							
- Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)							
4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.							
5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.							
Date		DSND	CHKD	CHKD	APPD		
2024-07-13		S.H. Lee	I.K. Kim	R.G. Kim	S.W. Kim		

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.  
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.  
 Inspection and performance test shall be done according to maker standard, if not mentioned.  
 \* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.  
 \*\* Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

1	2	3	4
REV	DATE	CONTENTS	REVD BY   CHKD BY   CHKD BY   APPD BY

4.72

15HP	6P	460V	Cat. No.	IEEE15-12-284TC			
Model	HLS284PR33		INS. Class	F	HD-F1	Amps	19.6
Type	HLS	Duty	CONT	Code	G	Amb.	40°C
Frame	284TC	Encl.	TEFC	S.F.	1.15	RPM	1175
Bearing	Drive	6310ZC3		S.F.1.00 (10:1 C.T., 20:1 V.T., NEMA-MG1 Part31)		3/4 Eff.	90.7%
	Opp.	6310ZC3				NEMA Design	B
Usable at	50Hz 10HP 380V 19.3A 975rpm S.F.: 1.0 Eff.: 87.2% Code: J						
	50Hz 10HP 400/415V 20/20.9A 980/980rpm S.F.: 1.0 Eff.: 87.2/87.2% Code: K/L						
CSA Certified for	Model	LATER		Type	PJP		
	CLASS I, Div. 2, Gr. A, B, C & D	CLASS II, Div. 2, Gr. E, F & G (Gr. E : Up to 320FR)		Temp. Code (sine wave)	Frame	140~320FR	360~400FR
	CLASS I, Zone 2, Gr. IIA, IIB, & IIC			Amb. 40°C	T3C (160°C)	T3B (165°C)	T3A (180°C)
				Amb. 55°C	T3A (180°C)	T3A (180°C)	T3 (200°C)
No.	-		Date	-		Weight	380 lb

**IEEE Std 841-2021**

4M-135701

**MARINE DUTY IEEE45**

Made in Korea H1

2.36

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 IEEE841 (HL)	DWG SIZE
CHKD BY	I.K.KIM	SCALE	NONE			A4 ( 1:1 )
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	TITLE <b>NAMEPLATE DRAWING</b>		
DSND BY	S.H.LEE	DATE	2024.06.07			




REF. NO	<b>4M-135701</b>	Sheet No.	of
DWG NO	<b>NP-IEEE15-12-284TC</b>	Revision No.	<b>0</b>


Type :	PJP
Full Load Torque :	66.0 lb.ft
Load moment of Inertia (J) :	242.105 lb.ft2
Motor moment of Inertia (J) :	4.984 lb.ft2

11kW 15HP	6 P	60 Hz
Speed at Full Load :		1175 RPM
Rated Voltage	575V	460V 230V
Full Load Current	15.6A	19.6A 39.1A

SPEED VS TORQUE & CURRENT CURVE

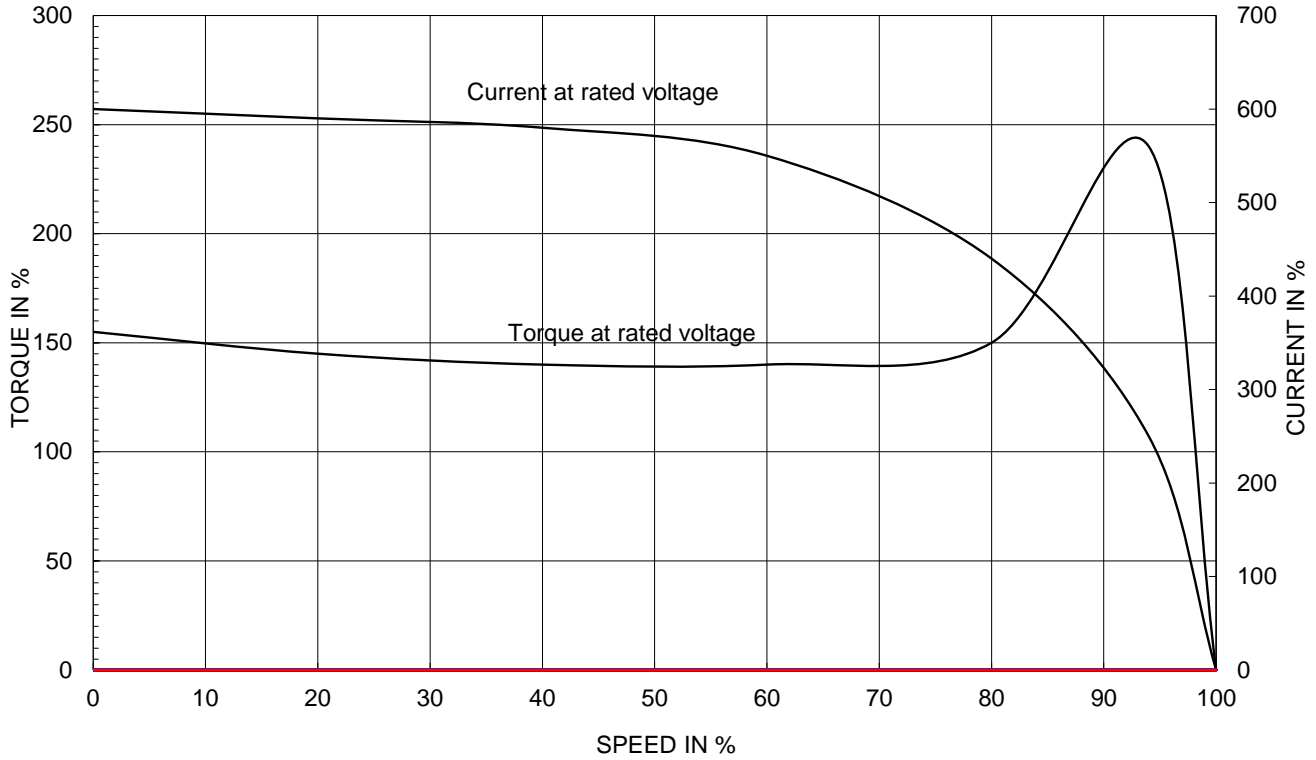

OUTPUT VS EFF., P.F & CURRENT CURVE

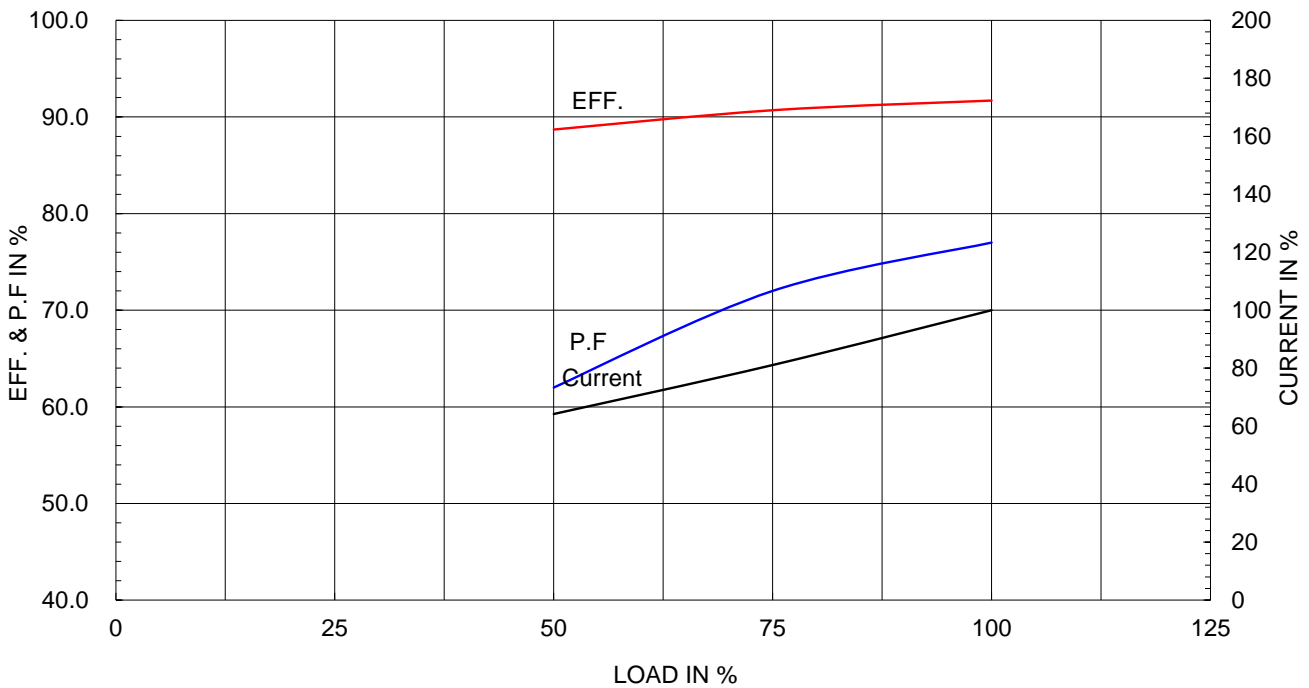


본 도면은 HD현대일렉트릭(주) 재산이며 허가없이 복사할 수 없음 (취급유의)

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

▽	50S	REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY
▽▽	12.5S							
▽▽▽	3.2S							
▽▽▽▽	0.4S							

**IEEE841**

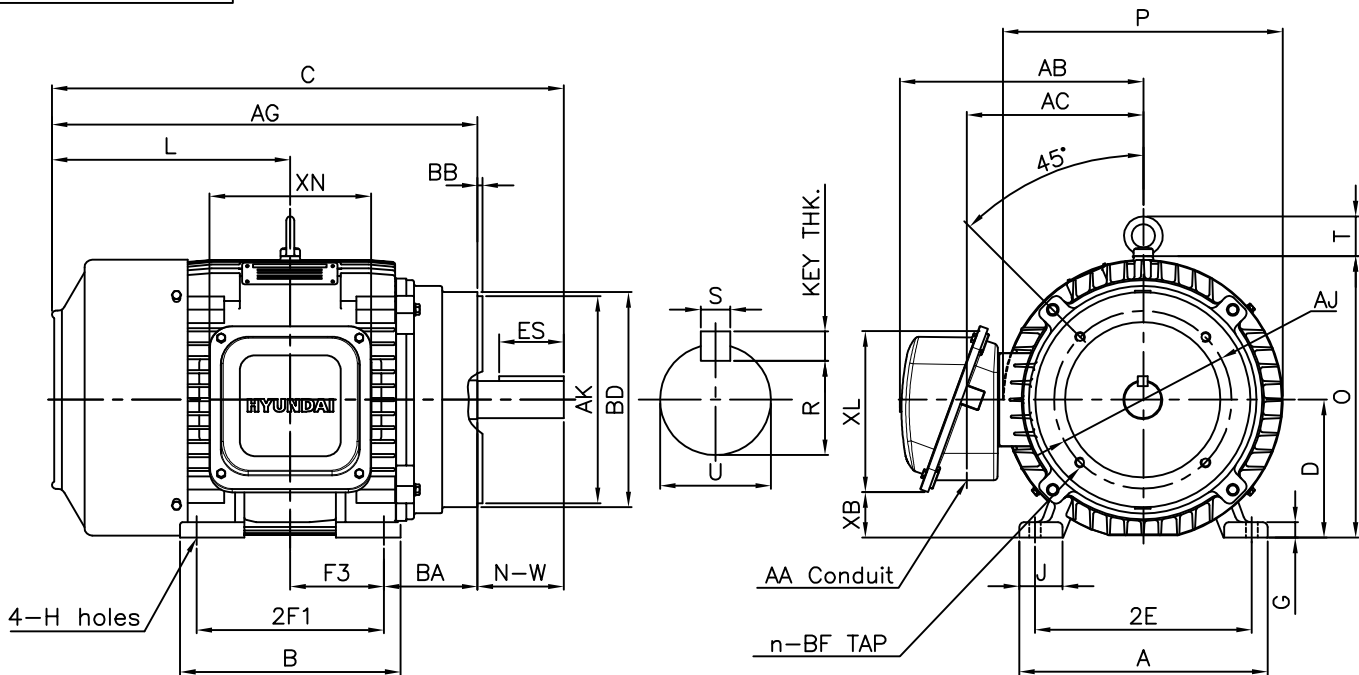

DIMENSIONS

Unit : inch

F L A N G E						M O U N T I N G									
AJ	AK	BD	BB	BF	n	A	B	2E	2F1	2F2	F3	G	J	H	
9.00	10.50	10.9	0.25	1/2-13	4	12.60	11.18	11.00	9.50	-	4.75	0.78	2.20	0.53	

C O N D U I T B O X						O V E R A L L								APPROX. WGT.(LB)
AA	AB	AC	XB	XL	XN	AG	BA	C	D	L	O	P	T	
1.50	12.44	9.06	3.39	8.43	8.19	21.40	4.75	26.02	7.00	12.12	14.28	14.19	2.01	380

S H A F T					KEY THK.	B E A R I N G	
U	N-W	KEYWAY				DRIVE END	OPP. DRIVE END
		R	ES	S			
1.875	4.62	1.591	3.28	0.500	0.500	6310ZC3	6310ZC3

**NOTE**

- 1.Dimension "D" tolerance : +0.00inch - 0.03inch
- 2.Dimension "U" tolerance : +0.000inch - 0.0005inch
- 3.Dimension "R" tolerance : +0.000inch - 0.015inch


APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	NEMA 284TC	DWG SIZE
CHKD BY	R.G.KIM	SCALE	NONE			A4 ( 1:1 )
CHKD BY	Y.H.BAE	PROJEC'N	3각법(3rd Angle)	TITLE <b>OUTLINE</b>		
DSND BY	H.K.LEE	DATE	2021-05-06			



REF. NO	350A8309AA	Sheet No.	of
DWG NO	LM-I1284C4PL001	Revision No.	0



# Cls. I&II, Div. 2 IEEE 841

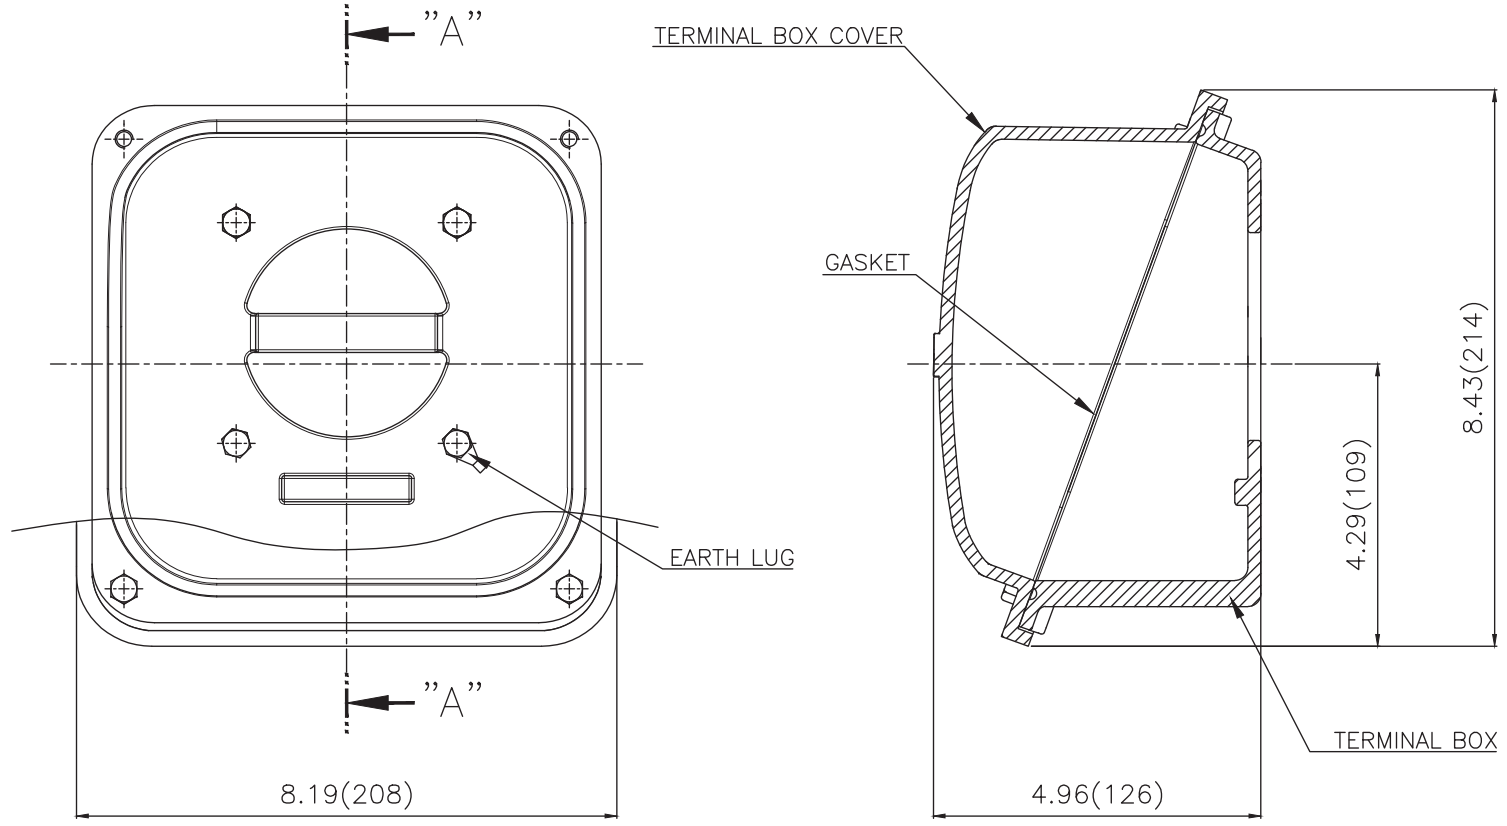

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

일반가공공차		일반제관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 250-280 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/2	TITLE	TERMINAL BOX ASS'Y		
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	DATE	2023-10-19		
DSND BY	배승희						
REF. NO		Sheet No.	of				
DWG NO	3M-248458	Revision No.	0				

