

Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

AC INDUCTION MOTOR DATA SHEET

IEEE841 TYPE

Catalog No.	IEEEV15-12-284TCRD		Item No.			Rev. No.	[]	
Project Name			Project No.			Quantity	sets	
GENERAL SPECIFICATION				PERFORMANCE DATA				
Frame Size	284TC		Rated Output	11 kW		15 HP		
Type	PJP		Number of Poles	6				
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage				
Method of Cooling	IC411(FC)		Starting Method*	D.O.L				
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V		
Number of Phases	3		Current	Full Load	15.6 A	19.6 A	39.1 A	
Insulation Class	F			Locked-rotor**	600 %	600 %	600 %	
Temp. Rise at full load (by resistance method)			Efficiency					
	at 1.0 S.F	80 deg. C	50% Load 88.7 %					
Motor Location	☐ Indoor ☐ Outdoor		75% Load 90.7 %					
Altitude	Less than 1,000 meter		100% Load 91.7 %					
Relative Humidity	Less than 80 %		Power Factor(p.u)					
Ambient Temp.	40 deg. C (Max.)		50% Load 0.620					
Duty Type	Continuous (S1)		75% Load 0.720					
Service Factor	1.15		100% Load 0.770					
Mounting	B5		Speed at Full Load		1175 r.p.m			
Bearing	Type	Anti-Friction	Torque					
	DE/N-DE	6310ZC3 / 6310ZC3	Full Load 65.95 lb.ft					
	Lubricant	Grease(Polyrex-EM)	Locked-rotor** 155 %					
External Thrust	Not applicable		Breakdown** 240 %					
Coupling Method	☒ Direct ☐ V-belt		Moment of Inertia (J)					
Shaft Extension	Single		Load(Max.) 242.105 lb.ft2					
Terminal	Main	Cast Iron	Motor 4.984 lb.ft2					
Box	Aux.	No	Sound Pressure Level (No-load & mean value at 1m from motor)					
	Location	Refer to Outline Drawing	65 dB(A)					
Application			Vibration 2.03 mm/s (peak)					
Area classification	Hazardous		Permissible number of					
Type of Ex-Protection	Class I&II, Division 2		Cold 3 times					
Applicable Standard	IEEE841, NEMA MG1, CSA C390		Hot 2 times					
ACCESSORIES			Paint	Munsell No.	7.5BG6/1.5			
			SUBMITTAL DRAWING					
			Outline Dimension Drawing \ Motor Weight(Approx.)					
			B5	LM-I2284C5PLV23	365 lb.			
SPARE PARTS			REMARK					
			1. Premium efficiency according to NEMA MG1					
			2. Inverter Duty @ 1.0 Service Factor & F Temperature rise					
			-. 10:1 VT (20:1 VT at 50% load)					
			-. 10:1 CT (1 hour duty, 4:1 continuous)					
			-. CHP up to 1.5 times base speed, NEMA MG1 Part31					
			3. CSA Certification					
			-. Class I, Division 2, Group A, B, C & D					
			-. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.)					
			4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power.					
		5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous.						
		6. Temp. code : T3C(160°C) at sine wave						
		Date	DSND	CHKD	CHKD	APPD		
		2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM		

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

MAIN NAMEPLATE

4.72

15HP		6P	460V	Cat. No.	IEEEV15-12-284TCRD				
Model	HLS284PR338V			INS. Class	F	HD-F1	Amps	19.6A	
Type	HLS	Duty	CONT	Code	G	Amb.	40°C	Hertz	60Hz
Frame	284TC	Encl.	TEFC	S.F.	1.15	RPM	1175	NEMA Nom. Eff.	91.7%
Bearing	Drive	6310ZC3			S.F.1.25 (When 100HP or less, Temp Rise F & Non-Hazardous)			3/4 Eff.	90.7%
	Opp.	6310ZC3			S.F.1.00 (10:1 C.T., 20:1 V.T., NEMA-MG1 Part31)			NEMA Design	B
Usable at	50Hz 15HP 380V 25.5A 970rpm S.F.: 1.15 Eff.: 90.2% Code: G								
	50Hz 15HP 400/415V 25.4/25.7A 975/975rpm S.F.: 1.15 Eff.: 90.2/90.2% Code: H/J								
CSA Certified for	Model	-	Type	PJP	Temp. Code	Frame	140~320FR	360~400FR	440FR
	CLASS I, Div. 2, Gr. A, B, C & D	CLASS II, Div. 2 Gr. E, F & G (Gr. E : Up to 320FR)			Amb. 40°C	T3C (160°C)	T3B (165°C)	T3A (180°C)	
	CLASS I, Zone 2, Gr. IIA, IIB, & IIC				Amb. 55°C	T3A (180°C)	T3A (180°C)	T3 (200°C)	
No.	-	Date	-	Weight	365 lb				
MARINE DUTY IEEE45 IEEE Std 841-2021				4M-138416	Made in Vietnam H4 Designed By HYUNDAI, Korea		HD HYUNDAI ELECTRIC		

WIRING DIAGRAM


D.O.L (INVERTER & SOFT STARTER)  WARNING IMPROPER INSTALLATION, CONNECTION, OPERATION, GROUNDING OF THIS MOTOR MAY CAUSE SERIOUS INJURY TO PERSONNEL OR MOTOR FAILURE. READ INSTRUCTIONS CAREFULLY. GROUNDING SHOULD BE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND APPLICABLE LOCAL SOUND PRACTICES. T1 T2 T3 L1 L2 L3 KEEP FINGERS AND FOREIGN OBJECTS AWAY FROM OPENINGS AND ROTATING PARTS DISCONNECT ALL POWER SOURCES BEFORE TOUCHING INTERNAL PARTS TO AVOID ELECTRICAL SHOCK. 4M-128796	WYE-DELTA (Y-D) N/A
---	---

APPD BY	S.Y.KIM	UNIT	INCH	SUBJECT	CSA Class I, Division2 IEEE841 (SSEN, 254-326)		DWG SIZE	
CHKD BY	I.K.KIM	SCALE	NONE	TITLE				A4 (1:1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	NAMEPLATE DRAWING				
DSND BY	S.H.LEE	DATE	2024.06.07					
				REF. NO	4M-138416 / 4M-128796	Sheet No.	of	
				DWG NO	NP-IEEEV15-12-284TCRD	Revision No.	0	


Type :	PJP	
Full Load Torque :	65.95	lb.ft
Load moment of Inertia (J) :	242.105	lb.ft2
Motor moment of Inertia (J) :	4.984	lb.ft2

11kW	15HP	6 P	60 Hz
Speed at Full Load :			1175 RPM
Rated Voltage	575V	460V	230V
Full Load Current	15.6A	19.6A	39.1A

SPEED VS TORQUE & CURRENT CURVE

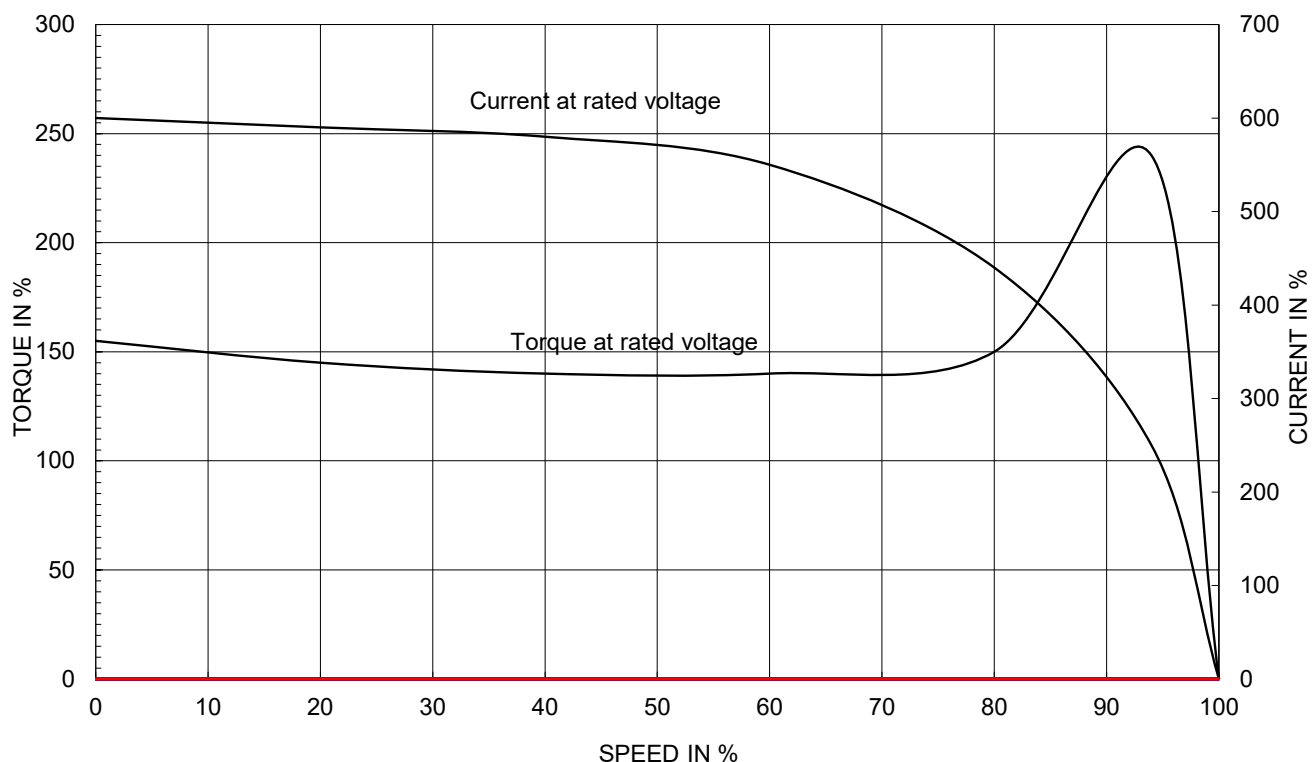


OUTPUT VS EFF., P.F & CURRENT CURVE

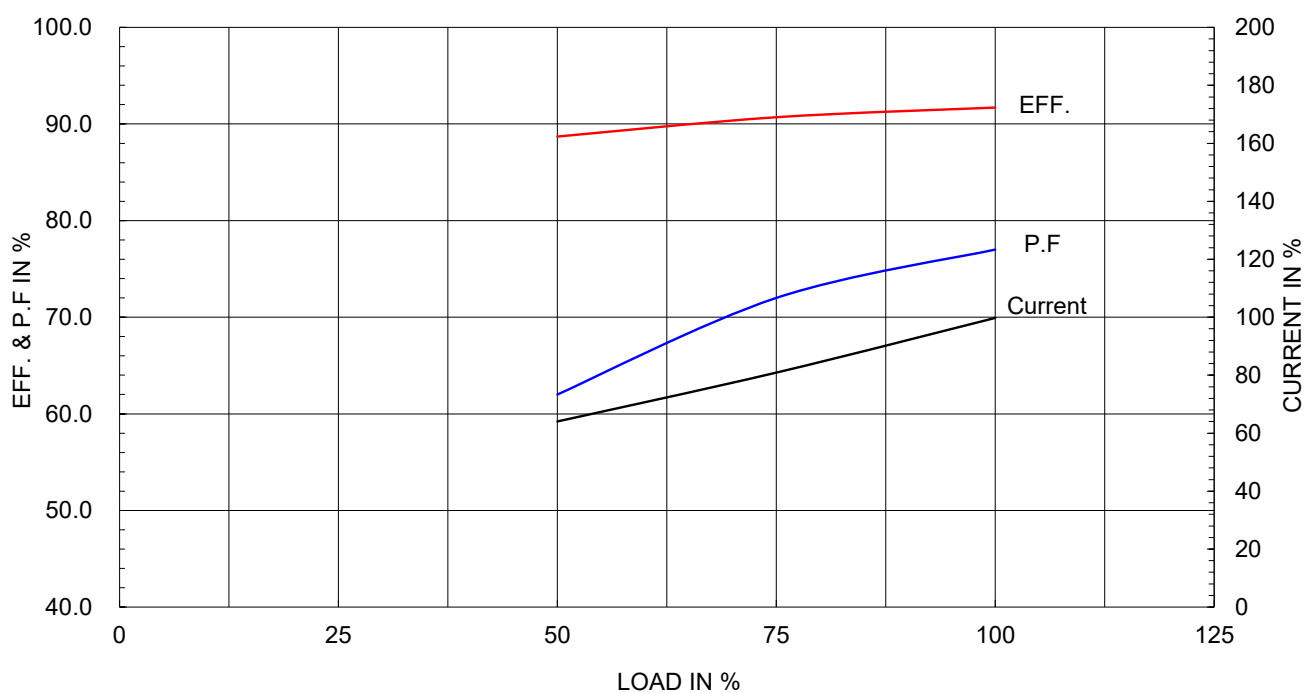

1	2	3	4
▽	50S	REV	DATE
▽▽	12.5S		
▽▽▽	3.2S		
▽▽▽▽	0.4S		

IEEE841

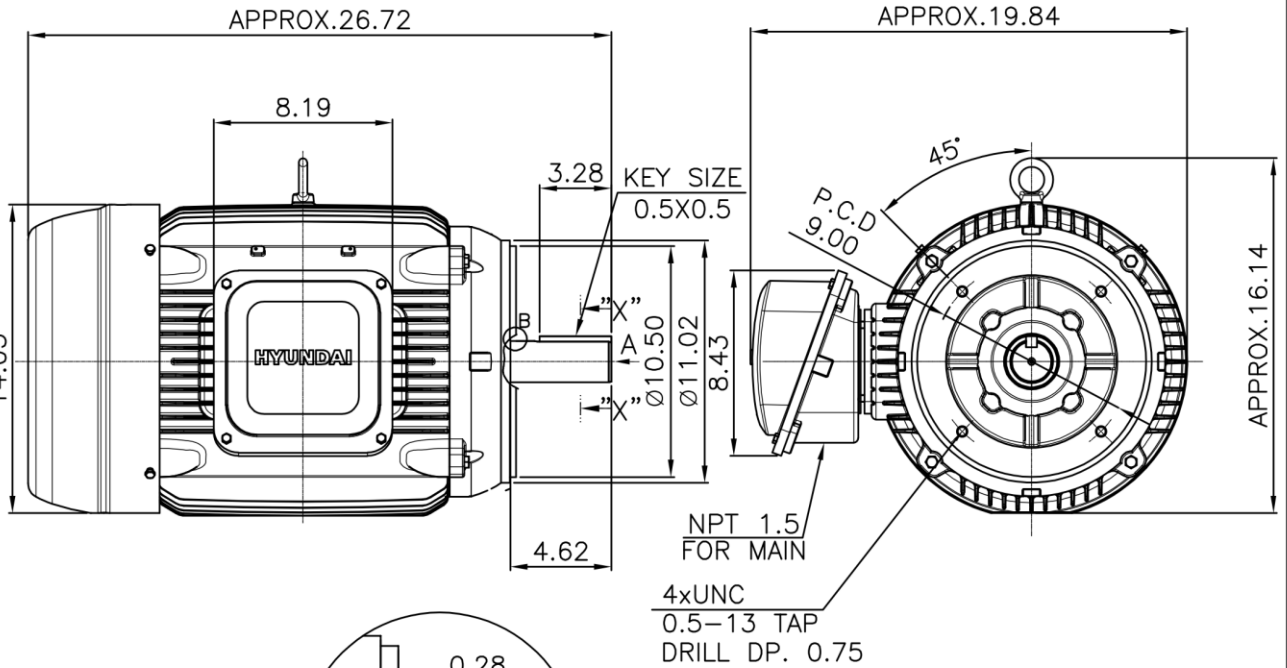


VIEW "A"

DETAIL - B

NOTE

[TOLERANCE]

1. CENTER HEIGHT : +0.00inch - 0.03inch
2. SHAFT DIAMETER : +0.000inch - 0.001inch
3. KEYWAY DEPTH : +0.000inch - 0.015inch




SECTION "X-X"
SCALE 4/8.5

APPD BY	S.Y.KIM	UNIT	inch	SUBJECT	NEMA 284TC	DWG SIZE
CHKD BY	R.G.KIM	SCALE	1/8.5			A4 (1:8.5)
CHKD BY		PROJEC'N	3rd Angle	TITLE	OUTLINE	
DSND BY	주유림	DATE	2021-04-28	REF. NO		Sheet No. of
				DWG NO	LM-I2284C5PLV23	Revision No. 0

Cls. I&II, Div. 2

IEEE 841

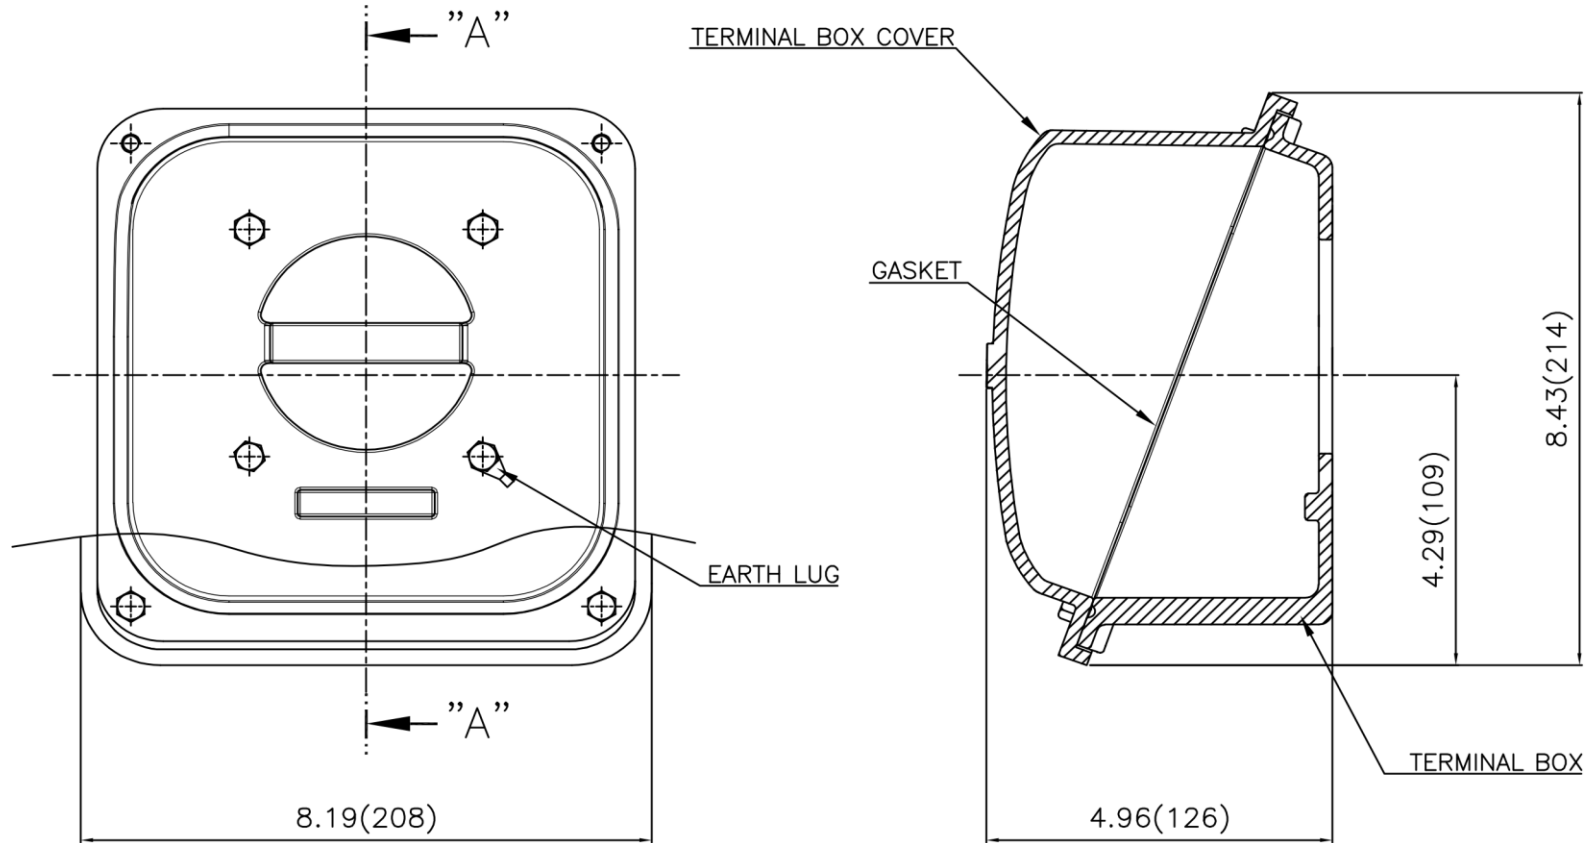

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						

일반가공공차		일반계관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 250-280 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/2	TITLE	TERMINAL BOX ASS'Y	A3 (1:2)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No. of	
DSND BY	네슬의	DATE	2023-10-19	DWG NO	3M-248458	Revision No. 0	

