


Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR

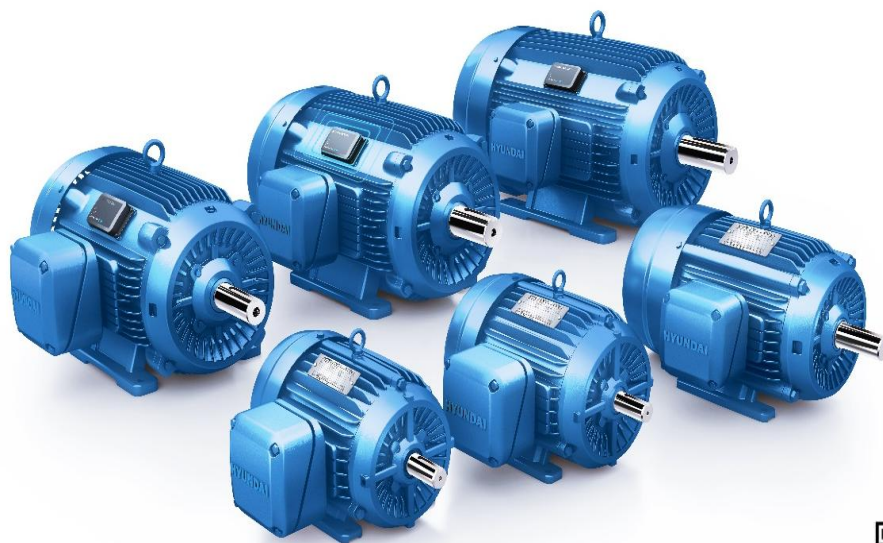

0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY

AC INDUCTION MOTOR DATA SHEET

IEEE841 TYPE

Catalog No.	IEEEV2-12-182/4TC	Item No.				Rev. No.	[]		
Project Name		Project No.				Quantity	sets		
GENERAL SPECIFICATION					PERFORMANCE DATA				
Frame Size	184TC		Rated Output	1.5 kW		2 HP			
Type	PJP		Number of Poles	6					
Enclosure(Protection)	Totally Enclosed / IP55		Rotor Type	Squirrel Cage					
Method of Cooling	IC411(FC)		Starting Method*	D.O.L					
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V			
Number of Phases	3		Current	Full Load	2.50 A	3.13 A	6.26 A		
Insulation Class	F			Locked-rotor**	790 %	790 %	790 %		
Temp. Rise at full load (by resistance method)			Efficiency						
at 1.0 S.F			80 deg. C						
Motor Location	☐ Indoor ☐ Outdoor		50% Load		85.5 %				
Altitude	Less than 1,000 meter		75% Load		87.5 %				
Relative Humidity	Less than 80 %		100% Load		88.5 %				
Ambient Temp.	40 deg. C (Max.)		Power Factor(p.u)						
Duty Type	Continuous (S1)		50% Load		0.530				
Service Factor	1.15		75% Load		0.630				
Mounting	B35		100% Load		0.680				
Bearing	Type	Anti-Friction	Speed at Full Load		1175 r.p.m				
	DE/N-DE	6206ZC3 / 6206ZC3	Torque						
	Lubricant	Grease(Polyrex-EM)	Full Load		8.99 lb.ft				
External Thrust	Not applicable		Locked-rotor**		180 %				
Coupling Method	☒ Direct ☐ V-belt		Breakdown**		260 %				
Shaft Extension	Single		Moment of Inertia (J)						
Terminal	Main	Cast Iron	Load(Max.)		42.358 lb.ft2				
Box	Aux.	No	Motor		0.712 lb.ft2				
	Location	Refer to Outline Drawing	Sound Pressure Level (No-load & mean value at 1m from motor)						
Application			55 dB(A)						
Area classification	Hazardous		Vibration		2.03 mm/s (peak)				
Type of Ex-Protection	Class I&II, Division 2		Permissible number of consecutive starts		Cold	3 times			
Applicable Standard	IEEE841, NEMA MG1, CSA C390		Hot		2 times				
			Paint	Munsell No.	7.5BG6/1.5				
ACCESSORIES			SUBMITTAL DRAWING						
			Outline Dimension Drawing \ Motor Weight(Approx.)						
			B35	LM-I2184C4PLV25	125 lb.				
SPARE PARTS			REMARK						
			1. Premium efficiency according to NEMA MG1 2. Inverter Duty @ 1.0 Service Factor & F Temperature rise -. 10:1 VT (20:1 VT at 50% load) -. 10:1 CT -. CHP up to 1.5 times base speed, NEMA MG1 Part31 3. CSA Certification -. Class I, Division 2, Group A, B, C & D -. Class II, Division 2 Group E, F & G (Group E : up to 320Fr.) 4. Service Factor 1.15 and Temperature rise B are applicable under the condition of sine wave power. 5. Service Factor 1.25 is applicable to motors of 100HP or less with temperature rise F & Non-Hazardous. 6. Temp. code : T3C(160°C) at sine wave						
			Date	DSND	CHKD	CHKD	APPD		
			2025-09-19	S.H. LEE	I.K. KIM	R.G. KIM	S.W. KIM		

[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be done according to maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.

** Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.


Type :	PJP	
Full Load Torque :	8.99	lb.ft
Load moment of Inertia (J) :	42.358	lb.ft2
Motor moment of Inertia (J) :	0.712	lb.ft2

1.5kW	2HP	6 P	60 Hz
Speed at Full Load :			1175 RPM
Rated Voltage	575V	460V	230V
Full Load Current	2.50A	3.13A	6.26A

SPEED VS TORQUE & CURRENT CURVE


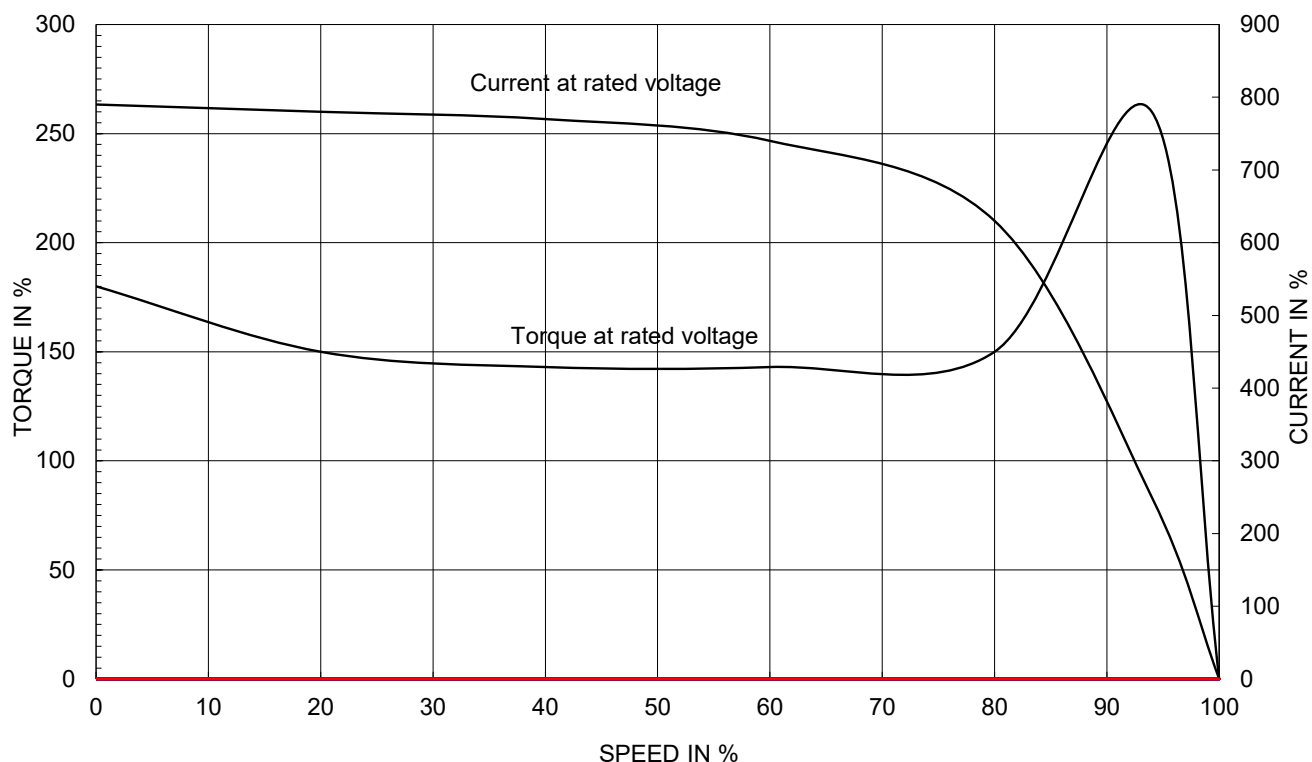


OUTPUT VS EFF., P.F & CURRENT CURVE

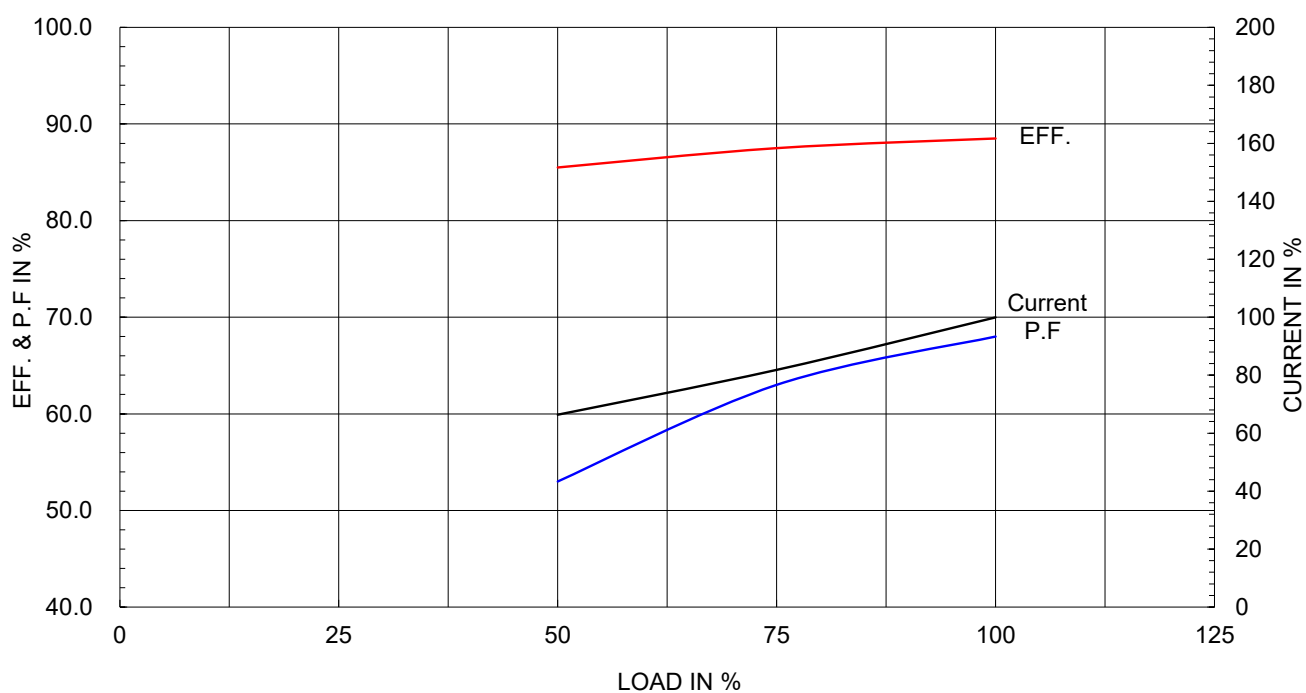

1	2	3	4
▽	50S	REV	DATE
▽▽	12.5S		
▽▽▽	3.2S		
▽▽▽▽	0.4S		

IEEE841

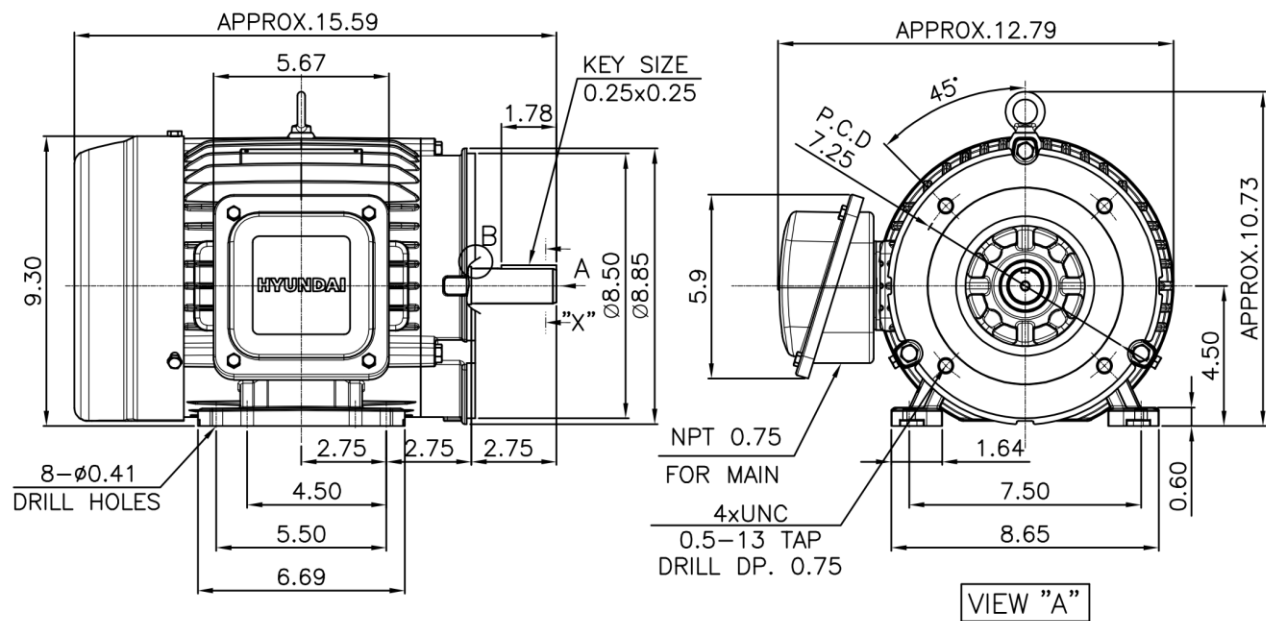


DETAIL - B

NOTE

[TOLERANCE]

- CENTER HEIGHT : +0.00inch - 0.03inch
- SHAFT DIAMETER : +0.000inch - 0.0005inch
- KEYWAY DEPTH : +0.000inch - 0.015inch




SECTION "X-X"

SCALE 5/6

APPD BY	S.Y.KIM	UNIT	inch	SUBJECT	NAMA 182/4TC (Dual hole)	DWG SIZE
CHKD BY	R.G.KIM	SCALE	1/6	TITLE	OUTLINE	A4 (1/6)
CHKD BY		PROJEC'N	3rd Angle			
DSND BY	주유림	DATE	2021-04-29	REF. NO		Sheet No. of
				DWG NO	LM-I2184C4PLV25	Revision No. 0

Cls. I&II, Div. 2

IEEE 841

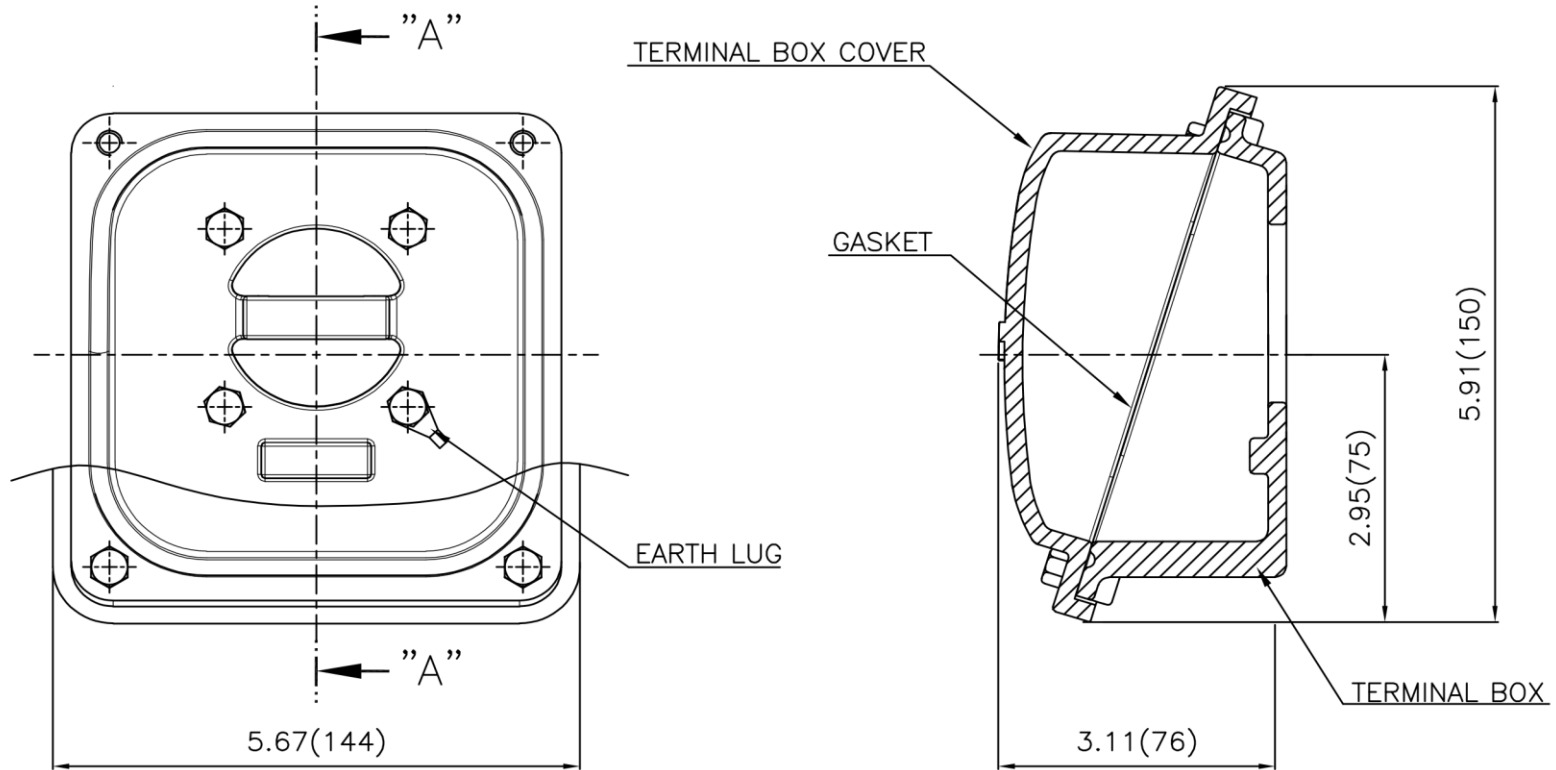

SEC. "A"-"A"

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY	일반기공표	일반계공표
1							1-4 ±0.1	6-30 ±0.5
2							4-18 ±0.2	30-120 ±0.8
3							18-63 ±0.3	120-315 ±1.2
4							63-250 ±0.5	315-1000 ±2.0
5							250- ±0.8	1000- ±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR. 140-180 (CAST IRON)	DWG SIZE	
CHKD BY		SCALE	1/1.5	TITLE	TERMINAL BOX ASS'Y	A3 (1:1.5)	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	네슬피	DATE	2023-10-19	DWG NO	3M-248456	Revision No.	0

