

Customer :  
 Project Name :  
 Project No. :  
 Revision No. :

# SPECIFICATION for INDUCTION MOTOR



0		For Bidding			
No.	DATE	DESCRIPTION	PREPARED BY	CHECKED BY	APPROVED BY



# AC INDUCTION MOTOR DATA SHEET

Catalog No.	HSDE700-36-5812S-IBBRSRSHSP	Item No.		Rev. No.	[ ]
Project Name		Project No.		Quantity	sets

GENERAL SPECIFICATION			PERFORMANCE DATA			
Frame Size	5812S		Rated Output	522 kW 700 HP		
Type	HNE6		Number of Poles	2		
Enclosure(Protection)	Totally Enclosed	/ IP55	Rotor Type	Squirrel Cage		
Method of Cooling	IC411(FC)		Starting Method*	D.O.L		
Rated Frequency	60 Hz		Rated Voltage	575 V	460 V	230 V
Number of Phases	3		Current	Full Load	614.7 A	768.4 A 1,536.8 A
Insulation Class	F			Locked-rotor**	720 %	720 % 720 %
Temp. Rise at full load (by resistance method)			Efficiency			
at 1.0 S.F	80 deg. C		50% Load		92.8 %	
Motor Location	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor		75% Load		94.8 %	
Altitude	Less than 1,000 meter		100% Load		95.8 %	
Relative Humidity	Less than 80 %		Power Factor(p.u)			
Ambient Temp.	40 deg. C (Max.)		50% Load		0.740	
Duty Type	Continuous ( S1 )		75% Load		0.840	
Service Factor	1.15		100% Load		0.890	
Mounting	B3		Speed at Full Load	3570 r.p.m		
Bearing	Type	Anti-Friction	Torque			
	DE/N-DE	6316C3 / 6316C3-INS.	Full Load		1,030.1 lb.ft	
	Lubricant	Grease(Polyrex-EM)	Locked-rotor**		150 %	
External Thrust	Not applicable		Breakdown**		250 %	
Coupling Method	<input checked="" type="checkbox"/> Direct <input type="checkbox"/> V-belt		Moment of Inertia (J)			
Shaft Extension	Single		Load(Max.)		513.845 lb.ft2	
Terminal Box	Main	Steel	Motor		121.840 lb.ft2	
	Aux.	Yes	Sound Pressure Level (No-load & mean value at 1m from motor)			
	Location	Refer to Outline Drawing			89 dB(A)	
Application			Vibration		3.8 mm/sec (peak)	
Area classification	Hazardous		Permissible number of consecutive starts		Cold 2 times Hot 1 time	
Type of Ex-Protection	Class I, Division 2		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)	

ACCESSORIES
*. B.T.D.(Pt 100 Ω at 0°C,Single) : 2EA/Motor
*. W.T.D.(Pt 100 Ω at 0°C) : 2EA/Ph.
*. Space Heater : 1EA/Motor










SPARE PARTS
1. Spare Axial Fan (C.W Direction)

SUBMITTAL DRAWING			
Outline Dimension Drawing		Motor Weight(Approx.)	
B3	LM-T5812B3C7001	6730 lb.	

REMARK
1. Premium efficiency according to NEMA MG1
2. Inverter Duty @ 1.0 Service Factor & F Temperature rise -. 10:1 VT -. 2:1 CT
3. NDE side : Insulated bearing
4. CSA Certification -. Class I, Division 2, Group A, B, C & D; Temp code : T3A
5. Shaft material : AISI4140
6. Uni-directional CCW viewed from drive end.

Date	DSND	CHKD	CHKD	APPD
2024-09-10	S.H. Lee	I.K. Kim	R.G. Kim	S.W. Kim


[Note] Others not mentioned in this data sheet shall be in accordance with maker standard.  
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.  
 Inspection and performance test shall be done according to maker standard, if not mentioned.  
 \* In case of Inverter-Fed Motor, performance data is based on sine wave tests. It may be different from test data of Inverter combined motor.  
 \*\* Data is based on rated voltage & frequency and is expressed as a percentage of full-load value.

1		2		3		4																																																																																																																																																																																											
REV	DATE	CONTENTS				REVD BY	CHKD BY	CHKD BY	APPD BY																																																																																																																																																																																								
<p><b>4.72</b></p>																																																																																																																																																																																																	
<table border="1"> <tr> <td colspan="5" style="text-align: center;"><b>CROWN TRITON</b></td> <td colspan="2" style="text-align: center;"></td> <td colspan="3" style="text-align: center;"></td> </tr> <tr> <td colspan="5" style="text-align: center;"><b>Premium Efficiency AC 3 Phase Motor</b></td> <td colspan="5"></td> </tr> <tr> <td colspan="2">700HP</td> <td colspan="2">2P</td> <td colspan="2">460V</td> <td colspan="4">Cat. No. HSDE700-36-5812S-IBBRSRSHSP</td> </tr> <tr> <td colspan="2">Model</td> <td colspan="2">LATER</td> <td colspan="2">INS. Class</td> <td colspan="2">F</td> <td colspan="2">Amps</td> <td colspan="1">768.4</td> </tr> <tr> <td colspan="2">Type</td> <td colspan="2">HNE6</td> <td colspan="2">Duty</td> <td colspan="2">CONT</td> <td colspan="2">Code</td> <td colspan="1">G</td> </tr> <tr> <td colspan="2">Amb.</td> <td colspan="2">40°C</td> <td colspan="2">Hertz</td> <td colspan="2">60Hz</td> <td colspan="3"></td> </tr> <tr> <td colspan="2">Frame</td> <td colspan="2">5812S</td> <td colspan="2">Encl.</td> <td colspan="2">TEFC</td> <td colspan="2">S.F.</td> <td colspan="1">1.15</td> </tr> <tr> <td colspan="2">RPM</td> <td colspan="2">3570</td> <td colspan="2">NEMA Nom. Eff.</td> <td colspan="2">95.8%</td> <td colspan="3"></td> </tr> <tr> <td colspan="2">Bearing</td> <td colspan="2">Drive</td> <td colspan="2">6316C3</td> <td colspan="2">S.F.1.00 (2:1 C.T., 10:1 V.T., NEMA-MG1 Part31)</td> <td colspan="2">3/4 Eff.</td> <td colspan="1">94.8%</td> </tr> <tr> <td colspan="2">Opp.</td> <td colspan="2">6316C3-INS.</td> <td colspan="2">NEMA Design</td> <td colspan="2">B Torque</td> <td colspan="3"></td> </tr> <tr> <td colspan="2">Usable at</td> <td colspan="9">50Hz 535HP 380V 720.89A 2970rpm S.F.: 1.15 Eff.: 95.8% Code: H</td> </tr> <tr> <td colspan="2">Usable at</td> <td colspan="9">50Hz 535HP 400/415V 692.72/675.37A 2972/2975rpm S.F.: 1.15 Eff.: 95.8/95.81% Code: J/J</td> </tr> <tr> <td colspan="2">CSA Certified for</td> <td colspan="4">CLASS I, Div. 2, Gr. A, B, C &amp; D</td> <td colspan="2">Temp. Code</td> <td colspan="2">Frame</td> <td colspan="1">580FR</td> </tr> <tr> <td colspan="2"></td> <td colspan="4"></td> <td colspan="2">(sine wave)</td> <td colspan="2">Maximum Amb.</td> <td colspan="1">50°C</td> </tr> <tr> <td colspan="2"></td> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">T3A</td> <td colspan="1">(180°C)</td> </tr> <tr> <td colspan="2">No.</td> <td colspan="2">-</td> <td colspan="2">Date</td> <td colspan="2">-</td> <td colspan="2">Weight</td> <td colspan="1">6730 lb</td> </tr> <tr> <td colspan="2">4M-136358</td> <td colspan="2"></td> <td colspan="2">Made in Korea H1</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="1"></td> </tr> </table>										<b>CROWN TRITON</b>										<b>Premium Efficiency AC 3 Phase Motor</b>										700HP		2P		460V		Cat. No. HSDE700-36-5812S-IBBRSRSHSP				Model		LATER		INS. Class		F		Amps		768.4	Type		HNE6		Duty		CONT		Code		G	Amb.		40°C		Hertz		60Hz					Frame		5812S		Encl.		TEFC		S.F.		1.15	RPM		3570		NEMA Nom. Eff.		95.8%					Bearing		Drive		6316C3		S.F.1.00 (2:1 C.T., 10:1 V.T., NEMA-MG1 Part31)		3/4 Eff.		94.8%	Opp.		6316C3-INS.		NEMA Design		B Torque					Usable at		50Hz 535HP 380V 720.89A 2970rpm S.F.: 1.15 Eff.: 95.8% Code: H									Usable at		50Hz 535HP 400/415V 692.72/675.37A 2972/2975rpm S.F.: 1.15 Eff.: 95.8/95.81% Code: J/J									CSA Certified for		CLASS I, Div. 2, Gr. A, B, C & D				Temp. Code		Frame		580FR							(sine wave)		Maximum Amb.		50°C									T3A		(180°C)	No.		-		Date		-		Weight		6730 lb	4M-136358				Made in Korea H1						
<b>CROWN TRITON</b>																																																																																																																																																																																																	
<b>Premium Efficiency AC 3 Phase Motor</b>																																																																																																																																																																																																	
700HP		2P		460V		Cat. No. HSDE700-36-5812S-IBBRSRSHSP																																																																																																																																																																																											
Model		LATER		INS. Class		F		Amps		768.4																																																																																																																																																																																							
Type		HNE6		Duty		CONT		Code		G																																																																																																																																																																																							
Amb.		40°C		Hertz		60Hz																																																																																																																																																																																											
Frame		5812S		Encl.		TEFC		S.F.		1.15																																																																																																																																																																																							
RPM		3570		NEMA Nom. Eff.		95.8%																																																																																																																																																																																											
Bearing		Drive		6316C3		S.F.1.00 (2:1 C.T., 10:1 V.T., NEMA-MG1 Part31)		3/4 Eff.		94.8%																																																																																																																																																																																							
Opp.		6316C3-INS.		NEMA Design		B Torque																																																																																																																																																																																											
Usable at		50Hz 535HP 380V 720.89A 2970rpm S.F.: 1.15 Eff.: 95.8% Code: H																																																																																																																																																																																															
Usable at		50Hz 535HP 400/415V 692.72/675.37A 2972/2975rpm S.F.: 1.15 Eff.: 95.8/95.81% Code: J/J																																																																																																																																																																																															
CSA Certified for		CLASS I, Div. 2, Gr. A, B, C & D				Temp. Code		Frame		580FR																																																																																																																																																																																							
						(sine wave)		Maximum Amb.		50°C																																																																																																																																																																																							
								T3A		(180°C)																																																																																																																																																																																							
No.		-		Date		-		Weight		6730 lb																																																																																																																																																																																							
4M-136358				Made in Korea H1																																																																																																																																																																																													
<p><b>2.36</b></p>																																																																																																																																																																																																	
APPD BY		S.Y.KIM		UNIT		INCH		SUBJECT		CSA Class I, Division2 Severe Duty (HSDE ,5812)																																																																																																																																																																																							
CHKD BY		I.K.KIM		SCALE		NONE		TITLE		NAMEPLATE DRAWING																																																																																																																																																																																							
CHKD BY		R.G.KIM		PROJEC'N		3rd Angle		REF. NO		4M-136358																																																																																																																																																																																							
DSND BY		S.H.LEE		DATE		2024.06.07		DWG NO		NP-HSDE700-36-5812S-IBBRSRSHSP																																																																																																																																																																																							
								Sheet No.		of																																																																																																																																																																																							
								Revision No.		0																																																																																																																																																																																							


Type :	HNE6	
Full Load Torque :	1030.1	lb.ft
Load moment of Inertia (J) :	513.845	lb.ft2
Motor moment of Inertia (J) :	121.840	lb.ft2


522kW	700HP	2 P	60 Hz
Speed at Full Load :			3570 RPM
Rated Voltage	575V	460V	230V
Full Load Current	614.7A	768.4A	1536.8A

SPEED VS TORQUE & CURRENT CURVE

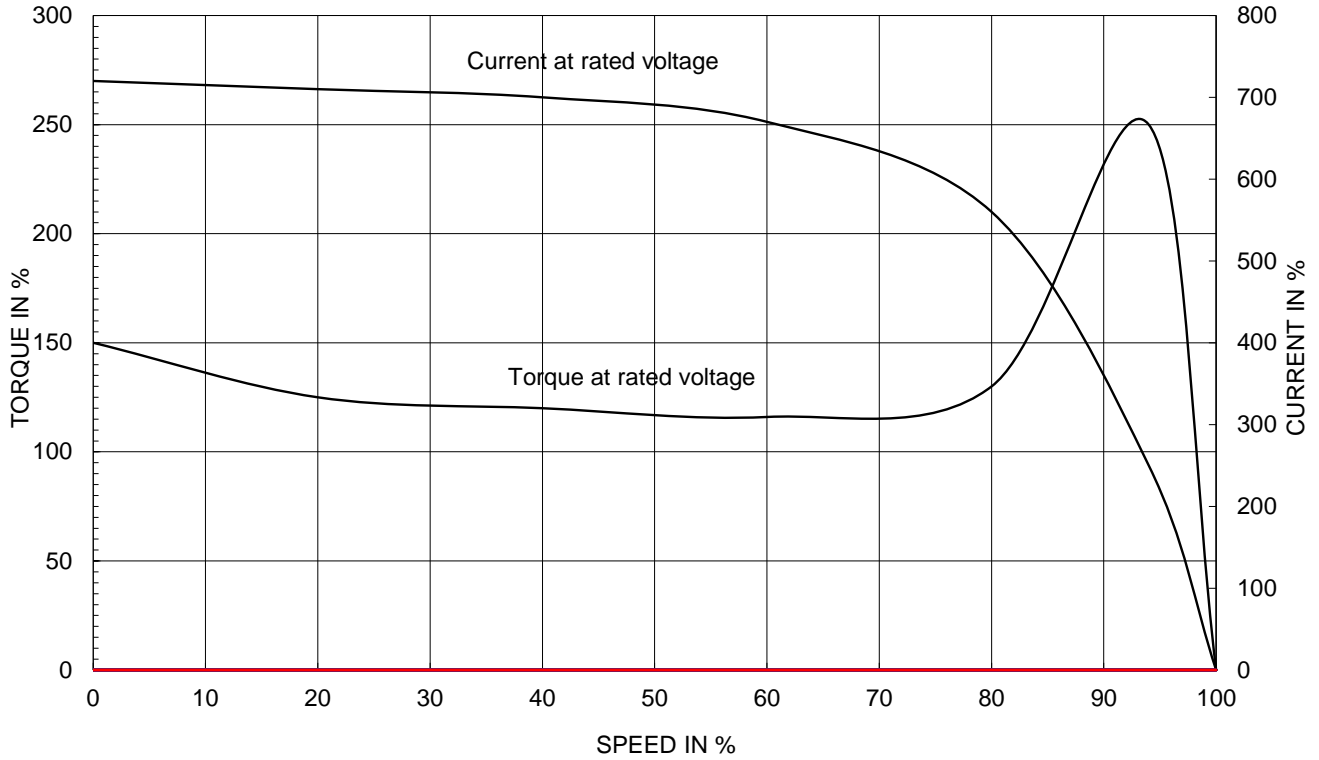

OUTPUT VS EFF., P.F & CURRENT CURVE

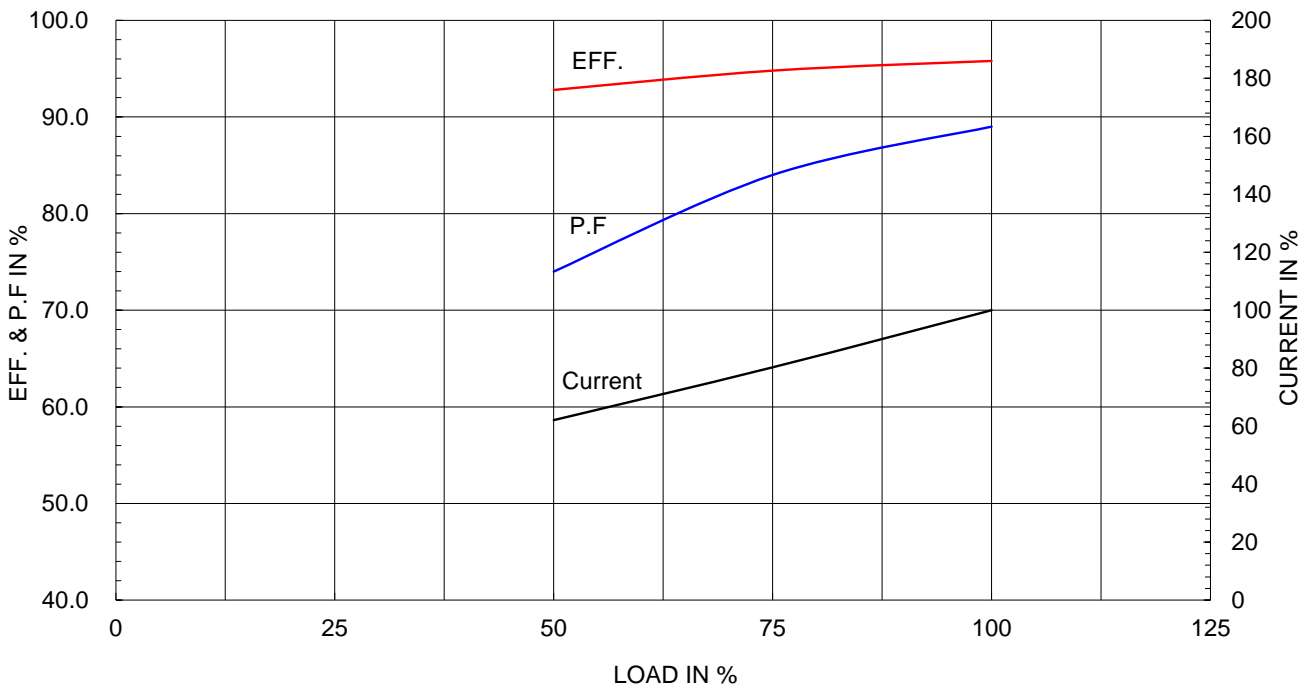

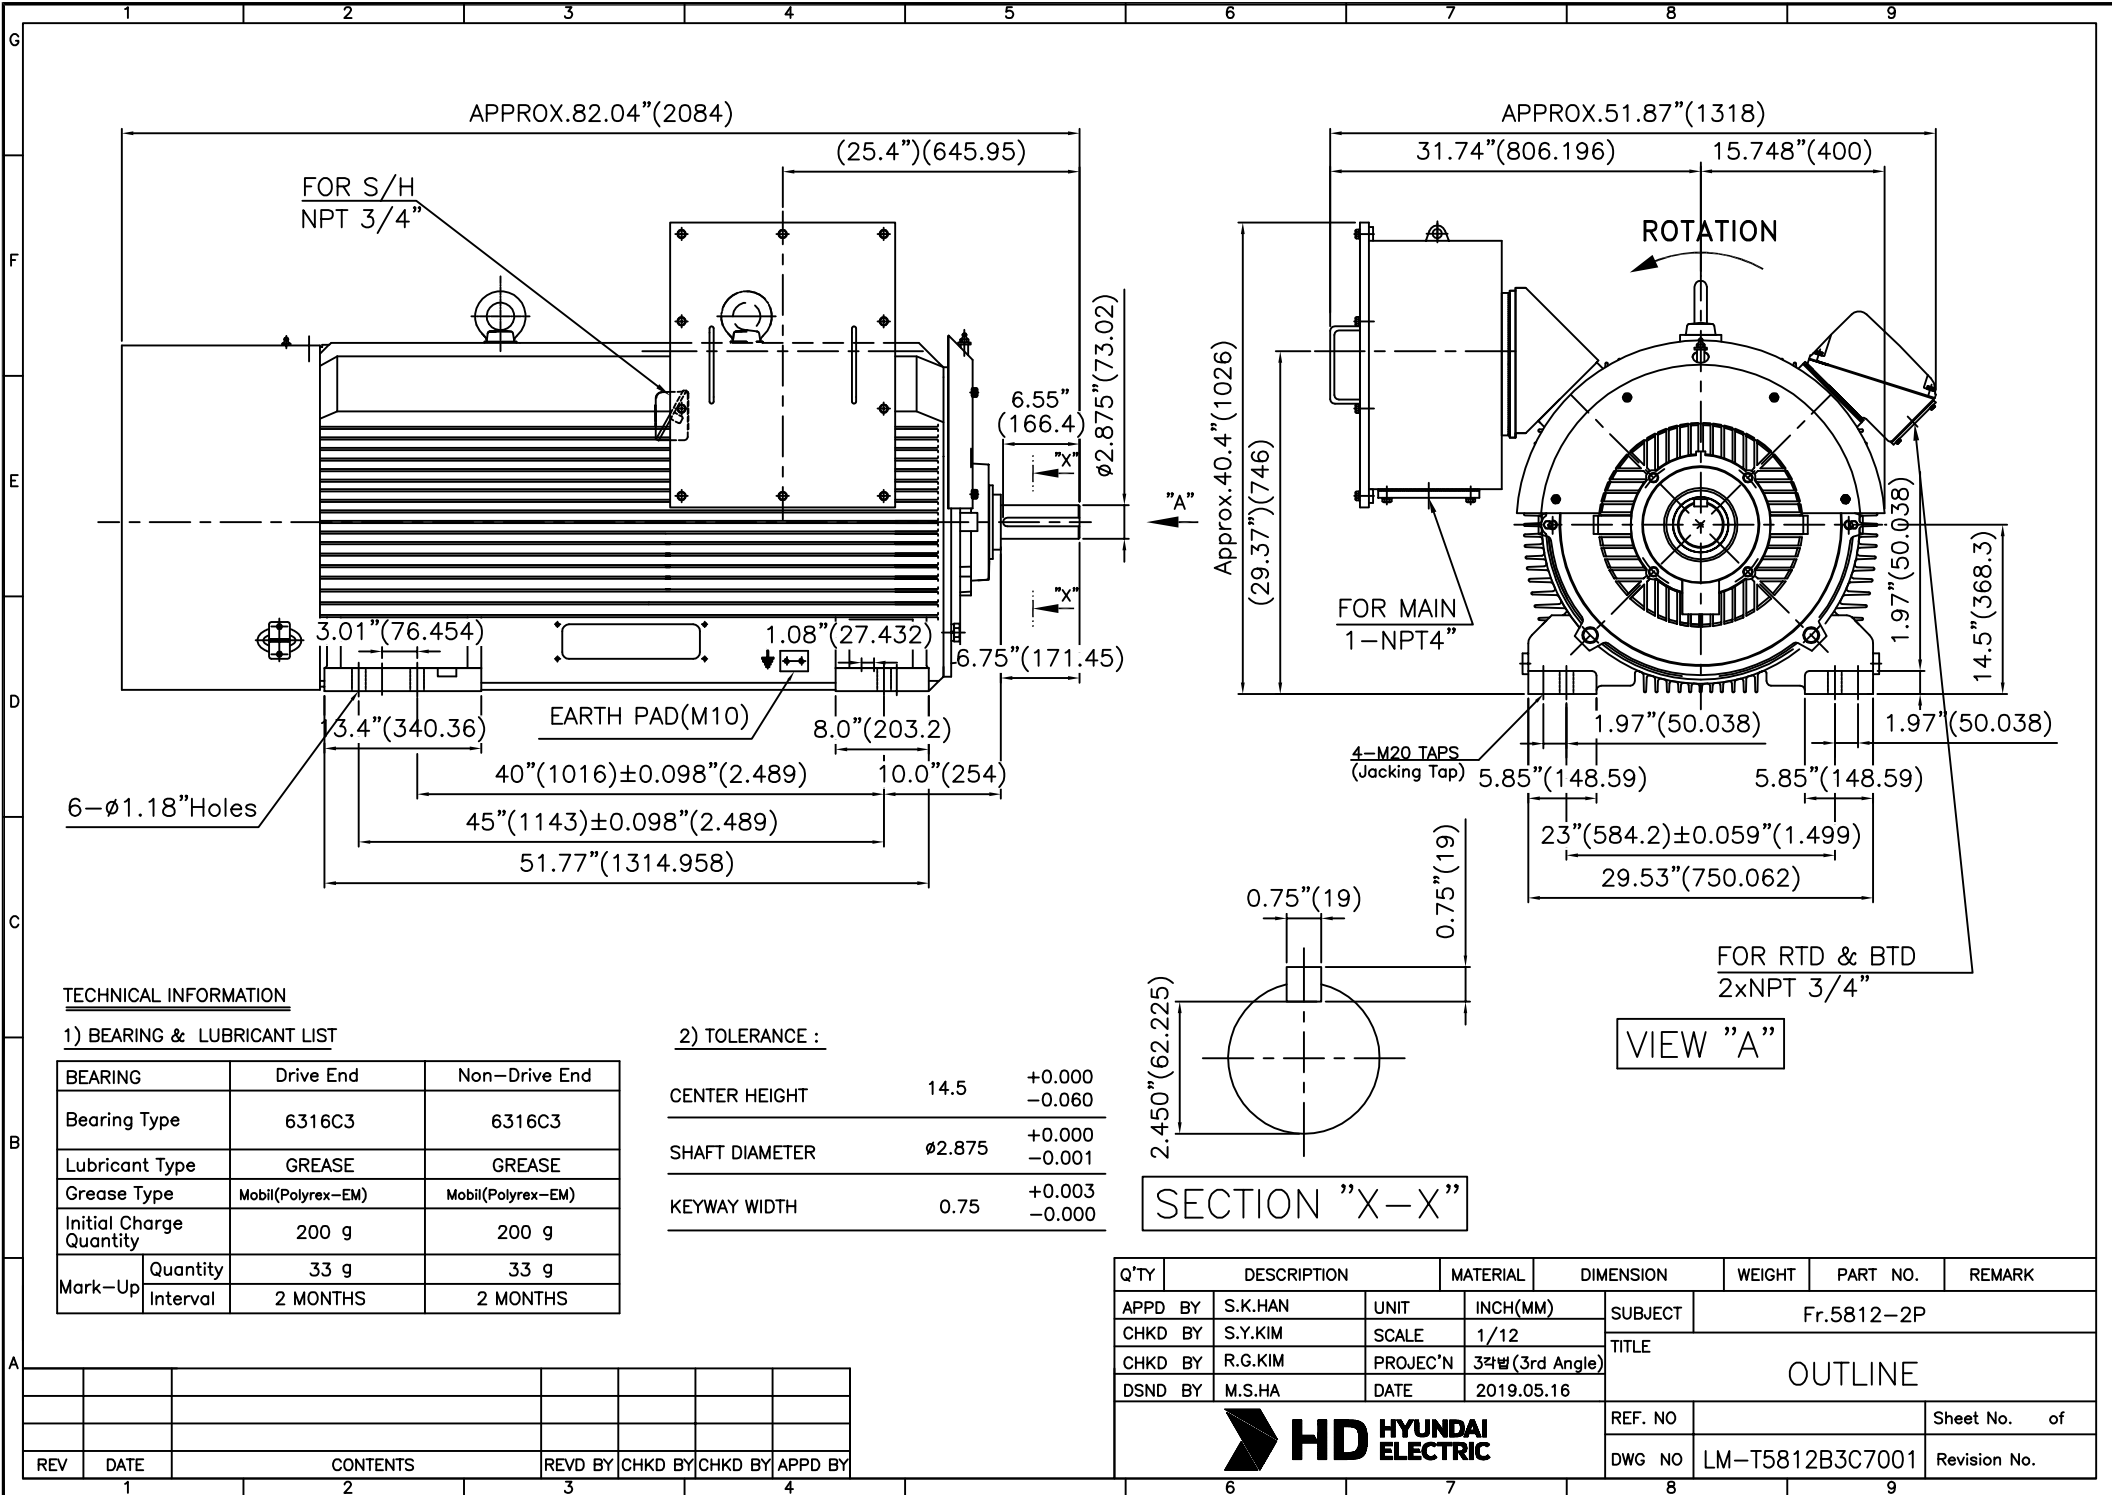

TECHNICAL INFORMATION

1) BEARING & LUBRICANT LIST

BEARING	Drive End	Non-Drive End
Bearing Type	6316C3	6316C3
Lubricant Type	GREASE	GREASE
Grease Type	Mobil(Polyrex-EM)	Mobil(Polyrex-EM)
Initial Charge Quantity	200 g	200 g
Mark-Up	Quantity	33 g
	Interval	2 MONTHS

2) TOLERANCE :



CENTER HEIGHT	14.5	+0.000	-0.060
SHAFT DIAMETER	Ø2.875	+0.000	-0.001
KEYWAY WIDTH	0.75	+0.003	-0.000

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY
1						

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK
APPD BY	S.K.HAN	UNIT	INCH(MM)	SUBJECT	Fr.5812-2P	
CHKD BY	S.Y.KIM	SCALE	1/12	TITLE	OUTLINE	
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)	REF. NO		Sheet No. of
DSND BY	M.S.HA	DATE	2019.05.16	DWG NO	LM-T5812B3C7001	Revision No.



**Cls. I&II, Div. 2  
IEEE 841**

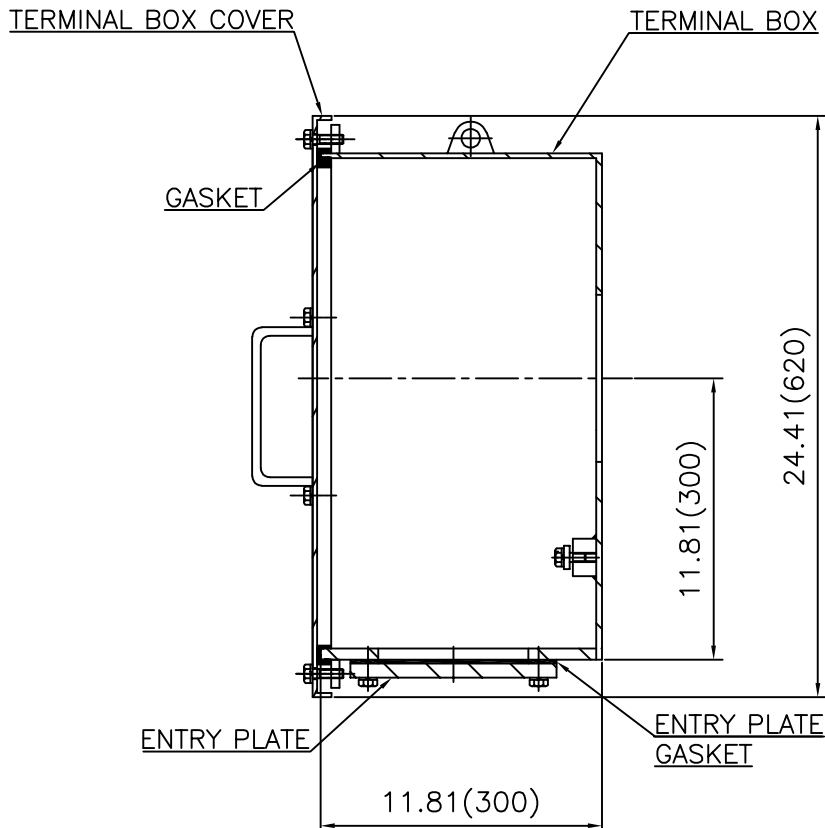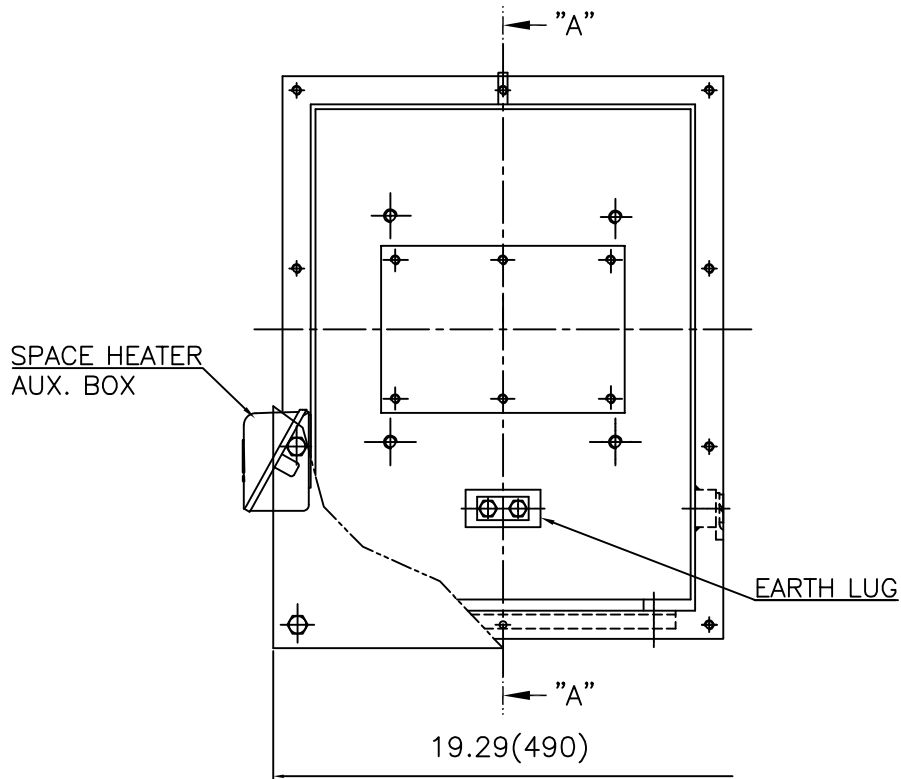

SEC. "A" - "A"

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY
1						
2						
3						
4						

APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR.580 (STEEL)	DWG SIZE	A3 (1:6)
CHKD BY		SCALE	1/6	TITLE	MAIN TERMINAL BOX ASS'Y		
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	REF. NO		Sheet No.	of
DSND BY	배승희	DATE	2023-10-25	DWG NO	3M-248512	Revision No.	0



# Cls. I&II, Div. 2 IEEE 841

본 도면은 HD현대일렉트릭(주) 재산이며  
허가없이 복사할 수 없음 (취급주의)



THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING  
MAY BE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.




REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR.360 (CAST IRON)	DWG SIZE	A3 (1:2.2)
CHKD BY		SCALE	1/1	TITLE	AUX. TERMINAL BOX ASS'Y	REF. NO	
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle	DWG NO		3M-165277	Sheet No.
DSND BY	박승희	DATE	2024-01-18			DWG NO	3M-165277

**Cls. I&II, Div. 2  
IEEE 841**

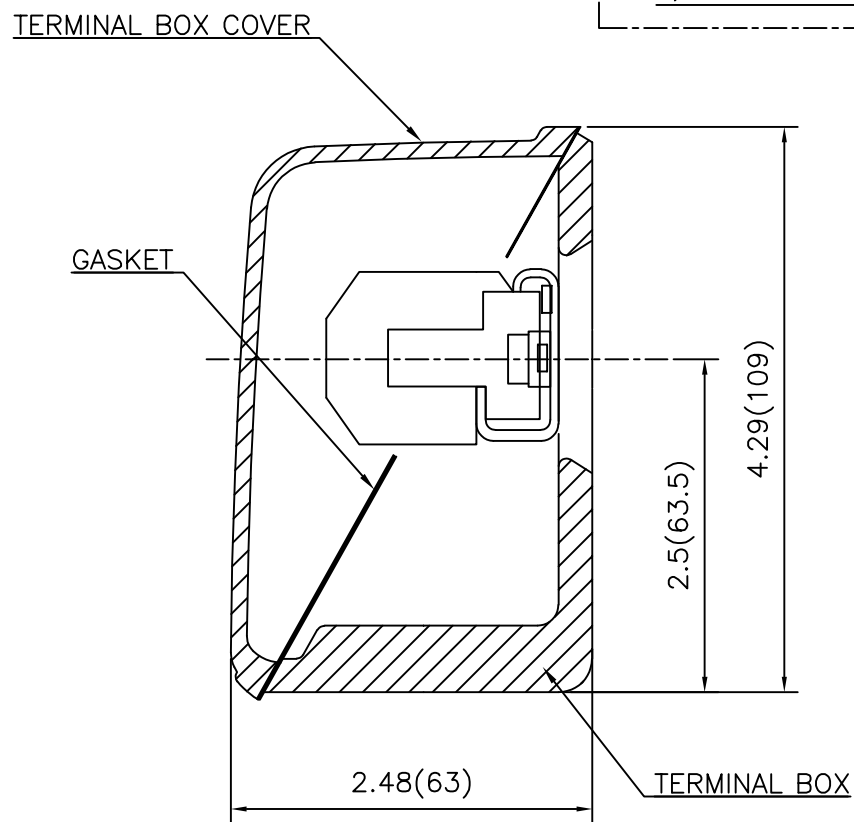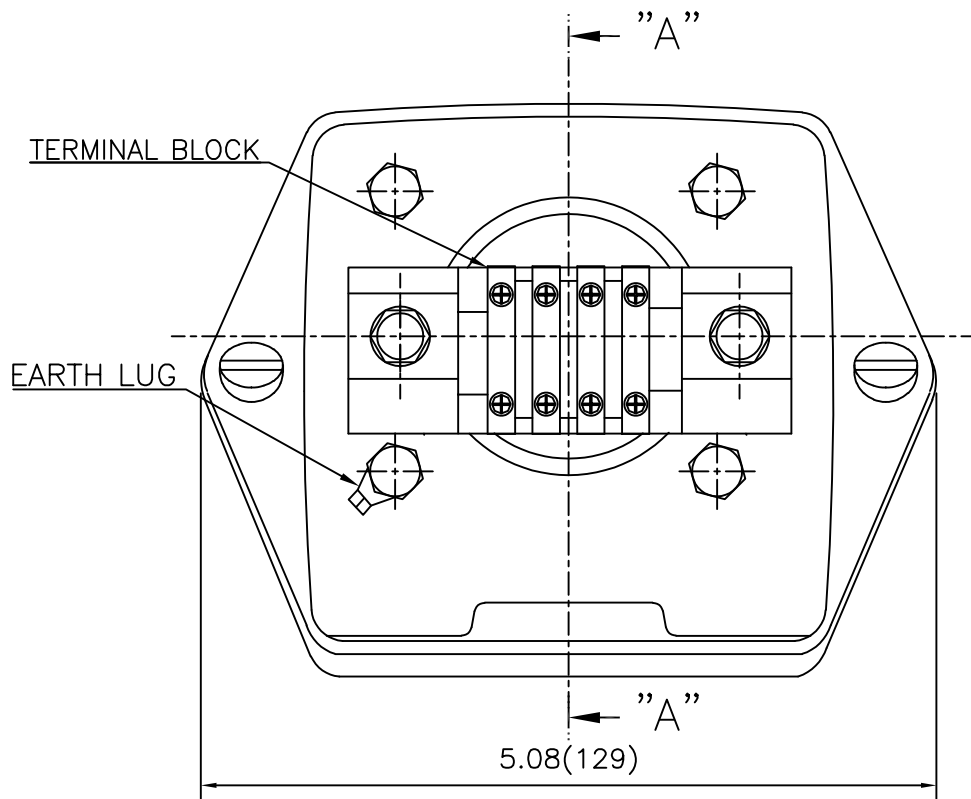

SEC. "A" - "A"

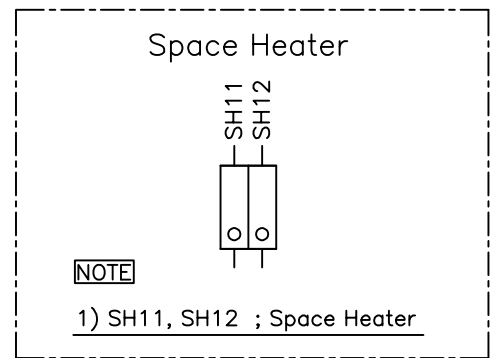

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

APPD BY	S.Y.KIM	UNIT	inch(mm)	SUBJECT	FR.180 (CAST IRON)	DWG SIZE
CHKD BY		SCALE	1/1	TITLE	SUB. TERMINAL BOX ASS'Y	A3 (1:1.1)
CHKD BY	R.G.KIM	PROJEC'N	3rd Angle			
DSND BY	배승희	DATE	2024-01-18			
				REF. NO		Sheet No. of
				DWG NO	3M-165278	Revision No. 0